
## ASME Air Receiver Manifold

## Features:

- built to ASME Code, National Board registeredconforms to OSHA standards 1910.169 and 1926.306
- 7 gallon capacity

- painted safety orange
- all openings are female NPT thread
- working pressure: 200 PSI

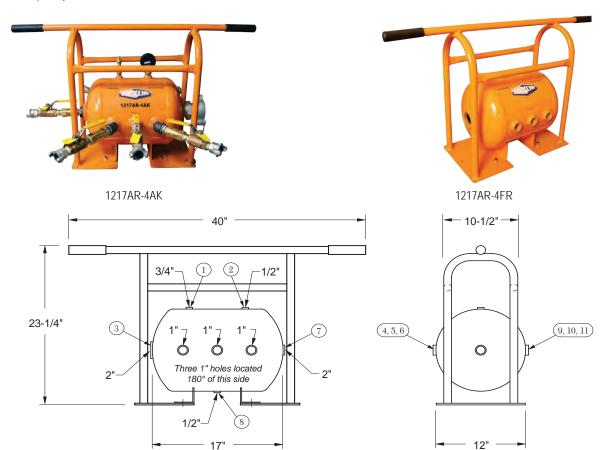

Dixon 1217AR-4AK air receiver manifold assembly with Air King outlet ports includes the following components:				
Part # / Locations	Qty	Description	Price/E	Price
1217AR-4	1	ASME compressed air receiver		\$1210.00
1217FRAME	1	protective frame		400.00
Location 1	1	HB2F6M ¾" male x ¼" female hex bushing	\$7.85	7.85
	1	GL345 0-300 PSI gauge	18.95	18.95
Location 2	1	HB2F4M 1/2" male x 1/4" female hex bushing	4.27	4.27
	1	SV200 safety pop-off valve	35.75	35.75
Location 3	1	GM28 2" male spud	54.00	54.00
	1	B27SC wing nut cap	82.25	82.65
Locations	6	HB1075G 1" male x ¾" female bushings	6.55	39.30
4, 5, 6, 9,	6	BCN75 ¾" brass hex nipples	7.50	45.00
10, 11	6	BBLV75 ball valves	69.85	419.10
	6	SCVS6 safety shut-off valves	99.76	598.56
	6	AM7 Air King universal couplings	8.50	51.00
	4	SE45100 45° street elbow (1 each in locations 4, 6, 9 and 11 only)	9.20	36.80
Location 7	1	HB2075 2" male x 3/4" female bushing	8.45	8.45
	1	BCN75 ¾" brass hex nipples	7.50	7.50
	1	BBLV75 ball valve	69.85	69.85
	1	SCVS6 safety shut-off valve	99.76	99.76
	1	AM7 Air King universal coupling	8.50	8.50
Location 8	1	HB2F4M 1/2" male x 1/4" female hex bushing	4.27	4.27
	1	D04 ¼" drain cock	4.95	4.95
		Labor cost for assembly of complete unit		320.00
1217AR-4AK	1	7 gallon ASME compressed air receiver manifold complete assembly with Air King		3526.11
Tank and Frame only				
1217AR-4FR	1	7 gallon ASME compressed air receiver with frame only		\$1610.00