


## Wilkerson Compact Filter / Regulators

Over-under units are space savers and provide for installation in tight areas. One common inlet/outlet for both filter and regulator saves on piping costs.

F



with guard




### Features:

- 0-125 PSIG adjusting range
- 5 micron reusable element
- 5 oz. bowl
- self-relieving standard
- diaphragm operated
- quick-disconnect bowl guard with integral plastic bowl and safety latch standard
- Two 1/4" gauge ports are provided in either side of the regulator body for installation of a gauge or to use as an additional outlet port. (Plug unused port(s).)
- supplied with GC230 gauge
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
  - metal bowl: **200 PSIG** (13.8 bar) and **32°F to 150°F** (0°C to 65.5°C)

Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	64.0	<b>CB6-02AG</b>	<b>\$282.30</b>	<b>CB6-02MG</b>	<b>\$225.50</b>	<b>CB6-02AGMB</b>	<b>\$299.30</b>	<b>CB6-02MGMB</b>	<b>\$242.50</b>
3/8"	70.0	<b>CB6-03AG</b>	<b>282.30</b>	<b>CB6-03MG</b>	<b>225.50</b>	<b>CB6-03AGMB</b>	<b>299.30</b>	<b>CB6-03MGMB</b>	<b>242.50</b>
1/2"	70.0	<b>CB6-04AG</b>	<b>282.30</b>	<b>CB6-04MG</b>	<b>225.50</b>	<b>CB6-04AGMB</b>	<b>299.30</b>	<b>CB6-04MGMB</b>	<b>242.50</b>



with metal bowl

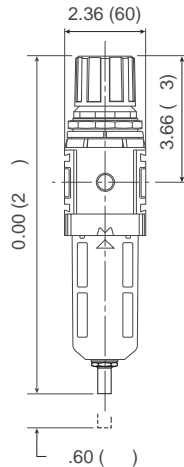

### Features:

- 0-125 PSIG adjusting range
- 5 micron element
- 4 oz. bowl
- self-relieving standard
- spring-loaded diaphragm
- To increase regulated pressure, pull adjusting knob and turn clockwise. To reduce pressure, turn knob counter clockwise. To lock knob, push down.
- Two 1/4" gauge ports located on the front and rear faces of the body. These ports may be used as additional regulated ports or for pressure gauges. (Plug unused port(s).)
- supplied with GC230 gauge
- maximum operating conditions:
  - transparent bowl: **150 PSIG** (10.3 bar) and **32°F to 125°F** (0°C to 52°C)
  - metal bowl: **250 PSIG** (17.2 bar) and **32°F to 150°F** (0°C to 65.5°C)

Size	Flow (SCFM)	With Transparent Bowl and Guard				With Metal Bowl with Sight Glass			
		Automatic Drain		Manual Drain		Automatic Drain		Manual Drain	
		Part #	Price/E	Part #	Price/E	Part #	Price/E	Part #	Price/E
1/4"	88	<b>B18-02AG</b>	<b>\$243.10</b>	<b>B18-02MG</b>	<b>\$183.45</b>	<b>B18-02AGMB</b>	<b>\$247.15</b>	<b>B18-02MGMB</b>	<b>\$187.50</b>
3/8"	117	<b>B18-03AG</b>	<b>243.10</b>	<b>B18-03MG</b>	<b>183.45</b>	<b>B18-03AGMB</b>	<b>247.15</b>	<b>B18-03MGMB</b>	<b>187.50</b>
1/2"	121	<b>B18-04AG</b>	<b>243.10</b>	<b>B18-04MG</b>	<b>183.45</b>	<b>B18-04AGMB</b>	<b>247.15</b>	<b>B18-04MGMB</b>	<b>187.50</b>

See page 235 for filter/regulator accessories.



FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 100 PSIG inlet pressure.