


Continuous Flow Reels

Features:

- allows immediate and continuous flow of water at all times during deployment of hose
- one-person operation
- use with non-collapsible hose shown on page 635
- powder coated with an electrostatically-applied, thermally-fused, red polyester finish steel drum
- rims and universal mounting stand
- female NPT inlet with male NST (NH) hose thread outlet

A flexible connector assembly must be installed directly between the hose reel inlet hub and the water supply.
Failure to use the flexible connector assembly shall void the warranty.

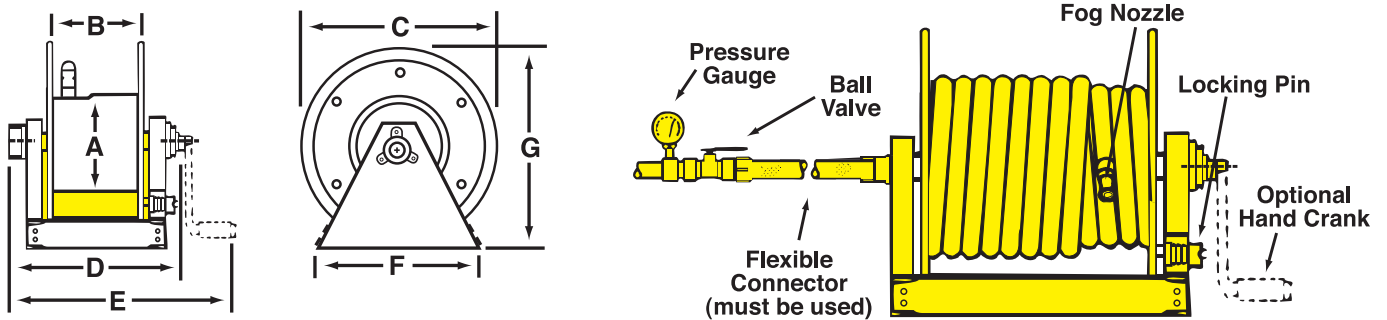

Dimensions

Part #	Hose Size and Capacity			A	B	C	D	E	F	G	Inlet Size (inches)	Outlet Size (inches)	Wt. (lbs)	Price/E
	3/4"	1"	1 1/2"											
CFR47-1-100	150	125	---	10 1/2	11 1/2	24	19 1/4	24	21 3/4	26	1	1	53	\$1972.75
CFR47-150-100	250	150	100	10 1/2	20 1/2	24	28 1/4	33	21 3/4	26	1 1/2	1 1/2	60	1972.75
CFR47-1-200	400	300	150	10 1/2	28	24	35 1/4	40 1/2	21 3/4	26	1 1/2	1 1/2	64	2041.65
CFR47-150-200	---	---	200	10 1/2	34	24	41 1/4	46 1/2	21 3/4	26	1 1/2	1 1/2	72	2103.00

Optional Accessories

Description	Part #	Price/E
1" x 18" flexible connector (male NPT x male NPT)	DX2836	\$175.00
1 1/2" x 18" flexible connector (male NPT x male NPT)	DX2839	175.00
hand crank	CFR-HC	150.00
repair kit: contains O-ring, PTFE retaining ring for the inlet casting, spacer washer, and 2 steel retaining rings for the manifold	CFR-RK	128.00



Continuous Flow Hose Reel Covers

Cover for	Dimensions H x W x D	Vinyl Part #	Price/E
CFR47-1-100	26" x 20" x 26"	CFR47-C1	\$131.00
CFR47-1-200	26" x 36" x 26"	CFR47-C2	178.00
CFR47-150-100	26" x 29" x 26"	CFR47-C3	182.00
CFR47-150-200	26" x 42" x 26"	CFR47-C4	200.00

