

Kellems® Wire Management Products  
 PG and Metric Threaded Deluxe Cord Grips  
 Deluxe Cord Grips

# HUBBELL

## Features

- Aluminum Fiting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

## Ordering Information

Description	Hub Size	UPC	Catalog Number
Straight Panzergerwinde Male Thread, Liquidtight	PG29	783585327761	074PG29021




## Listings

UL Listed  
 CSA Certified

## Specifications

Strand	Galvanized Steel
Body	Aluminum
Nut	Aluminum
Bushing	Neoprene

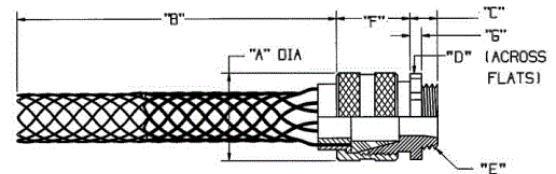

## Performance

Environmental	
Flammability	UL 94HB (Strand grip), UL 94V-2 (Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

## Online Resources

Customer Use Drawing  
 eCatalog  
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

