
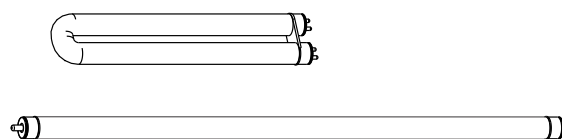


FLUORESCENT EMERGENCY LIGHTING BALLASTS LAMP COMPATIBILITY

Cat. No.	Lumens	Battery	Power
BAL650C	300~750	3.6V	14.4 Wh
BAL500	350~450	2.4V	9.6 Wh
BAL700	600~700	3.6V	14.4 Wh
BAL1400	1100~1400	6.0V	24.4 Wh
BAL3000	1450~3500	14.4V	40.0 Wh

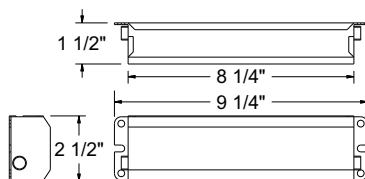


BAL Series

- 120~277V, Fully Automatic Operation
- 280mA Charging Current
- 24Hr Recharging Time
- 90 Minutes of Emergency Operation
- Wireway or Fixture Mount
- Battery, Charger, Inverter Circuit Included

BAL 500

- Compatible with most One-, Two-, Three-, and Four-Lamp Electronic Standard and Dimming AC Ballasts
- Operates:
 - One 17W - 40W T8 - T12,
 - One 13W - 26W 4-Pin Compact
 - One 18W - 36W 4-Pin Long Compact Fluorescent Lamp

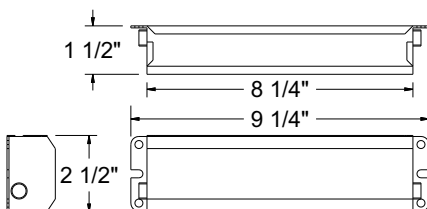

BAL650C-2PIN

- Compatible with most One-, Two-, Three-, and Four-Lamp Electronic Standard and Dimming AC Ballasts
- Operates:
 - One 13W - 26W
 - 2-Pin Compact Fluorescent Lamps with GX23 and G24D Bases



BAL650C-4PIN

- Compatible with most One-, Two-, Three-, and Four-Lamp Electronic Standard and Dimming AC Ballasts
- Operates:
 - One 13W - 42W
 - Two 13W - 39W Twin, Quad, Triple Twin Long Compacts or 2D Lamps

