

GFCI Protected Double Duplex Receptacle Cord Reel

INDUSTRY FIRST!

GFCI Protected Double Duplex Cord Reel

Hubbell's GFCI protected cord reel is an industry first cULus compliant reel, with a manual reset GFCI module and two 20 amp duplex receptacles in a black impact resistant portable outlet box with open neutral protection.

FEATURES


- UL 355/CSA 22.2 No. 308-14
- Two 20A duplex receptacles
- GFCI module with open neutral protection
- 45 feet of cable
- White reel with black impact resistant portable outlet box
- Durable corrosion resistant steel construction
- 12 AWG cord for a full 20A carrying capacity



Industrial Power Cord Reels

Description	Catalog Number
Black portable outlet box with (2) ground fault protected gray duplex receptacles, white reel housing.	HBL45123GF220WM1

Dimensions inch (mm)

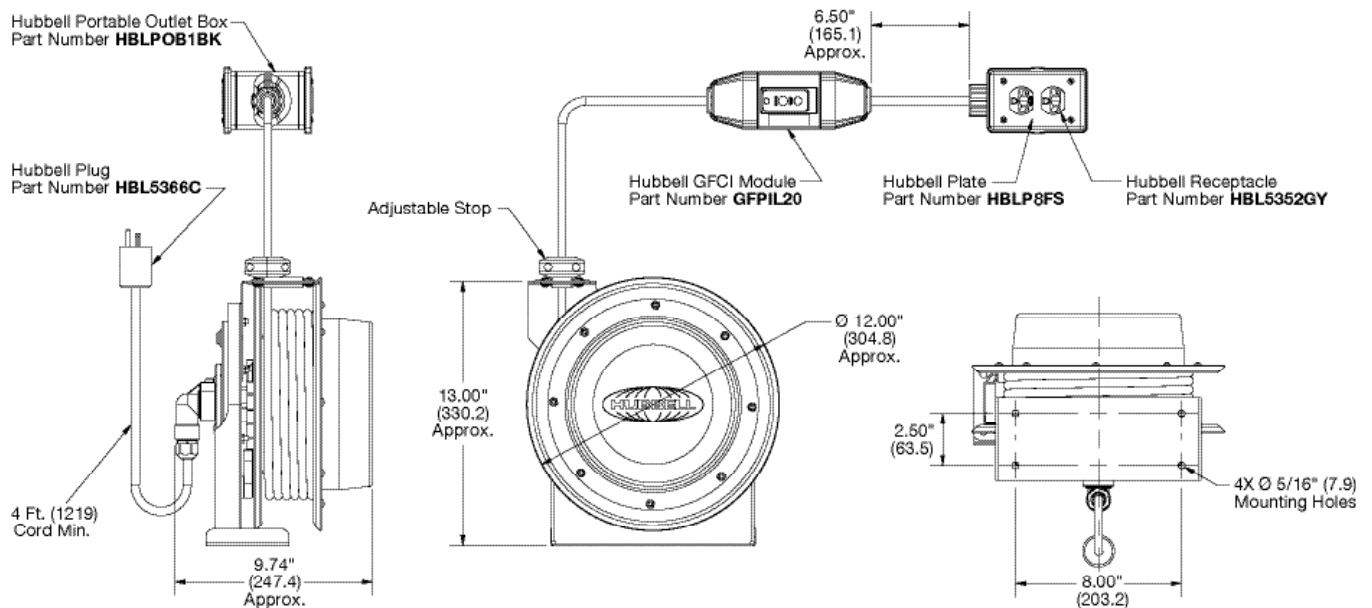

Industrial Power Cord Reels

HUBBELL®
Wiring Device-Kellems

- Durable, corrosion resistant steel construction design with yellow or white powder coat finish
- Multi-position guide arm
- Positive-latch mechanism automatically maintains desired cord length
- 12 AWG cord for greater current carrying capacity
- Plug-in 5 ft. long power cord requires no electrical wiring



HBL45123TL20



HBL45123C



HBL45123TL20



HBL45123R



HBL45123R20WM1



HBL45123GF15



HBL45123GF220WM1



HBL340PB

Industrial Power Cord Reels

Cord End	Cable Feet (m)	Cable Type	NEMA Style	Amps	Volts AC	Weight Lbs. (kg)	Catalog Number
Without cord ends.	50 (15.2)	16/3 SJ	—	10	125	20 (9.1)	HBL50163
Without cord ends.	45 (13.7)	12/3 SJ	—	20	125	21 (9.5)	HBL45123
HBL5269C connector.	45 (13.7)	12/3 SJ	5-15R	15	125	28 (12.7)	HBL45123C
HBL5369C connector.	45 (13.7)	12/3 SJ	5-20R	20	125	28 (12.7)	HBL45123C20 HBL45123C20W
Same as above with white reel housing.							
HBL2313 connector.	45 (13.7)	12/3 SJ	L5-20R	20	125	28 (12.7)	HBL45123TL20 HBL45123TL20W
Same as above with white reel housing.							
Portable outlet box with (1) gray duplex receptacle.	45 (13.7)	12/3 SJ	5-15R	15	125	29 (13.2)	HBL45123R HBL45123R20 HBL45123R20W
Same as above except white.	45 (13.7)	12/3 SJ	5-20R	20	125	29 (13.2)	
Black portable outlet box with (1) gray duplex receptacle, white reel housing.	45 (13.7)	12/3 SJ	5-20R	20	125	29 (13.2)	HBL45123R20WM1
Portable outlet box with (2) gray duplex receptacles.	45 (13.7)	12/3 SJ	5-20R	20	125	29 (13.2)	HBL45123R220 HBL45123R220W
Same as above except white.							
Black portable outlet box with (2) gray duplex receptacles, white reel housing.	45 (13.7)	12/3 SJ	5-20R	20	125	29 (13.2)	HBL45123R220WM1
Portable outlet box with (1) ground fault protected gray duplex receptacle.	45 (13.7)	12/3 SJ	5-15R	15	125	29 (13.2)	HBL45123GF15 HBL45123GF20
Same as above except white.	45 (13.7)	12/3 SJ	5-20R	20	125	29 (13.2)	
Black portable outlet box with (2) ground fault protected gray duplex receptacles, white reel housing.	45 (13.7)	12/3 SJ	5-20R	20	125	25 (11.3)	HBL45123GF220WM1


Note: 15 Amp: Supplied with 5 ft. power supply cord with HBL5266C, 15A straight blade plug. 20 Amp: Supplied with 5 ft. power supply cord with HBL5366C, 20A straight blade plug. Ground fault protected reels supplied with (1) GFM20 and (1) HBLP26FS.

Accessories

Description	Weight Lbs. (kg)	Catalog Number
Pivot base 340° rotation fits all industrial models.	5 (2.3)	HBL340PB
Replacement stop.	.2 (.09)	HBL12BS

Dimensions

Inch (mm)	A	B	C	D	E	F
	13.00"	12.38"	8.00"	2.50"	9.75"	1.25"
	(330)	(314)	(203)	(64)	(248)	(32)

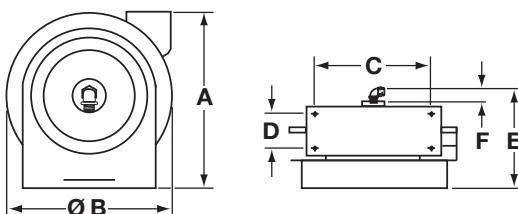

Note: All models have four .625" (15.9) diameter mounting holes.

Listing/Certification

UL 355
CSA C22.2 No. 21.

Environment

Dry, indoor, non-hazardous locations.

Mounting Positions

Wall mount.
Ceiling mount.
Bench mount.

HUBBELL®
Wiring Device-Kellems

www.hubbell.ca/wiring



Hubbell Canada LP • Electrical Systems • 870 Brock Road South • Pickering, ON L1W 1Z8

Tel: (905) 839-1138 • Fax: (905) 839-9108

Printed in Canada. Specifications subject to change without notice.

H3505 06/17