

**SpikeShield® Power Quality Products**  
**15A, 125V AC, 2 Pole, 3 Wire Grounding**  
**Surge Protection Receptacles**

**HUBBELL**

**Features**

- Automatic self-grounding staple
- Distinctive surge symbol provides quick identification
- Power-on indicator light verifies that power is available
- Alert alarm sounds when surge protection is no longer functioning

**Ordering Information**

Description	Device Color	UPC	Catalog Number
Receptacles with light	Blue	783585060170	HBL5262SA




**Listings**

UL Listed File E2186  
 Listed to UL Standards 498  
 CSA Certified to Specification C22.2 No. 42

**Specifications**

Face Material	Nylon
Base Material	Nylon
Power Contact	.031" (.8) Brass
Contact Design	Tandem Modified Bypass
Mounting Strap	.050" (1.3) Steel-Zinc Coated

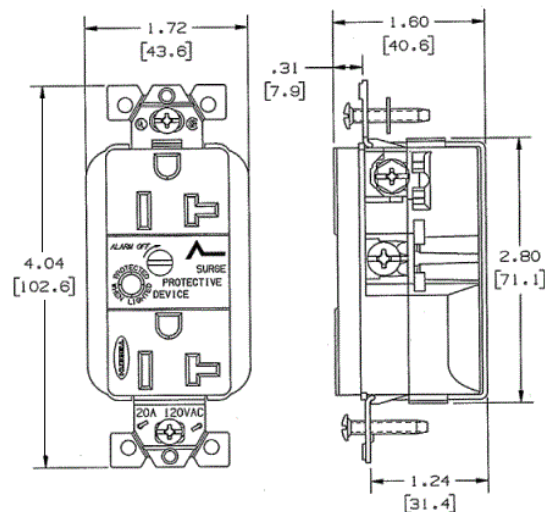

**Performance**

<b>Electrical</b>	
Protection Modes	Normal and Common Modes
Response Time	Approximately 5 ns
Transient Suppression Voltage	Peak Energy (10 X 100 μs), Peak Current (8 X 20 μs) 120V AC + 10% - 15%

<b>Environmental</b>	
Flammability	UL 94V-2
Operating Temperature	32°F to 140°F (0°C to 60°C)

**Online Resources**

Customer Use Drawing  
 eCatalog  
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

