

**UL 1686 C1 Pin and Sleeve**  
**60A, 600/250V AC/DC, 4 Pole, 5 Wire**  
**Insulgrip® Pin and Sleeve Plug**

# HUBBELL

**Features**

- Impact resistant shroud protects sleeves from bending and breaking
- Locking ring provides UL Type 4X watertight, dust-tight seal
- Catalog number and rating visible while in use
- All-Brass sleeve contacts provide reliable electrical contact



**Ordering Information**

<b>Description</b> Pin and Sleeve, Watertight Insulgrip Plug	<b>UPC</b> 783585010663	<b>Catalog Number</b> <b>HBL560PS1W</b>
<b>Device Color</b> Aluminum	<b>Grounding Style</b> Style 1	

**Standards**

UL Standard 1682, UL 50, and UL 1010  
 CSA Certified to CSA Spec. C22.2 No. 159  
 UL Listed and CSA Certified Type 4X

**Specifications**

Housing	Valox® 357
Plug Shroud	Aluminum
Clamp Nut	Nickel Plated Brass
Gland Cap	Rynite® SST35
Retainer	Thermoset Polyester
O-Ring, Gaskets & Seals	Neoprene

**Performance**

**Electrical**  
 Current Interrupting Certified for current interrupting at full rated current

Dielectric Voltage Withstands 3,000V AC  
 Max. Working Voltage 600V AC RMS

**Mechanical**  
 Impact Resistance Per CSA C22.2, No. 182.1, UL 1682  
 Product Identification Identification and ratings are permanently fastened to the device housing  
 Terminal Identification Terminals identified in accordance with UL 1686(1, 2, 3, Green)


**Environmental**  
 Flammability (Enclosure) UL 94V-0 and CSA C22.2 No. 0.17  
 Moisture Resistance Type 3, 4, 4X per UL 50E and CSA 22.2, No. 94  
 Operating Temperatures Max. Continuous 75°C; Min. -40°C w/o impact -25° with impact

**Accessories**

- Cord Clamps and Locking Ring
- Liquidtight Adapters

**Online Resources**

- Customer Use Drawing
- eCatalog
- Installation Instructions

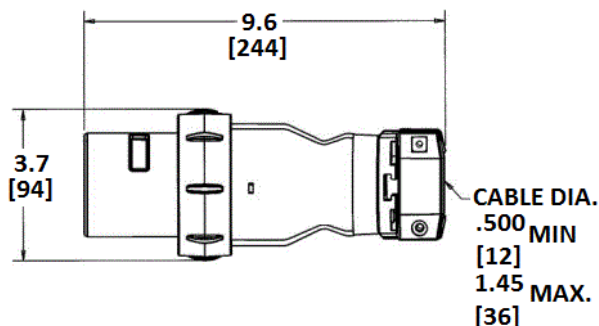

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

