

# Straight Blade Devices 15A, 125V, 2 Pole, 3 Wire Grounding Hospital Grade Valise® Plug

# HUBBELL

## Features

- Hinged one piece body design for easy assembly
- Powerful, offsetting cord grips clamp on individual conductors

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Insulation displacement, white nylon	.300"-.360" (7.6-9.1)	783585016177	HBL8013V

## Listings

UL Listed to UL498 File No. E2186  
Certified to CSA, C22.2, No. 42 File 285  
Fed. Spec. W-C-596  
NEMA® WD-6 Compliant

## Specifications

Housing	Nylon
Blades	Brass
Assembly Screws	Plated Steel
Cable Inserts	PPO

## Performance

### Electrical



Current Interrupting Certified for current interrupting at full rated current  
Dielectric Voltage Withstands 2000V AC minimum

### Mechanical

Product Identification Ratings are a permanent part of the device  
Terminal Accommodation #18 to #16 AWG  
Terminal Identification Terminals identified in accordance with UL 498 and CSA

### Environmental

Flammability UL 94 HB  
IP Suitability IP20  
Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

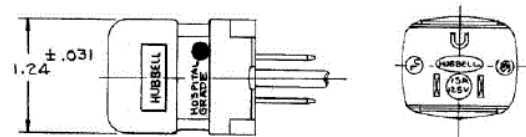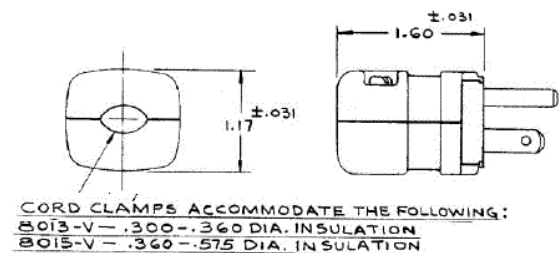

## Resources

Customer Use Drawing  
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

