

Straight Blade Devices  
 50A, 3 Phase 250V AC, 3 Pole, 4 Wire  
 Grounding  
 Single Receptacle

# HUBBELL

## Features

- Catalog number, ratings and certifications molded in face
- Sequenced contacts assure protection
- One piece design power and ground contacts

## Ordering Information

| Description           | Device Color | UPC          | Catalog Number |
|-----------------------|--------------|--------------|----------------|
| Receptacle, black RTP | Black        | 783585015156 | HBL8450A       |

## Listings


UL Listed File E2186  
 CSA Certified  
 NEMA® WD-6 Compliant

## Specifications

|                |                                    |
|----------------|------------------------------------|
| Housing        | Reinforced Thermoplastic Polyester |
| Mounting Plate | .062 in. (1.5) Pre-Plated Steel    |
| Contacts       | Brass                              |
| Ground Shunt   | Brass                              |
| Box Terminals  | Copper                             |

## Performance

|                         |  |
|-------------------------|--|
| <b>Electrical</b>       |  |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |  |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12 AWG through #4 AWG copper wire only                  |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |  |
| Flammability            | UL 94 V-0  |
| IP Suitability          | IP20   |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

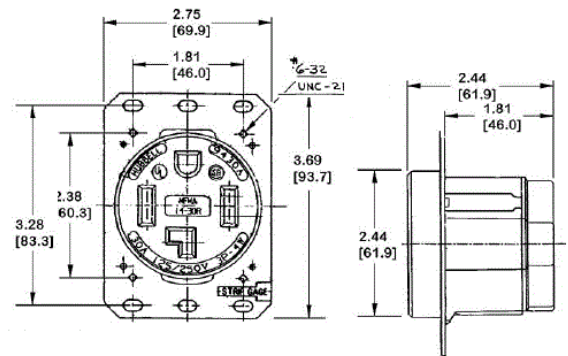

## Accessories

Wallplate or Weatherproof Cover 2.48" Opening

## Resources

Customer Use Drawing  
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

