

Straight Blade Devices 30A, 125/250V, 3 Pole, 3 Wire Non-Grounding Plug

HUBBELL

Features

- Supertough nylon housing
- Gripping ribs provide secure gripping area
- Captive Allen head terminal screws are user-ready

Ordering Information

| Description | Cord Diameter | UPC | Catalog Number |
|-------------------------|----------------------------|--------------|----------------|
| Plug, Insulgrip®, nylon | .625"-1.00" (15.9-25.4) | 783585015699 | HBL9337C |

Listings


UL Listed File E1706
CSA Certified

Specifications

| | |
|---------------|------------------------------------|
| Housing | Supertough Nylon |
| Blade Holder | Reinforced Thermoplastic Polyester |
| Blades | Brass |
| Box Terminals | Copper Alloy |
| Cord Clamps | Reinforced Thermoplastic Polyester |

Performance

| | |
|-------------------------|--|
| Electrical | |
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |
| Mechanical | |
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #12 AWG through #4 AWG copper wire only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |
| Environmental | |
| Flammability | UL 94 HB |
| IP Suitability | IP20 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

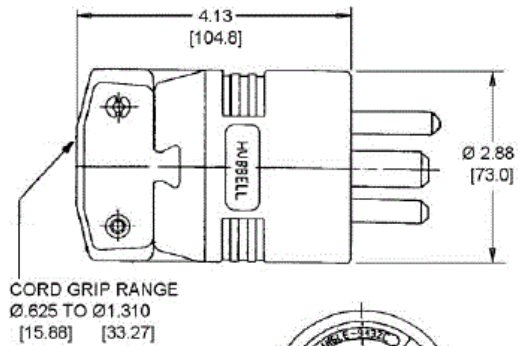

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

