
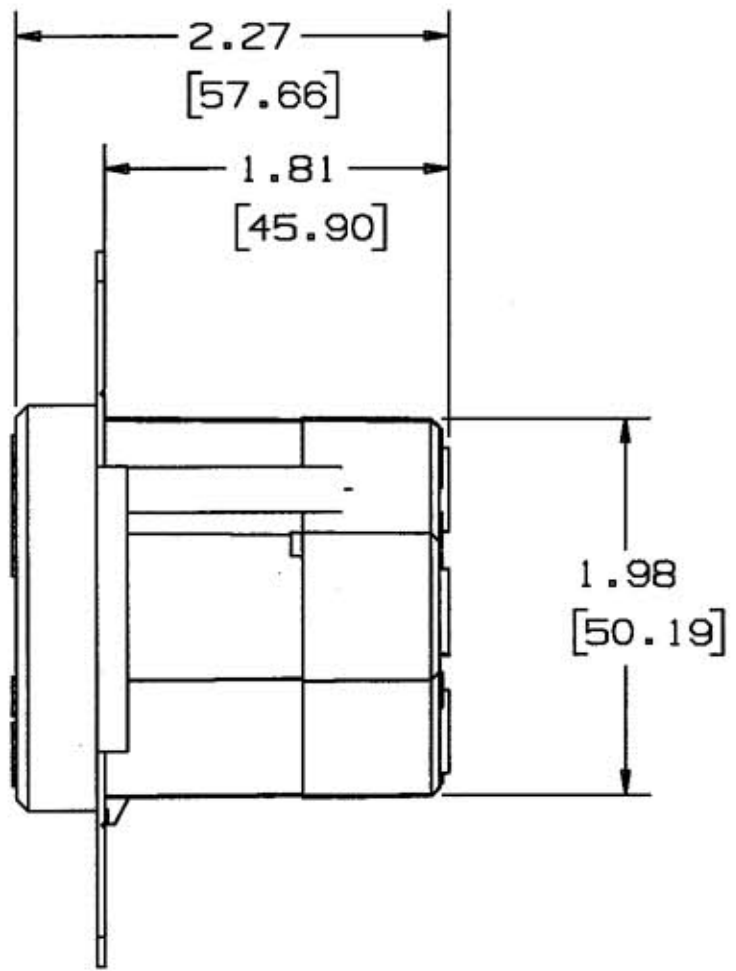


M-9919 1

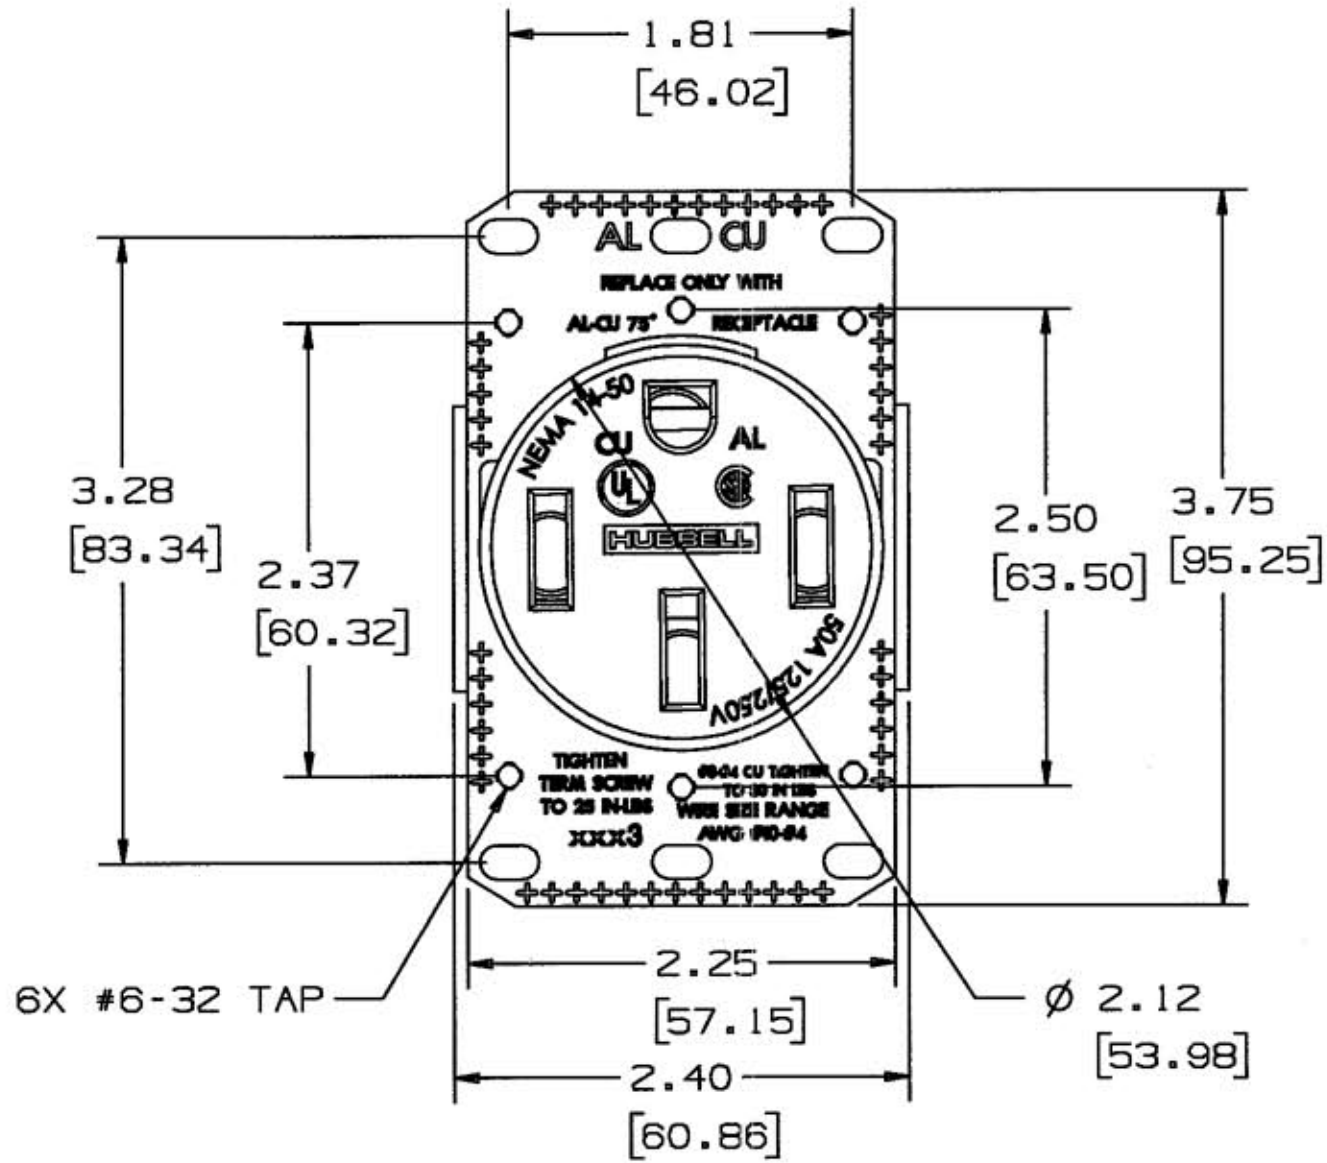

6X #6-32 TAP

- NOTES: (UNLESS OTHERWISE SPECIFIED)
1. FOR USE WITH ALUMINUM AND COPPER WIRE SOLID OR STRANDED.
 2. AWG WIRE RANGE: #4-#10
 3. DIM'S ARE IN INCHES [MM].
 4. (4) MOUNTING SCREWS - NOT SHOWN (SIZE #6-32UNC).

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
DRIVE SCREW	STEEL	ZINC
MOUNTING PLATE	STEEL	ZINC
WIRE TERMINAL	ALUMINUM	TIN
CONTACTS	BRASS	
RETAINER	PLASTIC	TIN
GROUND SHUNT	BRASS	
HOUSING	PLASTIC	
TERMINAL SCREW	STEEL	ZINC
MOUNTING SCREWS	STEEL	ZINC

SYMBOL	REVISIONS	APP	DATE
1	RELEASED PER EC# 13450		11/16/06

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
FLUSH MOUNT RECEPTACLE
NEMA 14-50R

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT.	
FRACTIONS ± 1/84	DR. BY MPF	APP. BY DMP
DECIMALS ± .005	TR. BY	SCALE 1/1
ANGLES ± 2°	CHK'D BY DMP	DATE 10/3/05

DIMENSION SHEET FOR CAT. NO. RR450F (BLACK) RR450FW (WHITE) REPAIRABLE NON-REPAIRABLE B M-9919 1