Uncontrolled Copy

028582

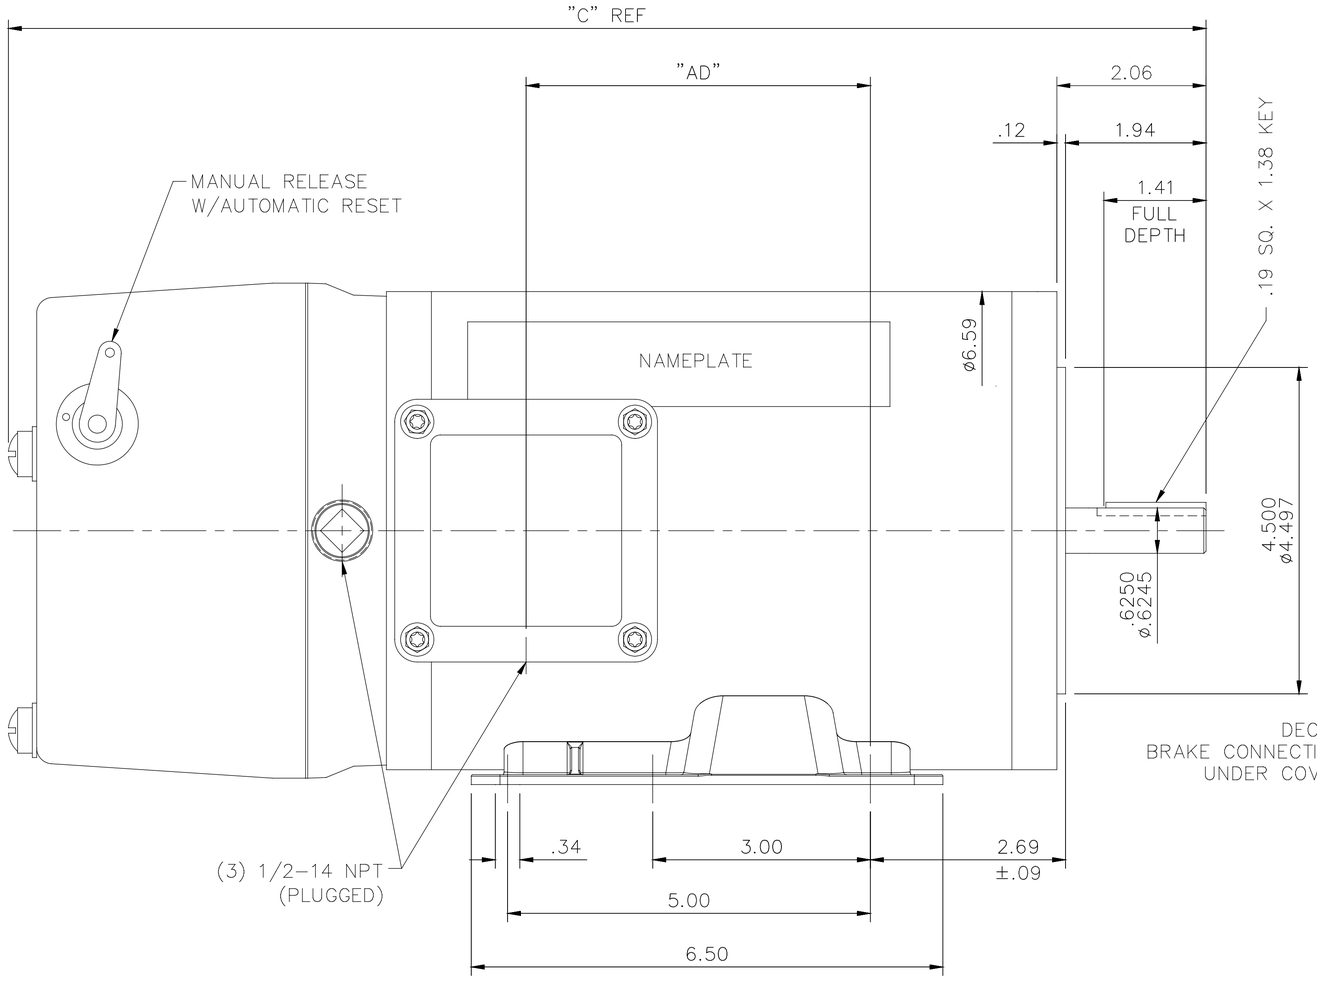

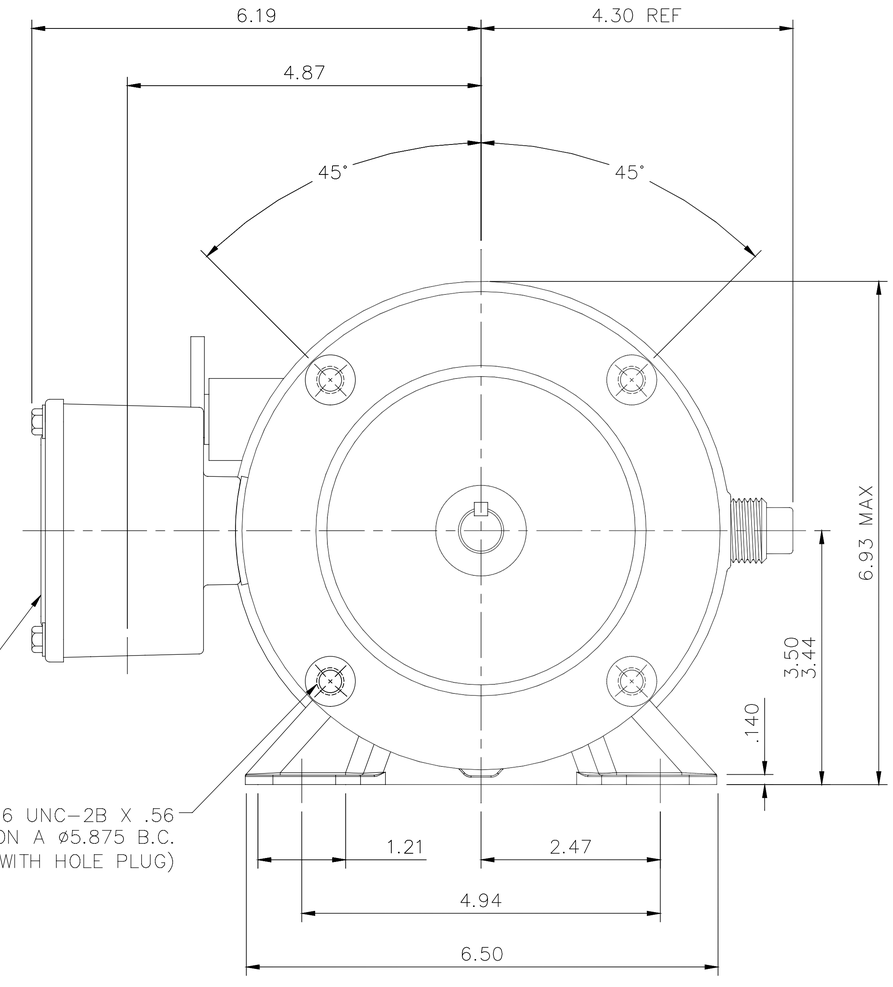

DASH NO.	"C"	"AD"
800	16.51	4.74
850	17.01	5.24
900	17.51	5.74

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

ALL–STAINLESS
VITON CONDUIT BOX & COVER GASKETS
VITON O–RINGS IN ENDBELL RABBETS, UNDER THRU BOLT HEADS & BRAKE LEAD HOLE
VITON SHAFT SEAL
BREATHER PLUG IN CONDUIT BOX
ALL STAINLESS STEEL CONSTRUCTION

ORACLE REV
02

NO.	REVISION	BY & DATE	CHK
D	REVISED BASE PER ECO–0090057	ARV 2/4/16	SK

TOLERANCES UNLESS SPECIFIED

DEC.	INCHES
.X	±.1
.XX	±.03
.XXX	±.005
.XXXX	±.0005
ANG	±1/2°

LEESON ELECTRIC MOTORS GEARMOTORS AND DRIVES

TITLE: OUTLINE – 56HC FRAME TENV – RIGID "C"

MAT'L. STAINLESS STEEL DUCK – BRAKE MOTOR

FINISH

DRAWN	RDW 4/22/04
CHK	
APPD	SW 4/22/04
SCALE	1=2
REF	PR010432
FMF	116483
PREV	

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT

RFP 4/22/04
DIST

CAD FILE 028582

SIZE B

DRAWING NO. 028582

REV. D