

Hub City™ Worm Gear Drives

Single Reduction

PowerCubeX® Worm Speed Reducer Catalog Ratings

Series 380

Series 380				CONVENTIONAL OIL					PAO SYNTHETIC OIL					PAG SYNTHETIC OIL		
SERIES	INPUT RPM	RATIO	OUTPUT RPM	MECH. INPUT HP	EFF. %	MECH. OUTPUT TORQUE	THERMAL INPUT HP	THERMAL OUTPUT TORQUE	MECH. INPUT HP	EFF. %	OUTPUT TORQUE	THERMAL INPUT HP	THERMAL OUTPUT TORQUE	INPUT HP	EFF. %	OUTPUT TORQUE
380	2500	5	500	22.9	91.7	2665	11.0	1272	22.9	94.5	2749	13.3	1590	22.9	97.5	2834
		10	250	14.4	88.2	3223	6.77	1506	14.4	90.8	3345	8.23	1883	14.4	93.8	3465
		15	167	10.2	85.0	3294	4.70	1511	10.2	87.6	3418	5.70	1889	10.2	90.4	3562
		20	125	8.52	83.2	3607	4.00	1679	8.52	85.7	3743	4.86	2099	8.52	88.4	3900
		30	83.3	5.72	77.6	3352	2.58	1516	5.72	79.9	3517	3.14	1895	5.72	82.5	3663
		40	62.5	4.83	74.7	3635	2.23	1679	4.83	76.9	3814	2.71	2100	4.83	79.4	3973
		50	50.0	3.86	71.5	3477	1.97	1777	3.86	73.6	3647	2.39	2221	3.86	76.0	3799
	60	41.7	3.17	68.2	3273	1.89	1945	3.17	70.2	3434	2.29	2431	3.17	72.5	3596	
	1750	5	350	20.0	89.9	3230	10.1	1631	20.0	92.7	3332	12.2	2039	20.0	95.6	3435
		10	175	12.6	86.5	3907	6.20	1931	12.6	89.7	4054	7.47	2414	12.6	93.0	4200
		15	117	8.87	83.3	3993	4.30	1937	8.87	86.5	4143	5.18	2422	8.87	90.1	4317
		20	87.5	7.44	81.6	4372	3.66	2153	7.44	84.7	4537	4.41	2691	7.44	88.2	4727
		30	58.3	5.00	75.4	4063	2.39	1943	5.00	79.1	4263	2.84	2429	5.00	82.4	4440
		40	43.8	4.22	72.5	4406	2.06	2153	4.22	76.0	4623	2.46	2691	4.22	79.2	4816
		50	35.0	3.37	69.4	4214	1.82	2278	3.37	72.9	4421	2.17	2847	3.37	75.9	4605
	60	29.2	2.77	66.2	3967	1.74	2493	2.77	69.5	4162	2.07	3117	2.77	72.8	4359	
	1170	5	234	16.5	89.0	4040	8.58	2093	16.5	91.9	4169	8.23	2617	16.5	94.7	4298
		10	117	10.3	85.1	4817	5.39	2512	10.3	88.3	4998	6.49	3140	10.3	91.5	5179
		15	78.0	7.44	81.6	4990	3.91	2622	7.44	84.7	5180	4.71	3278	7.44	88.2	5394
		20	58.5	6.27	79.6	5468	3.41	2975	6.27	82.6	5675	4.11	3719	6.27	86.0	5911
		30	39.0	4.24	72.6	5060	2.26	2694	4.24	76.1	5309	2.69	3367	4.24	79.3	5530
		40	29.3	3.61	69.3	5486	2.02	3060	3.61	72.7	5756	2.40	3825	3.61	75.7	5995
		50	23.4	2.90	65.9	5236	1.91	3444	2.90	69.1	5493	2.27	4305	2.90	72.0	5722
	60	19.5	2.38	62.4	4890	1.66	3408	2.38	65.5	5132	1.98	4260	2.38	68.6	5374	
	100	5	20.0	3.11	82.3	8065	THERMAL EQUALS MECHANICAL		3.11	85.0	8322	THERMAL EQUALS MECHANICAL		3.11	87.6	8580
		10	10.0	1.94	75.6	9260			1.94	78.5	9806			1.94	81.3	9957
		15	6.7	1.50	69.6	9790			1.50	72.2	10160			1.50	75.2	10580
		20	5.0	0.95	66.3	7962			0.95	68.8	8264			0.95	71.7	8608
		30	3.3	0.94	55.8	9905			0.94	58.6	10390			0.94	61.0	10820
		40	2.5	0.61	51.6	7990			0.61	54.1	8384			0.61	56.4	8734
		50	2.0	0.41	47.6	6100			0.41	49.9	6401			0.41	52.0	6667
		60	1.7	0.30	43.8	4890			0.30	45.9	5132			0.30	48.1	5374

ADDITIONAL RATINGS FOR OTHER INPUT SPEEDS ARE AVAILABLE AT WWW.REGALBELOIT.COM

OVERHUNG LOAD AND THRUST LOAD INFORMATION

OVERHUNG LOAD - LOW SPEED SHAFT —

MODELS 381 AND 384 1,600 LBS. AT CENTER POINT OF SHAFT EXTENSION.

MODELS 382 AND 385 NOT APPLICABLE.

MODELS 387 AND 388 — OHL * 1,970 LBS., TO* THRUST OUT 1,950 LBS. AND TI* THRUST IN 1,500 LBS.

THRUST* UP OR DOWN 1,500 LBS.

*OHL AND THRUST VALUES SHOWN ARE INDEPENDENT FUNCTIONS AND CANNOT BE APPLIED SIMULTANEOUSLY.


REFER APPLICATIONS WITH COMBINED OHL AND THRUST TO REGAL CUSTOMER SERVICE DEPARTMENT.

OUTPUT TORQUE VALUES SHOWN ARE INCH-POUNDS (IN-LB).

Hub City™ Worm Gear Drives

Single Reduction Models

136, 186, 216, 246, 266, 326, 386 (STEEL BRACKET)

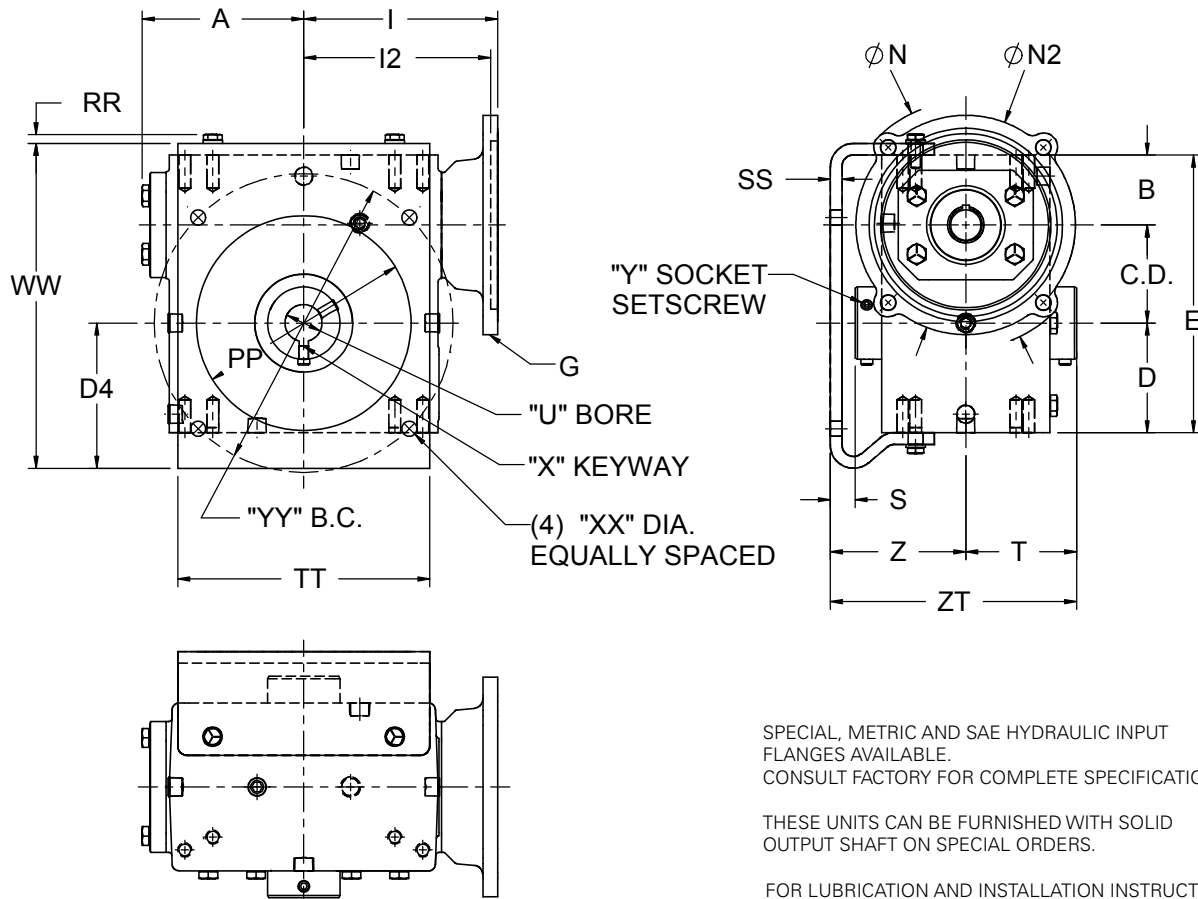


SPECIAL, METRIC AND SAE HYDRAULIC INPUT FLANGES AVAILABLE.
CONSULT FACTORY FOR COMPLETE SPECIFICATIONS.

THESE UNITS CAN BE FURNISHED WITH SOLID OUTPUT SHAFT ON SPECIAL ORDERS.

FOR LUBRICATION AND INSTALLATION INSTRUCTIONS - REFER TO SECTION M

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.
DOWNLOAD AVAILABLE CAD MODELS AT: WWW.HUBCITYINC.COM

Standard Styles Available

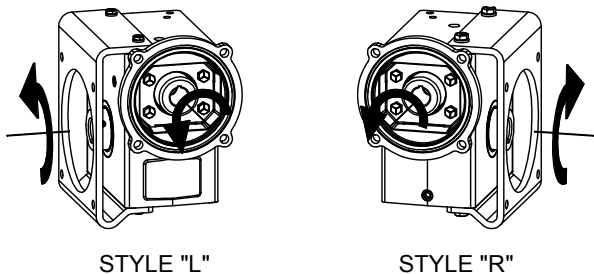

CONSULT FACTORY FOR VERTICAL SHAFT LUBRICATION RECOMMENDATIONS.
INPUT SHAFT CAN BE ROTATED IN EITHER DIRECTION.

Hub City™ Worm Gear Drives

Single Reduction Models

136, 186, 216, 246, 266, 326, 386 (STEEL BRACKET)

MODEL	C.D.	A	B	D	E	G	I	I2	N	N2
136	1.334	2.61	1.186	1.562	4.082	48CZ	3.46	N/A	4.36	3.87
						56C			6.63	6.50
186	1.751	3.23	1.374	1.875	5.000	48CZ	4.09	N/A	4.36	3.87
						56C			6.63	6.50
						143TC			6.63	6.50
216	2.064	3.61	1.500	2.437	6.000	48CZ	4.46	N/A	4.36	3.87
						56C			6.63	6.50
						143TC			6.63	6.50
246 *	2.376	3.77	2.061	2.500	6.937	56C	4.63	N/A	6.50	6.50
						143TC			6.50	6.50
						182TC			9.00	9.00
266	2.626	4.33	1.874	2.938	7.438	56C	5.19	N/A	6.50	6.50
						143TC			6.50	6.50
						182TC			9.00	9.00
326	3.251	5.28	2.124	3.250	8.625	56C	6.14	N/A	6.50	6.50
						143TC			6.50	6.50
						182TC			9.00	9.00
						213TC			9.00	9.00
386	3.751	4.90	2.374	3.937	10.062	56C	6.50	N/A	6.50	6.50
						143TC			6.50	6.50
						182TC			9.00	9.00

* Model 246 also available with cast F-flange as either an add-on kit (see page B-103) or as a special assembly (consult factory).

MODEL	G	D4	PP	RR	SS	TT	WW	XX	YY	Wt. Lbs.
136	48CZ	2,50	3,62	0,22	0,19	4,25	5,22	11/32	5,000	18
	56C									
186	48CZ	3,13	4,25	0,22	0,25	4,88	6,50	11/32	5,875	18
	56C									
	143TC									
216	48CZ	3,75	4,75	0,33	0,31	5,75	7,63	13/32	7,000	29
	56C									
	143TC									
246	56C	3,61	5,00	0,33	0,25	6,00	8,30	13/32	7,500	43
	143TC									
	182TC									
266	56C	3,89	5,75	0,33	0,31	6,50	8,70	13/32	8,000	43
	143TC									
	182TC									
326	56C	4,45	6,88	0,44	0,31	7,50	10,14	13/32	9,000	74
	143TC									
	182TC									
	213TC									
386	56C	5,09	7,50	0,44	0,31	8,25	11,53	9/16	10,000	92
	143TC									
	182TC									

Stock Output Bores

MINIMUM AND MAXIMUM BORE DIMENSIONS SHOWN.FOR ADDITIONAL STOCK OUTPUT BORE SIZES AVAILABLE SEE PAGE B-96.

MODEL	G	U (MIN.)	U (MAX.)	S	T	Z	ZT
136	48CZ	N/A	5/8	0,75	2,25	3,00	5,25
	56C						
186	48CZ	15/16	1	0,91	2,41	3,31	5,71
	56C						
	143TC						
216	48CZ	15/16	1-1/2	0,85	2,78	3,63	6,41
	56C						
	143TC						
246	56C	1	1-1/2	0,75	2,97	3,72	6,69
	143TC						
	182TC						
266	56C	1	1-1/2	0,66	2,97	3,62	6,59
	143TC						
	182TC						
326	56C	1-7/16	2-3/16	0,22	3,78	4,00	7,78
	143TC						
	182TC						
	213TC						
386	56C	1-7/16	2-3/16	0,72	3,78	4,50	8,28
	143TC						
	182TC						



Select hollow output bore models in this product line are now available with the HubLoc® keyless bushing system. Refer to pages i and ii at front of this catalog for features, available sizes, and ordering information.

EMAIL: hubsales@regalbeloit.com • www.regalbeloit.com

