

Hub City™ CleanLine™ Gear Drives

Stainless Steel Ratio Multipliers


Model SSRM1 - Single Reduction

Features

- 316 stainless steel housing and 303 stainless steel shafts
- Smooth cast surface finish
- Ratios up to 7.462/1
- Factory filled with USDA H1 lubricant for application service life of the drive
- Configured for severe high pressure & chemical washdown environments
- BISSC certified and HACCP compatible
- Packaged with Marathon® POWERWASH SXT all-stainless motors
- Ideal for use between a stainless steel motor and a C-face stainless steel gear drive to gain needed additional gear reduction.



Model Nomenclature Example

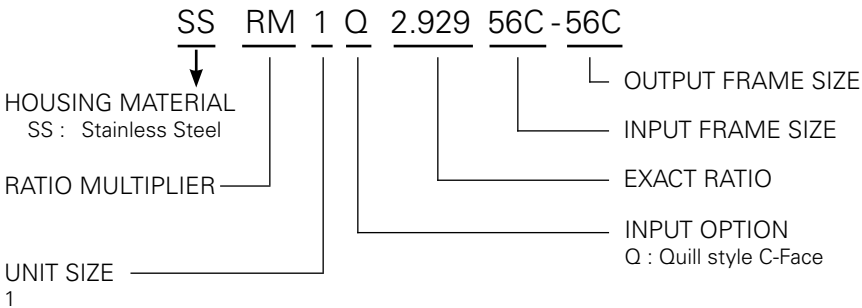

FOR LUBRICATION AND INSTALLATION INSTRUCTIONS REFER TO SECTION M.

DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

DOWNLOAD AVAILABLE CAD MODELS AT: WWW.HUBCITYINC.COM

SSRM1 RATINGS @ 1750 RPM INPUT

RATIO	OUTPUT RPM	INPUT HP	OUTPUT TORQUE	MAX LS OHL
2.056	851	4.69	347	222
2.929	598	3.64	384	265
4.000	438	2.91	419	300
5.111	342	2.33	428	300
7.462	235	1.56	419	300

WEIGHT (LBS.) - 20

SSRM1 INPUT	IB	IK
56C	0.625	3/16 X 3/32
140TC	0.875	3/16 X 3/32

SSRM1 OUTPUT	T	OK
56C	0.625	3/16 X 3/32
140TC	0.875	3/16 X 3/32

