




ISOSTATIC
LEADERS IN BRONZE BEARINGS...and MORE

Isostatic Industries, Inc.
4153 North Kostner Avenue
Chicago, IL 60641
Toll Free: 800.621.5500
Phone: 773.286.3444
Fax: 773.282.3323
Email: info@isostatic.com

Item # 701081, TU® Steel-Backed PTFE Lined Sleeve Bearings - METRIC

Isostatic TU® Sleeve Bearings

- Standard stock products
- Self-lubricating dry sliding bearing
- A steel-backed composite material comprised of:
 - Low carbon steel backing for extremely high load capacity-.50 – 2.7mm thick
 - Sintered bronze offers optimal heat dispersion –.20 - .35 mm thickness and
 - PTFE – lead sliding surface creates a low friction coefficient and allows for a wide temperature range – thickness .2 mm
- Can be used where many liquid lubricants fail; also performs well with lubrication

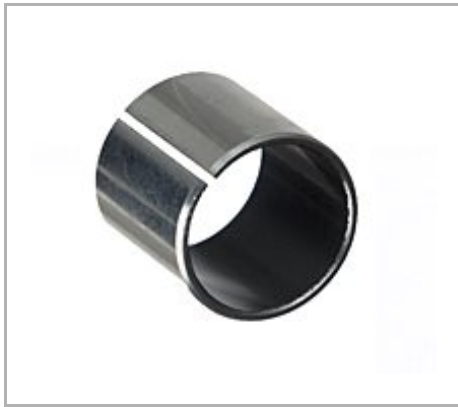

[+ more](#)

[Description](#) | [Specifications](#) | [Dimensions](#) | [Tolerances](#) | [Performance Data](#)

Description

Detailed Description

25 MM I.D. x 28 MM O.D. x 25 MM Length, TU, Steel Back, PTFE & Pb Lined Composite, Sleeve Bearing, Metric

Specifications

Catalog Number	M2525TU
Interchange #	2525DU MB2525DU PAP 2525 P10
Unit of Measure	Each
Material	Steel-Backed PTFE Lined

Material Standard	Steel-Backed PTFE Lined
--------------------------	-------------------------

Avg Unit Weight	0.0510 lb
------------------------	-----------

UPC Code	00846802068486
-----------------	----------------

Dimensions

Nominal Inner Diameter	25 mm
-------------------------------	-------

Nominal Outer Diameter	28 mm
-------------------------------	-------

Nominal Length	25 mm
-----------------------	-------

Recommended Shaft Size	24.959 to 24.980 mm
-------------------------------	---------------------

Recommended Housing Bore	28.000 to 28.021 mm
---------------------------------	---------------------

Tolerances

Overall Length Tolerance	± 0.25 mm
---------------------------------	---------------

Performance Data

Load - P Max Value	36,250 lb/in ²
---------------------------	---------------------------

Speed - V Max Value	1,900 ft ² /min
----------------------------	----------------------------

Load at Speed - PV Max Value (P.S.I. / S.F.M.)	102,000
---	---------