

# MECHANICAL CONNECTORS

## Aluminum Dual Rated Transformer Lugs

### T, L SERIES



### FEATURES

- Versatile and reusable set-screw connectors made from high strength 6061-T6 aluminum alloy for superior electrical and mechanical performance.
- Two set-screws per wire hole ensure an exceptional connection.
- Electro-tin plated for low contact resistance. For use with copper or aluminum conductors.
- Mounting hole spacing is NEMA 1 $\frac{3}{4}$ ".
- Also available with the following options: clear plating, anodized set-screws or disc pad screws – contact NSi Customer Service for ordering details.

### RATINGS

Meets or exceeds ANSI C119.4 Class A .

#### TEMPERATURE RATING:


90 °C.

#### VOLTAGE:

600V max.

All dimensional data is listed in inches.

CAT. NO.	FIG. NO.	WIRE RANGE
<b>2-350T2</b>	1	350 MCM-6 AWG
<b>3-350T2</b>	2	350 MCM-6 AWG
<b>4-350T3</b>	3	350 MCM-6 AWG
<b>6-350T4</b>	4	350 MCM-6 AWG
<b>8-350T4</b>	5	350 MCM-6 AWG
<b>2-350L4</b>	6	350 MCM-6 AWG
<b>3-350L4</b>	7	350 MCM-6 AWG
<b>4-350L6</b>	8	350 MCM-6 AWG
<b>6-350L8</b>	9	350 MCM-6 AWG
<b>8-350L8</b>	10	350 MCM-6 AWG
<b>2-600L4</b>	6	600 MCM-2 AWG
<b>3-600L4</b>	7	600 MCM-2 AWG
<b>4-600L6</b>	8	600 MCM-2 AWG
<b>6-600L8</b>	9	600 MCM-2 AWG

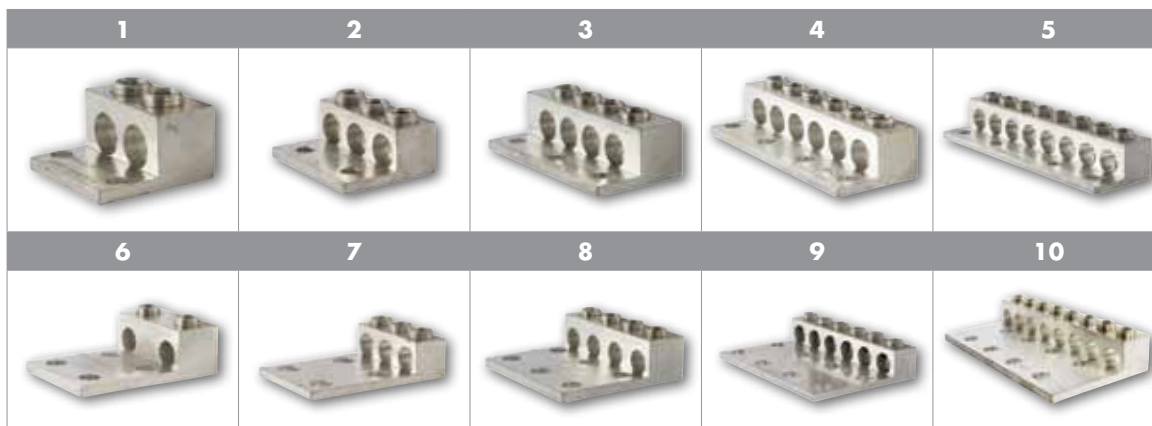



NO. OF CONDUCTORS	NO. OF MTG. HOLES	MTG. HOLE DIA.	MTG. HOLE SPACING	WRENCH SIZE	MTG. BOLT SIZE	LENGTH (L) (IN.)	WIDTH (W) (IN.)	HEIGHT (H) (IN.)	STD. PKG. QTY.
2	2	0.375	1.750	3/8"	5/16"	2.250	1.940	1.250	1
3	2	0.375	1.750	3/8"	5/16"	2.250	2.840	1.250	1
4	3	0.375	1.750	3/8"	5/16"	2.250	3.750	1.250	1
6	4	0.375	1.750	3/8"	5/16"	2.250	4.660	1.250	1
8	4	0.375	1.750	3/8"	5/16"	2.250	5.560	1.250	1
2	4	0.563	1.750	3/8"	1/2"	4.310	2.000	1.380	1
3	4	0.563	1.750	3/8"	1/2"	4.310	2.940	1.380	1
4	6	0.563	1.750	3/8"	1/2"	4.310	3.870	1.380	1
6	8	0.563	1.750	3/8"	1/2"	4.310	5.750	1.380	1
8	8	0.563	1.750	3/8"	1/2"	4.310	7.620	1.380	1
2	4	0.563	1.750	3/8"	1/2"	4.500	2.410	1.630	1
3	4	0.563	1.750	3/8"	1/2"	4.500	3.590	1.630	1
4	6	0.563	1.750	3/8"	1/2"	4.500	4.780	1.630	1
6	8	0.563	1.750	3/8"	1/2"	4.500	7.160	1.630	1