

# CONNECTORS

## Compression Connectors

### Dual Rated Insulated Service Entrance Sleeves

#### ISE Series




#### SPECIFICATIONS

- Meets or exceeds ANSI C119.4.
- Voltage: 600V max.
- Max ampacity is based on NEC 310.15, insulation type, and conductor material. Please consult your current NEC manual..

#### FEATURES

- Pre-insulated service entrance compression sleeves for fast and easy installation with standard tools and dies.
- For combinations of aluminum-aluminum and aluminum-copper conductors.
- Solid center barrier.

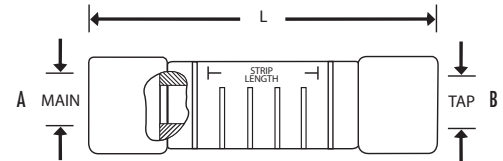

CAT. NO.	DIE SIZE (IN.)	TOOL	A - CONDUCTOR RANGE			B - CONDUCTOR RANGE			LENGTH (L) (IN.)	STD. CTN. QTY.
			ACSR	AWG (*COMPACT)	COLOR CODE	ACSR	AWG	COLOR CODE		
ISE61	5/8	OD581	—	8 STR-6 SOL	Green	—	8 STR-6 SOL	Green	2.780	50
ISE62	5/8	OD581	6	6 STR-4 SOL	Blue	—	10 STR-8 SOL	Brown	2.780	50
ISE63	5/8	OD581	6	6 STR-4 SOL	Blue	—	8 STR-6 SOL	Green	2.780	50
ISE64	5/8	OD581	6	6 STR-4 SOL	Blue	6	6 STR-4 SOL	Blue	2.780	50
ISE65	5/8	OD581	4	3-4 STR-2 SOL	Orange	—	10 STR-8 SOL	Brown	2.780	50
ISE66	5/8	OD581	4	3-4 STR-2 SOL	Orange	—	8 STR-6 SOL	Green	2.780	50
ISE67	5/8	OD581	4	3-4 STR-2 SOL	Orange	6	6 STR-4 SOL	Blue	2.780	50
ISE68	5/8	OD581	4	3-4 STR-2 SOL	Orange	4	3-4 STR-2 SOL	Orange	2.780	50
ISE71	5/8	OD581	2	1-2 STR	Red	6	6 STR-4 SOL	Blue	2.780	50
ISE72	5/8	OD581	2	1-2 STR	Red	4	3-4 STR-2 SOL	Orange	2.780	50
ISE73	5/8	OD581	2	1-2 STR	Red	2	1-2 STR	Red	2.780	50
ISE76	5/8	OD581	1/0	1/0	Yellow	4	3-4 STR-2 SOL	Orange	2.780	50
ISE77	5/8	OD581	1/0	1/0	Yellow	2	1-2 STR	Red	2.780	50
ISE78	5/8	OD581	1/0	1/0	Yellow	—	1/0 STR	Yellow	2.780	50
ISE135	0.840	OD581+BY377C	1/0	1/0, 2/0 STR*	Yellow	2	1-2 STR	Red	5.500	12
ISE136	0.840	OD581+BY377C	1/0	1/0, 2/0 STR*	Yellow	1/0	1/0 STR, 2/0 COM	Yellow	5.500	12
ISE144	0.840	OD581+BY377C	2/0	2/0, 3/0 STR*	Gray	4	3-4 STR-2 SOL	Orange	5.500	12
ISE145	0.840	OD581+BY377C	2/0	2/0, 3/0 STR*	Gray	2	1-2 STR	Red	5.500	12
ISE146	0.840	OD581+BY377C	2/0	2/0, 3/0 STR*	Gray	1/0	1/0 STR, 2/0 COM	Yellow	5.500	12
ISE147	0.840	OD581+BY377C	2/0	2/0, 3/0 STR*	Gray	2/0	2/0 STR, 3/0 COM	Gray	5.500	12
ISE154	0.840	OD581+BY377C	3/0	3/0, 4/0 STR*	Black	4	3-4 STR, 2 SOL	Orange	5.500	12
ISE155	0.840	OD581+BY377C	3/0	3/0, 4/0 STR*	Black	2	1-2 STR	Red	5.500	12
ISE156	0.840	OD581+BY377C	3/0	3/0, 4/0 STR*	Black	1/0	1/0 STR, 2/0 COM	Yellow	5.500	12
ISE158	0.840	OD581+BY377C	3/0	3/0, 4/0 STR*	Black	3/0	3/0 STR, 4/0 COM	Black	5.500	12
ISE164	0.840	OD581+BY377C	4/0	4/0 STR	Pink	4	3-4 STR-2 SOL	Orange	5.500	12
ISE165	0.840	OD581+BY377C	4/0	4/0 STR	Pink	2	1-2 STR	Red	5.500	12
ISE167	0.840	OD581+BY377C	4/0	4/0 STR	Pink	2/0	2/0 STR, 3/0 COM	Gray	5.500	12
ISE168	0.840	OD581+BY377C	4/0	4/0 STR	Pink	3/0	3/0 STR, 4/0 COM	Black	5.500	12
ISE169	0.840	OD581+BY377C	4/0	4/0 STR	Pink	4/0	4/0 STR	Pink	5.500	12