

Weight: 0.8 lbs

Type:

Date:

Ballast Info

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	N/A

Suitable for wet locations

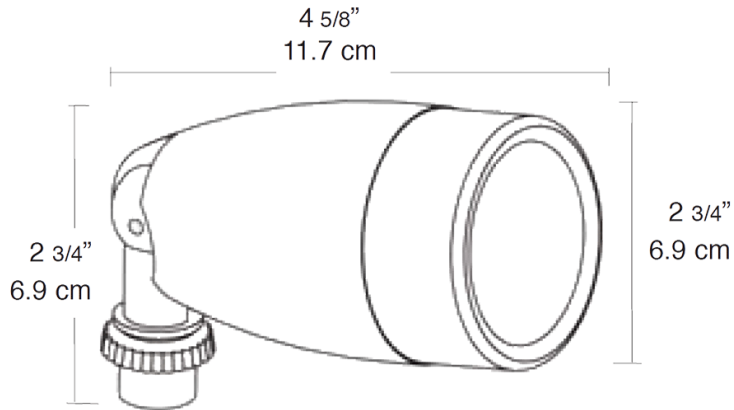
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Porcelain with all copper current carrying components and spring loaded center contact

Fully adjustable with sure-grip locknuts. 1/2" NPS threaded arm with locking swivel fits all standard mounting covers.

Precision die-cast aluminum. Tuffy flood is molded plastic.

PAR38 or PAR20, 150 watt max. lamp not supplied.

Dimensions**Features**

- Molded, high temperature silicone gasket
- EZ Grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver
- Rugged heavy sand die cast aluminum housing with durable powder coating
- Sockets have all copper current carrying components
- Fully adjustable swivel with sure-grip locks
- Mounting arms have $\frac{1}{2}"$ threads