



Premium PAR38 Flood with large, molded high temperature black silicone gasket that totally seals lamp. Die cast aluminum housing. EZ Locknut. Suitable for mounting within 4' of the ground. PAR38 or PAR20, 150 Watt max. Lamp not supplied.

Color: Verde green Weight: 0.8 lbs

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Lamp Info   |       | Ballast Info |     |
|-------------|-------|--------------|-----|
| Type        | PAR20 | Type         | N/A |
| Watts       | 150W  | 120V         | N/A |
| Shape/Size  | N/A   | 208V         | N/A |
| Base        | N/A   | 240V         | N/A |
| ANSI        | N/A   | 277V         | N/A |
| Hours       | 2,500 | Input Watts  | N/A |
| Lamp Lumens | N/A   |              |     |
| Efficacy    | N/A   |              |     |

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

Sockets:

Porcelain with all copper current carrying components and spring loaded center contact

Construction

Swivels:

Fully adjustable with sure-grip locknuts. 1/2" NPS threaded arm with locking swivel fits all standard mounting covers.

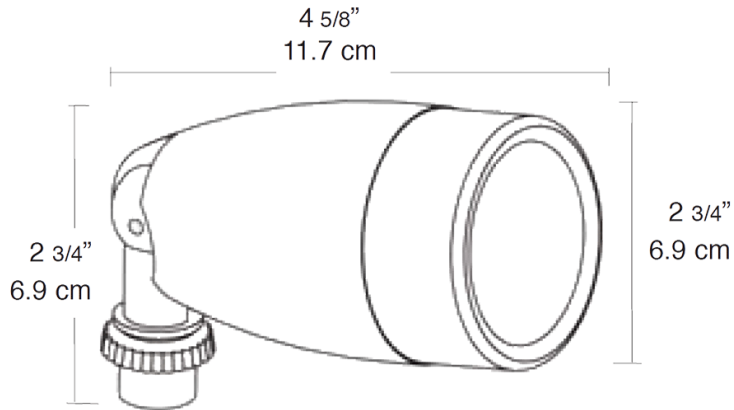
Housings:

Precision die-cast aluminum. Tuffy flood is molded plastic.

Optical

Lamp:

PAR38 or PAR20, 150 watt max. lamp not supplied.

**Dimensions****Features**

- Molded, high temperature silicone gasket
- EZ Grip locknut matches fixture finish and can be adjusted with fingers, pliers or a screwdriver
- Rugged heavy sand die cast aluminum housing with durable powder coating
- Sockets have all copper current carrying components
- Fully adjustable swivel with sure-grip locks
- Mounting arms have 1/2" threads