

Weight: 7.1 lbs

Type:

Date:

LED Info

Type	Constant Current	Watts	26W
120V	0.26A	Color Temp	5000K (Cool)
208V	0.16A	Color Accuracy	69 CRI
240V	0.14A	L70 Lifespan	100,000 Hours
277V	0.12A	Lumens	3,087 lm
Input Watts	30.2W	Efficacy	102.2 lm/W

Suitable for damp locations

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Equivalent to 42W CFL or 70W Metal Halide

3 mounting stems included. 6", 12" and 18" can be combined to achieve a maximum length of 36". 42" of wire supplied. The pendants thread into a hang-straight, leveling the fixture. Pendant outside diameter is 3/4". Threads are 1/4". Circular canopy included.

The LED will deliver 70% of its initial lumens at 100,000 hours of operation

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

LED color temperature is warranted to shift no more than 200K in color temperature over a 5-year period

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Precision die-cast aluminum housing, lens frame

Formulated for high durability and long-lasting color

Mercury and UV free. RoHS-compliant components.

The minimum starting temperature is -40°C (-40°F)

Suitable for use in up to 40°C (104°F)


The design of the PLED is protected by U.S. Pat. D608,040, D615,689 and patents pending in Canada, China and Taiwan.

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Multi-chip 2x13W high output long life LED Driver
Constant Current, Class 2 100V - 277V, 50/60 Hz

4kV

Dimensions

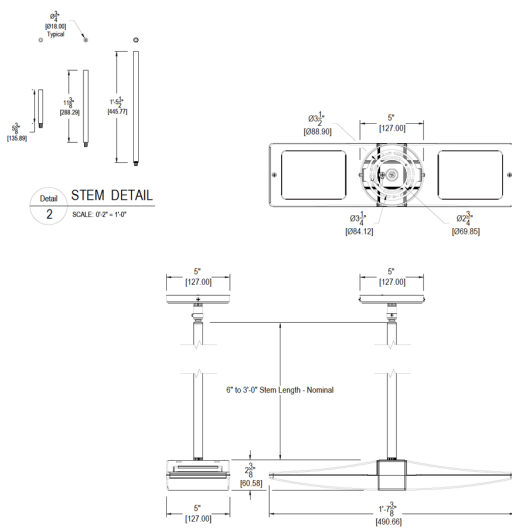

Features

- Die cast aluminum lens frame with tempered glass and double gasketing
- Fully Shielded, Full Cutoff Optics
- LED Light Engine life delivers 70% of rated lumens at 100,000-hours