



Pendant mount, die cast aluminum construction. Medium base socket, 1/2" or 3/4" NPS pendant thread and a variety of globes. Incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Black Weight: 2.4 lbs

|              |       |
|--------------|-------|
| Project:     | Type: |
| Prepared By: | Date: |

| Lamp Info   |      | Ballast Info |     |
|-------------|------|--------------|-----|
| Type        | A19  | Type         | N/A |
| Watts       | 150W | 120V         | N/A |
| Shape/Size  | N/A  | 208V         | N/A |
| Base        | N/A  | 240V         | N/A |
| ANSI        | N/A  | 277V         | N/A |
| Hours       | N/A  | Input Watts  | N/A |
| Lamp Lumens | N/A  |              |     |
| Efficacy    | N/A  |              |     |

Technical Specifications

Compliance

**UL Listed:**  
Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Construction

**Globes:**  
Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permaglobes available in clear and in color.


**Die Cast Guard:**  
Supplied with one piece black die cast guard with set screw

Electrical

**Maximum Watts:**  
150W

**Colored Globe Maximum Watts:**  
100W

Dimensions

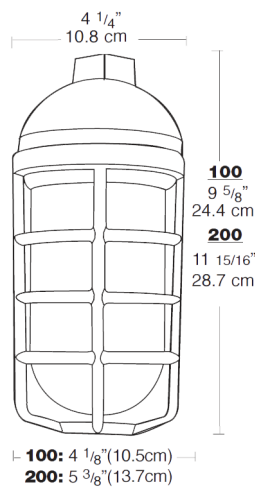

Features

- All stainless steel hardware
- Close-up plugs allow Phillips or slotted screwdrivers for easy installation
- Junction box with sturdy mounting lugs
- UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations
- High temperature silicone internal gaskets
- Premium porcelain socket with 150C 8" long leads