

1/4"-20 UNC GROUNDING PROVISIONS

4 x 1/2"-13 UNC

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.375" x 0.375" x 2.88"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

**250TC TEFC ROUND BODY FRAME
F1 ASSEMBLY**

MDSL285-04

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

TOLERANCES

| | |
|-------|-------|
| .X | .1 |
| .XX | .03 |
| .XXX | .005 |
| .XXXX | .0005 |

MAXIMUM MOTOR WEIGHT

340 lbs.
154 kgs.

| NO | REVISION | DRAWN BY | DATE | CHECK |
|----|--|-----------|----------|-------|
| 1 | ADDED KEY DIMENSIONS (OVERRIDE 'U' DIM.) | S. CLANCY | 08/08/12 | JR |
| 0 | FIRST ISSUE | N. MOMIN | 07/25/11 | JR |
| NO | | | | |



DRAWN BY: N. MOMIN
 CHECK BY: J. RUSSELL
 APPROVED BY: _____
 www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: 0152XDSC44A-P

| | | | | | | | | |
|-----------|----|------------|--------|-------|----------------|-------------|----------|--------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 15 | 11 | 2 | 3530 | 254TC | 575 | 60 | 3 | 15 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 56 | F | 1.15 | CONT | 91 | B | G | 40 C |

| | | | | | |
|--------------|-------|------|---------|----------------|------------------|
| Load | HP | kW | Amperes | Efficiency (%) | Power Factor (%) |
| Full Load | 15 | 11.2 | 14.4 | 91.4 | 86.7 |
| ¾ Load | 11.25 | 8.4 | 11.0 | 90.4 | 84.5 |
| ½ Load | 7.50 | 5.6 | 8.2 | 87.7 | 78.5 |
| ¼ Load | 3.75 | 2.8 | 5.9 | 79.7 | 59.2 |
| No Load | | | 4.4 | | 9.2 |
| Locked Rotor | | | 92.00 | | 40.5 |

| | | | | |
|----------------------|-------------------------|--------------------|-----------------------|---|
| Torque | | | | Rotor wk ² Inertia (lb-ft ²) |
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) | |
| 22.3 | 235 | 195 | 275 | 1.19 |

| | | | | | |
|--------------------|-----|------------------------------|-----------|--------|-------------------------------|
| Safe Stall Time(s) | | Sound Pressure dB(A) @ 1M | Bearings* | | Approx. Motor Weight (lbs) |
| Cold | Hot | | DE | NDE | |
| 35 | 15 | - | 6309C3 | 6309C3 | |

*Bearings are the only recommended spare part(s).

Motor Options:
Mounting:C-Face Round,Shaft:T Shaft

| | |
|-------------|--|
| Customer | |
| Customer PO | |
| Sales Order | |
| Project # | |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | garce | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date | 8/21/2015 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

SPEED TORQUE/CURRENT CURVE

Model: 0152XDSC44A-P

| | | | | | | | | |
|-------------------|---|-------------------|------------------|-------------|----------------|-------------|----------|----------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 15 | 11 | 2 | 3530 | 254TC | 575 | 60 | 3 | 15 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 56 | F | 1.15 | CONT | 91 | B | G | 40 C |
| Locked Rotor Amps | Rotor wk ² Inertia (lb-ft ²) | Torque | | | | | | Break Down (%) |
| | | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) | | | | |
| 92.00 | 1.19 | 22.3 | 235 | 195 | | | 275 | |

Design Values

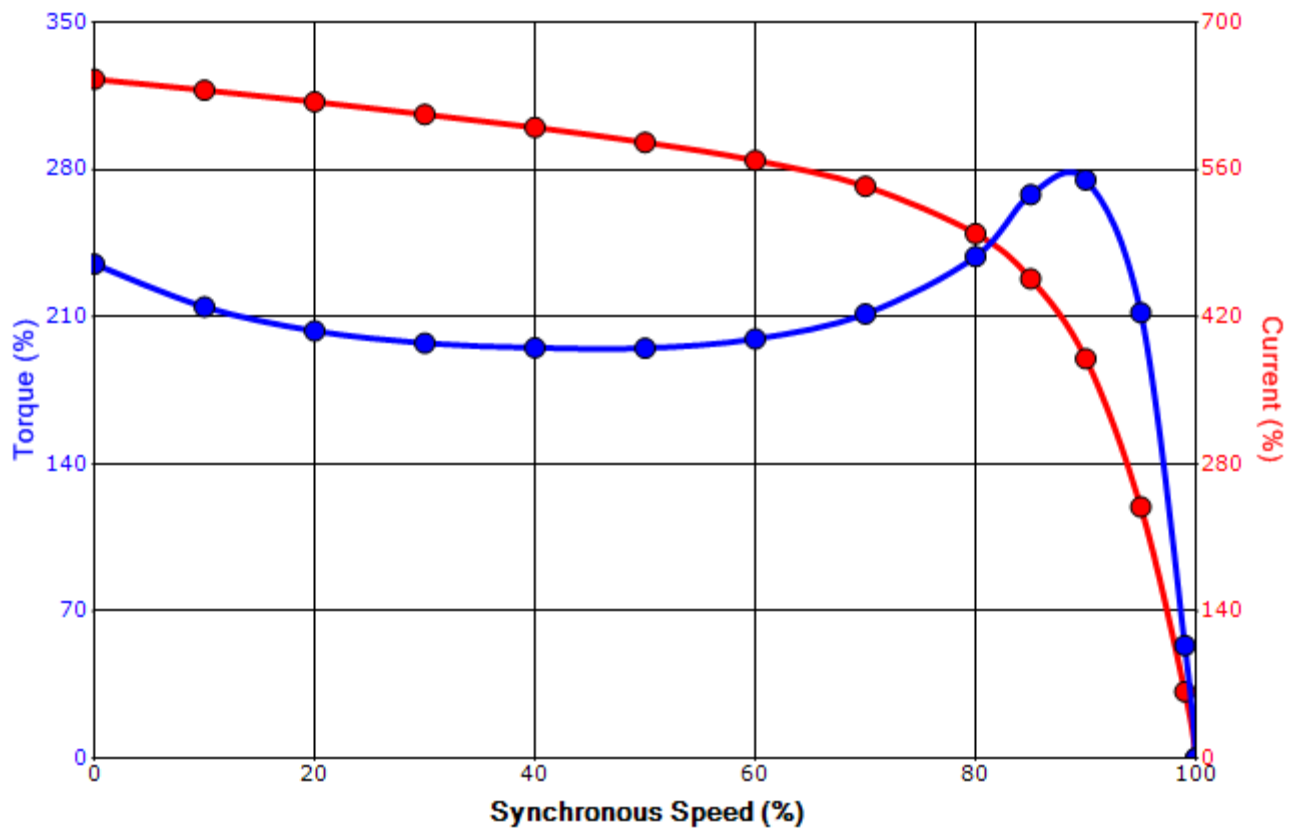

| | | | |
|-------------|--|--|-----|
| Customer | | wk ² Load Inertia (lb-ft ²) | - |
| Customer PO | | Load Type | - |
| Sales Order | | Voltage (%) | 100 |
| Project # | | Accel. Time | - |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | garce | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date | 8/21/2015 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

Motor Connection Diagram 3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.