

CROSSED ROLLER BEARINGS

- High Rigidity Type Crossed Roller Bearings V
- Mounting Holed Type High Rigidity Crossed Roller Bearings V
- Standard Type Crossed Roller Bearings
- Super Slim Type Crossed Roller Bearings
- Mounting Holed Type Super Slim Crossed Roller Bearings
- Slim Type Crossed Roller Bearings




Structure and Features

IKO Crossed Roller Bearings are compact bearings with their rollers alternately crossed at right angles to each other between inner and outer rings. They can take loads from any directions at the same time such as radial, thrust and moment loads. The rollers make line-contact with raceway surfaces, and, therefore, elastic deformation due to bearing loads is very small. These bearings are widely used in the rotating parts of industrial robots, machine tools, medical equipment, etc., which require compactness, high rigidity and high rotational accuracy.

In addition, bearings made of stainless steel or those with inner and outer rings provided with mounting holes are also available on request. Please contact IKO.

Structure of Crossed Roller Bearings

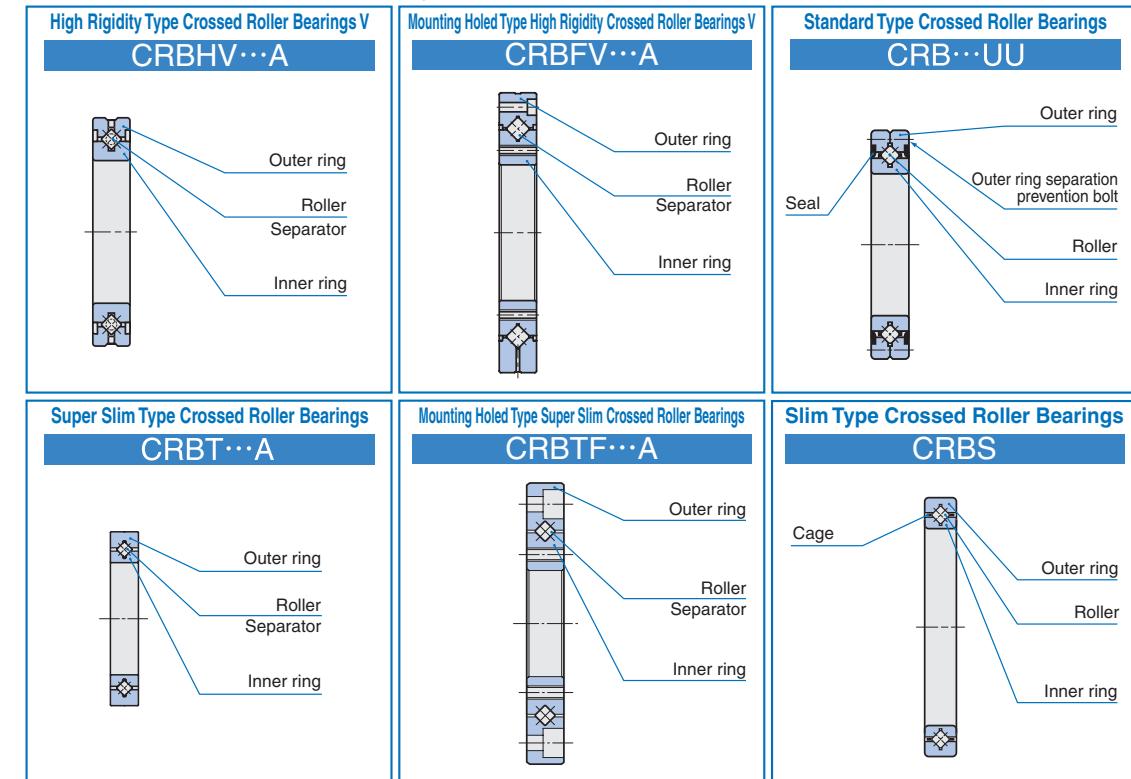


LCL Crossed Roller Bearings

Neither grease nor oil

World's first Liquid Crystal Lubricant

Liquid Crystal Lubricants are completely different from greases composed of base oils and thickeners. These are composed only of liquid crystal compounds, forming a new type of lubricant never seen before. Conventional grease base oils lubricate using dissimilar molecules, causing difficulties with adhesion to metal surfaces and evaporation. Liquid Crystal Lubricant forms molecular aggregates, improving adhesion to metal surfaces and minimizing evaporation. The Liquid Crystal Lubricant used in LCL Crossed Roller Bearings is the world's first Liquid Crystal Lubricant for bearings, achieving excellent lubrication functionality even under high contact pressure during rolling contact and succeeding in creating revolutionary new functions.

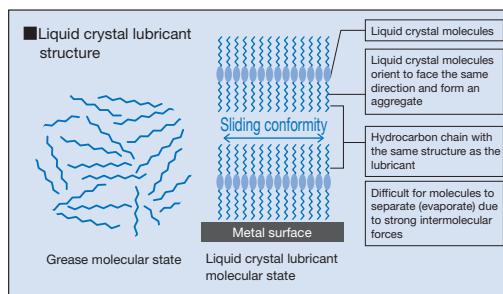

LCL Crossed Roller Bearings are individually made to order.
If needed, please contact IKO.

Features of LCL Crossed Roller Bearings

Superior load durability

Long-term durability exceeds 7 times that of fluorine grease at room temperature and atmospheric pressure.

Excellent outgas properties

The outgassing characteristics in high vacuum environments show excellent performance even at high temperatures.

Minimizes lubricant evaporation

There is zero mass loss even at 100°C. Liquid Crystal Lubricants have no loss due to evaporation.

Low rotational torque


The rotational torque is lower than that of fluorine grease or lithium soap-based grease.

Internal Structures and Shapes

Various types are lined up in Crossed Roller Bearing series, including the type with cage, the type with separator, open type, sealed type, etc.

Roller guide method

Crossed Roller Bearings include the type with cage, type with separator and full complement type. The type with cage and the type with separator have a small coefficient of friction and are suitable for comparatively high speed rotations, while the full complement type is suitable for heavy load applications at low speed rotations.

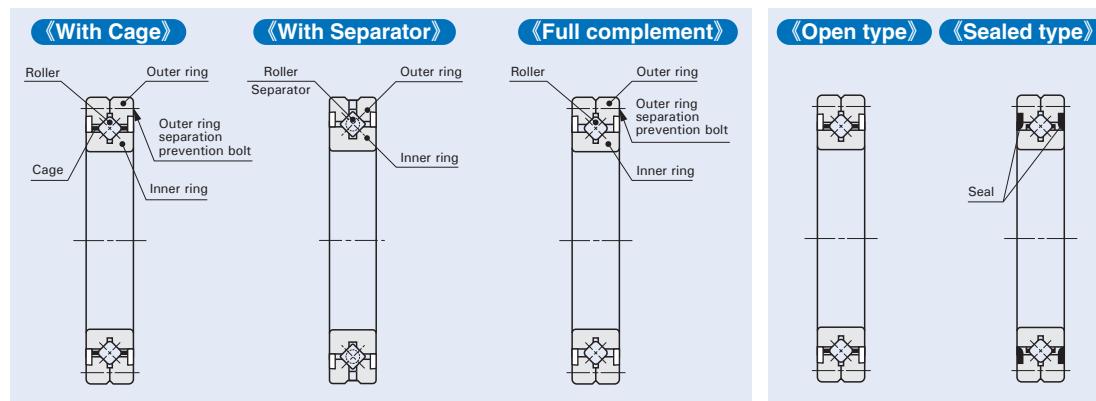

Identification number

The identification number of Crossed Roller Bearings consists of a model code, dimensions, any supplemental codes and a classification symbol. Some examples are shown below.

Examples of identification number

	Model code	Dimensions	Supplemental code	Classification symbol
Example 1	CRBVH 150 25 A	T T P	UU C1	P6
Example 2	CRBC 150 25	T T	UU C1	P6
Example 3	CRBT 30 5 A	T T P	C1	
Example 4	CRBS 150 8 A	T T P	UU C1	
Example 5	CRBFV 115 28 A	D UU C1	RP6	

Model code

CRBVH ...A	High Rigidity Type Crossed Roller Bearings V (With Separator)
CRBFV ...A	Mounting Holed Type High Rigidity Crossed Roller Bearings V (With Separator)
CRBC	Standard Type Crossed Roller Bearings (With Cage)
CRB	Standard Type Crossed Roller Bearings (Full complement)
CRBT ...A	Super Slim Type Crossed Roller Bearings (With Separator)
CRBTF ...A	Mounting Holed Type Super Slim Crossed Roller Bearings (With Separator)
CRBS	Slim Type Crossed Roller Bearings (With Cage)
CRBS ...A	Slim Type Crossed Roller Bearings (With Separator)
CRBS ...V	Slim Type Crossed Roller Bearings (Full complement)

Dimension

The dimension indicates the bore diameter of the bearing. (unit : mm)

The dimension indicates the bearing width. (unit : mm)

Supplemental code - 1⁽¹⁾

T With female threaded mounting holes on the inner ring

No symbol With counter-bored mounting holes on both inner ring and outer ring in the same direction.

D With counter-bored mounting holes on both inner ring and outer ring in the opposite direction.

Note⁽¹⁾ Applicable to Mounting Holed Type Crossed Roller Bearings.
Note that with female threaded mounting holes on the inner ring (T) is only applicable for Mounting Holed Type Super Slim Crossed Roller Bearings.

Supplemental code - 2

No symbol	Open type	For application, please see table 2.
UU	Sealed type	

Supplemental code - 3

T1	: T1 clearance	For application, please see table 3.
C1	: C1 clearance	
C2	: C2 clearance	
No symbol	: Normal clearance	

Classification symbol

No symbol	Accuracy class 0	For application, please see table 4.
P6	Accuracy class 6	
P5	Accuracy class 5	
P4	Accuracy class 4	
P2	Accuracy class 2	
RP6	Rotational accuracy class 6	
RP5	Rotational accuracy class 5	
RP4	Rotational accuracy class 4	
RP2	Rotational accuracy class 2	

Rotational accuracy class--classes specifying accuracy standards for only rotational accuracy (radial runout, axial runout).

CRBVH
CRBFV
CRBC
CRBT
CRBTF
CRBS

Table 2 Seal Specification

Model code	No Symbol	UU	U
CRBHV … A	O	O	—
CRBFV … A	O	O	—
CRBC	O	O	O
CRB	O	O	O
CRBT … A	O	—	—
CRBTF … A	O	—	—
CRBS	O	—	—
CRBS … A	—	O	O
CRBS … V	O	O	O

Table 3 Clearance Specification

Model code	T1	C1	C2	No Symbol
CRBHV … A	O	O	O	—
CRBFV … A	O	O	O	—
CRBC	O	O	O	—
CRB	O	O	O	—
CRBT … A	—	O	—	—
CRBTF … A	—	O	—	—
CRBS	O	O	—	O
CRBS … A	O	O	—	O
CRBS … V	O	O	—	O

Table 4 Accuracy Class

Model code	No Symbol	P6 RP6	P5 RP5	P4 RP4	P2 RP2
CRBHV … A	O	O	O	O	O
CRBFV … A	O	O	O	O	O
CRBC	O	O	O	O	O
CRB	O	O	O	O	O
CRBT … A	O	—	—	—	—
CRBTF … A	O	—	—	—	—
CRBS	O	—	—	—	—
CRBS … A	O	—	—	—	—
CRBS … V	O	—	—	—	—

Dynamic Equivalent Load

The direction of basic dynamic load rating of Crossed Roller Bearing is the radial direction. When a load in any direction other than the direction of basic dynamic load rating or a complex load is applied, calculate the dynamic equivalent load to calculate the rating life.

$$P_r = X \left(F_r + \frac{2M}{D_{pw}} \right) + Y F_a \quad (1)$$

where, P_r : Dynamic equivalent radial load, N

F_r : Radial load, N

F_a : Axial load, N


M : Moment, N-mm

D_{pw} : Pitch circle diameter of roller set, mm

$$\left(D_{pw} = \frac{d + D}{2} \right)$$

X : Radial load factor (Refer to Table 5.)

Y : Axial load factor (Refer to Table 5.)

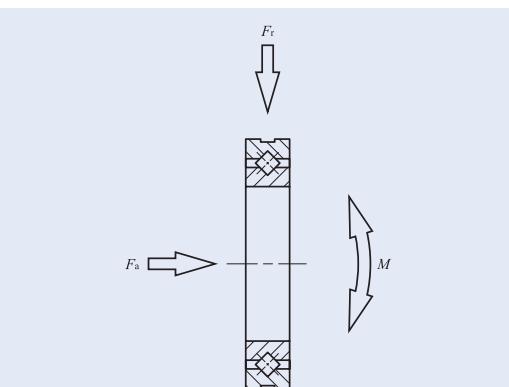**Fig. 1 Load direction****Table 5 Radial load factor and axial load factor**

Conditions	X	Y
$\frac{F_a}{F_r + 2M/D_{pw}} \leq 1.5$	1	0.45
$\frac{F_a}{F_r + 2M/D_{pw}} > 1.5$	0.67	0.67

Static Equivalent Load

The direction of basic static load rating of Crossed Roller Bearing is the radial direction. When a load in any direction other than the direction of basic static load rating or a complex load is applied, calculate the static equivalent load to calculate the static safety factor.

$$P_{0r} = F_r + \frac{2M}{D_{pw}} + 0.44 F_a \quad (2)$$

where, P_{0r} : Static equivalent radial load, N

F_r : Radial load, N

F_a : Axial load, N

M : Moment, N-mm

D_{pw} : Pitch circle diameter of roller set, mm

$$\left(D_{pw} = \frac{d + D}{2} \right)$$

Accuracy

The accuracy of Crossed Roller Bearings, Mounting Holed Type Super Slim Crossed Roller Bearings, Slim Type Crossed Roller Bearings and Mounting Holed

Type High Rigidity Crossed Roller Bearings V is shown below in Table 6 - 10.2.

Bearings with special accuracy are also options. Please consult IKO.

Table 6 Tolerances and allowable values of inner rings and tolerances of outer ring width

unit: μm

Nominal bore diameter mm	Δ_{dmp} (1) Single plane mean bore dia. deviation								Δ_{bs} Deviation of a single inner ring width		Δ_{cs} (2) Deviation of a single outer ring width				K _{ia} Radial run-out of assembled bearing inner ring				S _{ia} Assembled bearing inner ring face run-out with raceway				
	Class 0 RP6-2		P6		P5		P4		High		Low		Class 0 RP6		P6		P5		P4		P2 RP2		
	Over	Incl.	High	Low	High	Low	High	Low	High	Low	High	Low	0	RP6	RP5	RP4	RP2	Class 0 RP6	P6	RP5	RP4	P2 RP2	
18	30	0	-10	0	-8	0	-6	0	-5	0	-75	0	-100	13	8	4	3	2.5	13	8	4	3	2.5
30	50	0	-12	0	-10	0	-8	0	-6	0	-75	0	-100	15	10	5	4	2.5	15	10	5	4	2.5
50	80	0	-15	0	-12	0	-9	0	-7	0	-75	0	-100	20	10	5	4	2.5	20	10	5	4	2.5
80	120	0	-20	0	-15	0	-10	0	-8	0	-75	0	-100	25	13	6	5	2.5	25	13	6	5	2.5
120	150	0	-25	0	-18	0	-13	0	-10	0	-100	0	-120	30	18	8	6	2.5	30	18	8	6	2.5
150	180	0	-25	0	-18	0	-13	0	-10	0	-100	0	-120	30	18	8	6	5	30	18	8	6	5
180	250	0	-30	0	-22	0	-15	0	-12	0	-100	0	-120	40	20	10	8	5	40	20	10	8	5
250	315	0	-35	0	-25	0	-18	—	—	0	-120	0	-150	50	25	13	10	7	50	25	13	10	7
315	400	0	-40	0	-30	0	-23	—	—	0	-150	0	-200	60	30	15	12	8	60	30	15	12	8
400	500	0	-45	0	-35	—	—	—	—	0	-150	0	-200	65	35	18	14	10	65	35	18	14	10
500	630	0	-50	0	-40	—	—	—	—	0	-150	0	-200	70	40	20	16	12	70	40	20	16	12
630	800	0	-75	—	—	—	—	—	—	0	-150	0	-200	80	50	25	20	15	80	50	25	20	15

Notes⁽¹⁾ For accuracy class P2 and other classes without a numerical description, the highest grade numerical value among the lower accuracy classes in the same nominal bore diameter range is applied.

⁽²⁾ For High Rigidity Type Crossed Roller Bearings V, the tolerances for deviation of a single inner ring width are applicable to those of a single outer ring width.

Remark The accuracy specified in this table is not applicable to Mounting Holed Type Super Slim Crossed Roller Bearings, Slim Type Crossed Roller Bearings, and Mounting Holed Type High Rigidity Crossed Roller Bearings V.

Table 7 Tolerances and allowable values of outer ring

unit: μm

Nominal outside diameter mm	Δ_{Dmp} (1) Single plane mean outside dia. deviation								K _{ea} Radial run-out of assembled bearing outer ring				S _{ea} Assembled bearing outer ring face run-out with raceway						
	Class 0 RP6-2		P6		P5		P4		Class 0 RP6		P6		P5		P4 ⁽²⁾		P2 ⁽²⁾		
	Over	Incl.	High	Low	High	Low	High	Low	High	Low	0	RP6	RP5	RP4	RP2	Class 0 RP6	P6	RP5	RP4
30	50	0	-11	0	-9	0	-7	0	-6	20	10	7	5	2.5	2				

Table 8 Tolerances and allowable values of Mounting Holed Type Super Slim Crossed Roller Bearings unit: μm

d Nominal bore diameter mm	Δ_{dmp} Single plane mean bore dia. deviation		Δ_{Dmp} Single plane mean outside dia. deviation		Δ_{Bs} and Δ_{Cs} Deviations of a single inner ring width and outer ring width		K_{ia} and S_{ia} Radial and axial run-out of assembled bearing inner ring		K_{ea} and S_{ea} Radial and axial run-out of assembled bearing outer ring	
	High	Low	High	Low	High	Low	High	Low	High	Low
10	0	-8(-8)	0	-9(-11)	0	-75	10(13)	15(20)		
15	0	-8	0	-9	0	-75	10	15		
20	0	-10(-10)	0	-11(-13)	0	-75	13(13)	20(20)		
30	0	-10(-10)	0	-11(-13)	0	-75	13(15)	20(25)		
40	0	-12(-12)	0	-13(-13)	0	-75	15(15)	25(25)		
50	0	-12	0	-13	0	-75	15	25		

Remark The values in () represent that of Mounting Holed Type Super Slim Crossed Roller Bearings.

Table 9 Tolerances and allowable values of Slim Type Crossed Roller Bearings unit: μm

d Nominal bore diameter mm	Δ_{dmp} Single plane mean bore dia. deviation		Δ_{Dmp} Single plane mean outside dia. deviation		Δ_{Bs} and Δ_{Cs} Deviations of a single inner ring width and outer ring width		K_{ia} and S_{ia} Radial and axial run-out of assembled bearing inner ring		K_{ea} and S_{ea} Radial and axial run-out of assembled bearing outer ring	
	High	Low	High	Low	High	Low	High	Low	High	Low
50	0	-15	0	-13	0	-127	13	13		
60	0	-15	0	-13	0	-127	13	13		
70	0	-15	0	-15	0	-127	15	15		
80	0	-20	0	-15	0	-127	15	15		
90	0	-20	0	-15	0	-127	15	15		
100	0	-20	0	-15	0	-127	15	15		
110	0	-20	0	-20	0	-127	20	20		
120	0	-25	0	-20	0	-127	20	20		
130	0	-25	0	-25	0	-127	25	25		
140	0	-25	0	-25	0	-127	25	25		
150	0	-25	0	-25	0	-127	25	25		
160	0	-25	0	-25	0	-127	25	25		
170	0	-25	0	-30	0	-127	25	25		
180	0	-30	0	-30	0	-127	30	30		
190	0	-30	0	-30	0	-127	30	30		
200	0	-30	0	-30	0	-127	30	30		

Table 10.1 Tolerances and allowable values of inner rings of Mounting Holed Type High Rigidity Crossed Roller Bearings V unit: μm

d Nominal bore diameter mm	Δ_{dmp} Single plane mean bore dia. deviation						Δ_{Bs} Deviation of a single inner ring width	K_{ia} Radial run-out of assembled bearing inner ring			S_{ia} Assembled bearing inner ring face run-out with raceway					
	Class 0 RP6-2	Over	Incl.	High	Low	High		High	Low	High	Low	High	P6	P5	P4	P2
-	20	0	-10	0	-8	0	-6	0	-5	0	-75	13	8	4	3	2.5
20	30	0	-10	0	-8	0	-6	0	-5	0	-75	15	10	5	4	2.5
30	35	0	-12	0	-10	0	-8	0	-6	0	-75	15	10	5	4	2.5
35	50	0	-12	0	-10	0	-8	0	-6	0	-75	20	10	5	4	2.5
50	65	0	-15	0	-12	0	-9	0	-7	0	-75	20	10	5	4	2.5
65	80	0	-15	0	-12	0	-9	0	-7	0	-75	25	13	6	5	2.5
80	100	0	-20	0	-15	0	-10	0	-8	0	-75	25	13	6	5	2.5
100	120	0	-20	0	-15	0	-10	0	-8	0	-75	30	18	8	6	2.5

Table 10.2 Tolerances and allowable values of outer rings of Mounting Holed Type High Rigidity Crossed Roller Bearings V unit: μm



D Nominal outside diameter mm	Δ_{Dmp} Single plane mean outside dia. deviation						Δ_{Cs} Deviation of a single outer ring width	K_{ea} Radial run-out of assembled bearing outer ring					S_{ea} Assembled bearing outer ring face run-out with raceway								
	Over	Incl.	High	Low	High	Low		High	Low	High	Low	High	Low	High	Low	High	Low				
50	60	0	-13	0	-11	0	-9	0	-7	0	-75	20	10	7	5	2.5	20	10	7	5	2.5
60	80	0	-13	0	-11	0	-9	0	-7	0	-75	25	13	8	5	4	25	13	8	5	4
80	95	0	-15	0	-13	0	-10	0	-8	0	-75	25	13	8	5	4	25	13	8	5	4
95	120	0	-15	0	-13	0	-10	0	-8	0	-75	35	18	10	6	5	35	18	10	6	5
120	140	0	-18	0	-15	0	-11	0	-9	0	-75	35	18	10	6	5	35	18	10	6	5
140	150	0	-18	0	-15	0	-11	0	-9	0	-75	40	20	11	7	5	40	20	11	7	5
150	165	0	-25	0	-18	0	-13	0	-10	0	-75	40	20	11	7	5	40	20	11	7	5
165	180	0	-25	0	-18	0	-13	0	-10	0	-75	45	23	13	8	5	45	23	13	8	5
180	210	0	-30	0	-20	0	-15	0	-11	0	-75	45	23	13	8	5	45	23	13	8	5
210	240	0	-30	0	-20	0	-15	0	-11	0	-75	50	25	15	10	7	50	25	15	10	7

Clearance

The radial internal clearances of Crossed Roller Bearings, Mounting Holed Type Super Slim Crossed Roller Bearings, Slim Type Crossed Roller Bearings and Mounting Holed Type High Rigidity Crossed Roller Bearings V are shown below in Table 11.1-11.4.

Table 11.1 Radial internal clearances unit: μm

d Nominal bore diameter mm	Radial internal clearance					
	Over	Incl.	Min.	Max.	Min.	Max.
-	30	40	-10	0	0	10
30	40	40	-10	0	0	10
40	50	50	-10	0	0	10
50	65	65	-10	0	0	10
65	80	80	-10	0	0	15
80	100	100	-10	0	0	15
100	120	120	-15	0	0	15
120	140	140	-15	0	0	20
140	160	160	-			

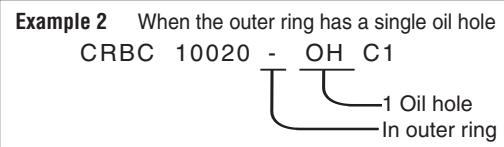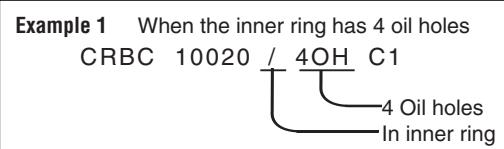

Operating Temperature Range

The operating temperature range for Crossed Roller Bearings is $-20^{\circ}\text{C} \sim +120^{\circ}\text{C}$. However, the maximum allowable temperature for types with separator and with seal is $+110^{\circ}\text{C}$, and $+100^{\circ}\text{C}$ when they are continuously operated.

Mounting

When the rigidity of the mounting parts is not sufficient, stress concentration will occur at the contact area between the rollers and raceways, and the bearing performance will be deteriorated significantly. Therefore, it is necessary to carefully examine the rigidity of housing and the strength of fixing bolts when a large moment will be applied.

The shoulder height diameters (d_a and D_a) that are related to mounting should certainly satisfy the values shown in the dimension tables. When these dimensions are incorrect, deformations of inner and outer rings will occur and the bearing performance will be deteriorated remarkably.

1. Other than Mounting Holed Type Crossed Roller Bearings

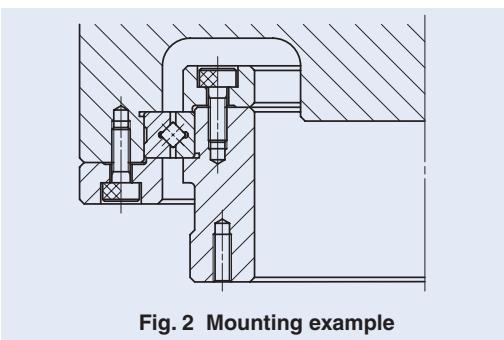


Fig. 2 Mounting example

① The inner and outer rings should be securely fixed in the axial direction by using fixing plates, etc. Recommended thickness of the fixing plate is 1/2 or more of the bearing width B . The dimensions in the axial direction of the housing bore and the fixing

plates should be determined to get a secure fixing while considering the dimension of bearing width which is given a minus tolerance. (See Fig.2)

- ② The depth of the housing bore is recommended to be equal to or larger than the bearing width.
- ③ Separation prevention bolts for the outer ring of Standard Type Crossed Roller Bearings are provided to prevent separation of two halves of the outer ring during transportation or mounting. When mounting, they should be loosened slightly.
- ④ High Rigidity Type Crossed Roller Bearings V, Super Slim Type Crossed Roller Bearings and Slim Type Crossed Roller Bearings have a plug for hole for inserting rollers. When mounting the bearings, locate the plug at a position that is not included in the maximum loading zone. The plug location can be found by the pin pressed at the side of the outer ring.

2. Mounting Holed Type High Rigidity Crossed Roller Bearings V, Mounting Holed Type Super Slim Crossed Roller Bearings

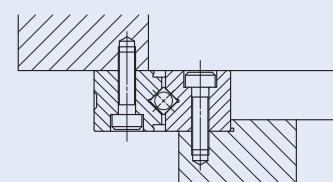


Fig. 3 Example of direct mounting to the mating surface of Mounting Holed Type High Rigidity Crossed Roller Bearings V

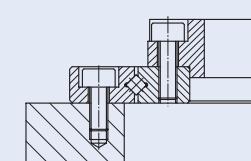


Fig. 4 Example of direct mounting to the mating surface of Mounting Holed Type Super Slim Crossed Roller Bearings

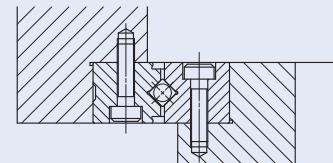


Fig. 5 Example of mounting to the housing of Mounting Holed Type High Rigidity Crossed Roller Bearings V

① Mounting Holed Type High Rigidity Crossed Roller Bearings V, Mounting Holed Type Super Slim Crossed Roller Bearings can be mounted directly to the mounting surface by fixing bolts. (See Fig. 3, Fig. 4)

② If large number of radial load and/or moment is expected, it is recommended to prepare flange part. (See Fig.5)

③ Mounting Holed Type High Rigidity Crossed Roller Bearings V, Mounting Holed Type Super Slim Crossed Roller Bearings have a plug for hole for inserting cylindrical rollers. When mounting the bearings, locate the plug at a position that is not included in the maximum loading zone. The plug location can be found by the pin pressed at the side of the outer ring.

Tightening torque of mounting bolts

The standard tightening torque values for Mounting Holed Type High Rigidity Crossed Roller Bearings V, Mounting Holed Type Super Slim Crossed Roller Bearings mounting bolts are shown in Table 16. When machines or equipment are subjected to severe vibration, shock, large fluctuating load, or moment load, the bolts should be tightened with a torque 1.2 to 1.5 times higher than the standard torque values shown. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristics of the mating member material.

Please do not tighten with too much torque as abnormal frictional torque or short life may occur.

Table 16 Tightening torque of mounting bolts

Bolt size	Tightening torque N·m
M2.5 × 0.45	0.58
M3 × 0.5	1.7
M4 × 0.7	4.0
M5 × 0.8	7.9
M8 × 1.25	32

Above values are for Carbon steel bolt (Strength division 12.9)


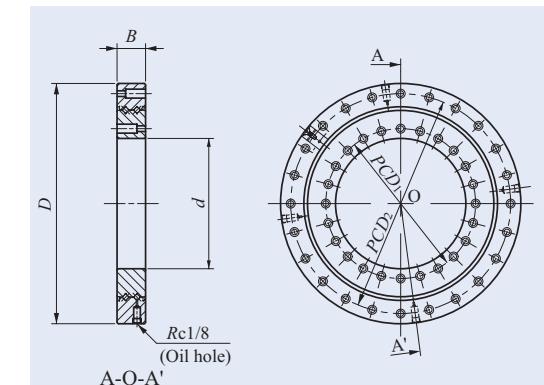


Fig. 7 Manufacturing example

Table 17 Example of manufacturing dimensions

Boundary dimensions mm						Basic dynamic load rating C N	Basic static load rating C ₀ N
d	D	B	r _{min}	PCD ₁	PCD ₂		
160	295	35	2	184	270	60 300	167 000
210	380	40	2.5	240	350	108 000	313 000
350	540	50	2.5	385	505	235 000	725 000

Structure of Double-acting Angular Roller Bearing

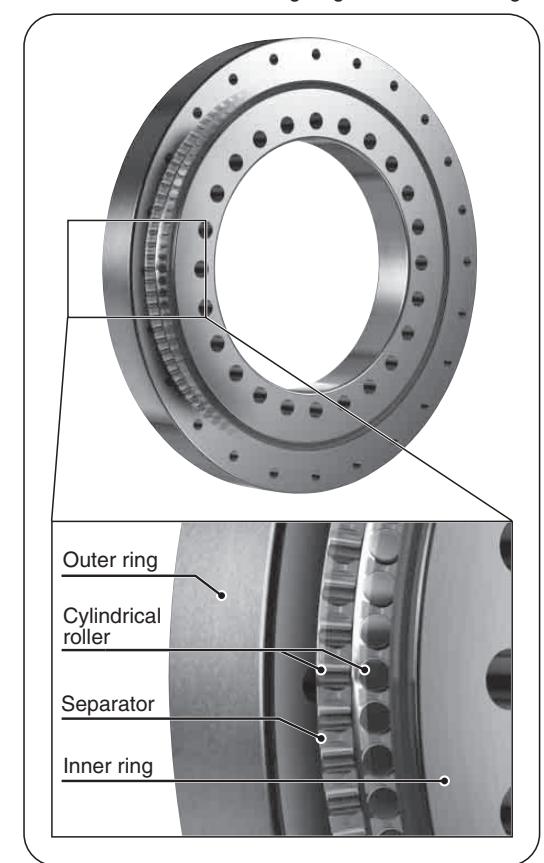


CRBV
CRBFV
CRB(C)
CRBT
CRBTF
CRBS

CROSSED ROLLER BEARINGS


High Rigidity Type Crossed Roller Bearings V

Open Type/With Separator

Sealed Type/With Separator

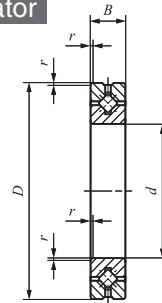

CRBHV ... A

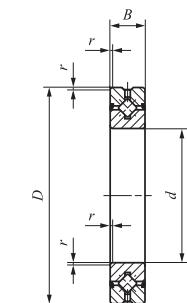

CRBHV ... AUU

Shaft dia. 20 – 300mm

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm			
	High Rigidity Type Crossed Roller Bearings V Open Type	Sealed Type		d	D	B	$r_{\min}^{(1)}$
20	CRBHV 208 A	CRBHV 208 A UU	0.04	20	36	8	0.3
25	CRBHV 258 A	CRBHV 258 A UU	0.05	25	41	8	0.3
30	CRBHV 3010 A	CRBHV 3010 A UU	0.12	30	55	10	0.3
35	CRBHV 3510 A	CRBHV 3510 A UU	0.13	35	60	10	0.3
40	CRBHV 4010 A	CRBHV 4010 A UU	0.15	40	65	10	0.3
45	CRBHV 4510 A	CRBHV 4510 A UU	0.16	45	70	10	0.3
50	CRBHV 5013 A	CRBHV 5013 A UU	0.29	50	80	13	0.6
60	CRBHV 6013 A	CRBHV 6013 A UU	0.33	60	90	13	0.6
70	CRBHV 7013 A	CRBHV 7013 A UU	0.38	70	100	13	0.6
80	CRBHV 8016 A	CRBHV 8016 A UU	0.74	80	120	16	0.6
90	CRBHV 9016 A	CRBHV 9016 A UU	0.81	90	130	16	0.6
100	CRBHV 10020 A	CRBHV 10020 A UU	1.45	100	150	20	0.6
110	CRBHV 11020 A	CRBHV 11020 A UU	1.56	110	160	20	0.6
120	CRBHV 12025 A	CRBHV 12025 A UU	2.62	120	180	25	1
130	CRBHV 13025 A	CRBHV 13025 A UU	2.82	130	190	25	1
140	CRBHV 14025 A	CRBHV 14025 A UU	2.96	140	200	25	1
150	CRBHV 15025 A	CRBHV 15025 A UU	3.16	150	210	25	1
200	CRBHV 20025 A	CRBHV 20025 A UU	4.00	200	260	25	1
250	CRBHV 25025 A	CRBHV 25025 A UU	4.97	250	310	25	1.5
300	CRBHV 30025 A	CRBHV 30025 A UU	5.29	300	360	25	1.5

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r

Remarks 1. The outer ring has an oil groove and two oil holes.



2. No grease is prepacked for Open Type. Perform proper lubrication. Grease is prepacked for Sealed Type.

3. If one side sealed type are needed, please contact IKO.

Mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C_0 N
d_a	D_a		
24	31	2 910	2 430
29	36	3 120	2 810
36.5	48.5	7 600	8 370
41.5	53.5	7 900	9 130
46.5	58.5	8 610	10 600
51.5	63.5	8 860	11 300
56	74	17 300	20 900
66	84	18 800	24 300
76	94	20 100	27 700
88	112	32 100	43 400
98	122	33 100	46 800
110	140	50 900	72 200
120	150	52 400	77 400
132	168	73 400	108 000
142	178	75 900	115 000
152	188	81 900	130 000
162	198	84 300	138 000
212	248	92 300	169 000
262	298	102 000	207 000
312	348	112 000	245 000

CROSSED ROLLER BEARINGS

Mounting Holed Type High Rigidity Open Type/With Separator
 Crossed Roller Bearings V Sealed Type/With Separator

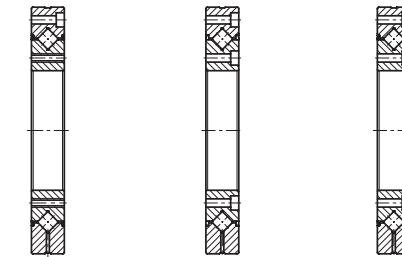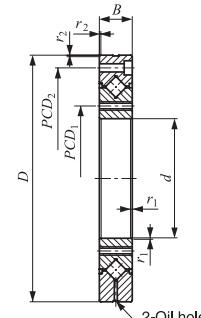

Shaft dia. 10 – 115mm

CRBFV … AT CRBFV … ATUU CRBFV … A CRBFV … AUU


Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm					
	Mounting Holed Type High Rigidity Crossed Roller Bearing V								
	Open Type	Sealed Type		d	D	B	$r_{1\min}^{(1)}$	$r_{2\min}^{(1)}$	
10	CRBFV 108 AT	CRBFV 108 AT UU	0.12	10	52	8	0.3	0.3	
20	CRBFV 2012 AT	CRBFV 2012 AT UU	0.31	20	70	12	0.3	0.3	
25	CRBFV 2512 AT	CRBFV 2512 AT UU	0.40	25	80	12	0.6	0.6	
35	CRBFV 3515 AT	CRBFV 3515 AT UU	0.66	35	95	15	0.6	0.6	
55	CRBFV 5515 AT	CRBFV 5515 AT UU	0.96	55	120	15	0.6	0.6	
80	CRBFV 8022 AT	CRBFV 8022 AT UU	2.63	80	165	22	0.6	1	
	CRBFV 8022 A	CRBFV 8022 A UU	2.60						
	CRBFV 8022 AD	CRBFV 8022 AD UU							
90	CRBFV 9025 AT	CRBFV 9025 AT UU	4.83	90	210	25	1.5	1.5	
	CRBFV 9025 A	CRBFV 9025 A UU	4.67						
	CRBFV 9025 AD	CRBFV 9025 AD UU							
115	CRBFV 11528 AT	CRBFV 11528 AT UU	6.81	115	240	28	1.5	1.5	
	CRBFV 11528 A	CRBFV 11528 A UU	6.63						
	CRBFV 11528 AD	CRBFV 11528 AD UU							

Note⁽¹⁾ Minimum allowable single value of chamfer diameter r_1 and r_2 .

Remarks 1. The outer ring has an oil groove and two oil holes.

2. No grease is prepacked for Open Type. Perform proper lubrication. Grease is prepacked for Sealed Type.

3. If one side sealed type are needed, please contact IKO.

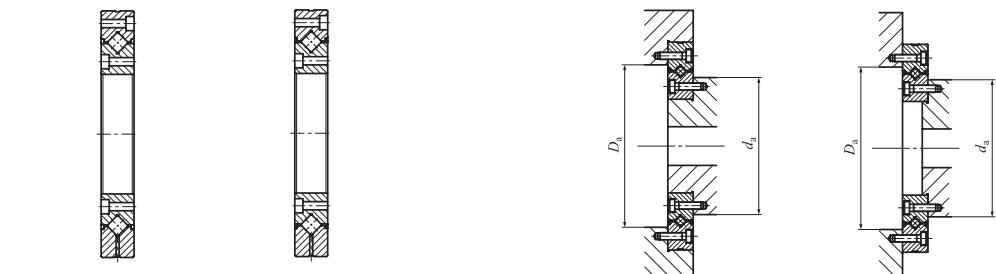

CRBFV … AD CRBFV … ADUU


PCD_1	Mounting holes mm		PCD_2	Outer ring Mounting holes	Mounting dimensions mm	d_a	D_a	Basic dynamic load rating C N	Basic static load rating C_0 N
	Inner ring Mounting holes	Outer ring Mounting holes							
16	4-M3 through	42	6- ϕ 3.4 through ϕ 6.5 counter bore depth 3.3			24	31	2 910	2 430
28	6-M3 through	57	6- ϕ 3.4 through ϕ 6.5 counter bore depth 3.3			36.5	48.5	7 600	8 370
35	6-M3 through	67	6- ϕ 3.4 through ϕ 6.5 counter bore depth 3.3			46.5	58.5	8 610	10 600
45	8-M4 through	83	8- ϕ 4.5 through ϕ 8 counter bore depth 4.4			56	74	17 300	20 900
65	8-M5 through	105	8- ϕ 5.5 through ϕ 9.5 counter bore depth 5.4			76	94	20 100	27 700
97	10-M5 through	148	10- ϕ 5.5 through ϕ 9.5 counter bore depth 5.4			107	137	51 100	72 000
	10- ϕ 5.5 through ϕ 9.5 counter bore depth 5.4								
112	12-M8 through	187	12- ϕ 9 through ϕ 14 counter bore depth 12			132	168	73 400	108 000
	12- ϕ 9 through ϕ 14 counter bore depth 12								
139	12-M8 through	217	12- ϕ 9 through ϕ 14 counter bore depth 13.5			162	198	84 300	138 000
	12- ϕ 9 through ϕ 14 counter bore depth 13.5								

J
CRBHV
CRBFV
CRB(C)
CRBT
CRBTF
CRBS

CROSSED ROLLER BEARINGS

Standard Type Crossed Roller Bearings


Open Type/With Cage Open Type/Full Complement Type
 Sealed Type/With Cage Sealed Type/Full Complement Type

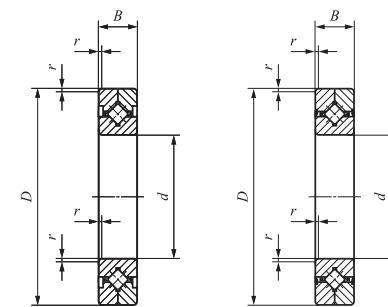


Shaft dia. 30 – 200mm

CRBC

CRBC ··· UU

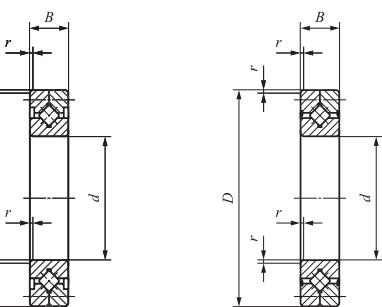

CRB

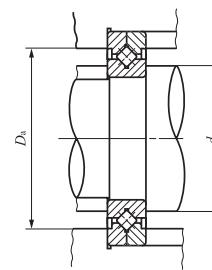

Shaft dia. mm	Identification number				Mass (Ref.) kg	Boundary dimensions mm		
	With Cage		Full complement			d	D	B
	Open Type	Sealed Type	Open Type	Sealed Type				
30	CRBC 3010	CRBC 3010 UU	CRB 3010	CRB 3010 UU	0.12	30	55	10
40	CRBC 4010	CRBC 4010 UU	CRB 4010	CRB 4010 UU	0.15	40	65	10
50	CRBC 5013	CRBC 5013 UU	CRB 5013	CRB 5013 UU	0.29	50	80	13
60	CRBC 6013	CRBC 6013 UU	CRB 6013	CRB 6013 UU	0.33	60	90	13
70	CRBC 7013	CRBC 7013 UU	CRB 7013	CRB 7013 UU	0.38	70	100	13
80	CRBC 8016	CRBC 8016 UU	CRB 8016	CRB 8016 UU	0.74	80	120	16
90	CRBC 9016	CRBC 9016 UU	CRB 9016	CRB 9016 UU	0.81	90	130	16
100	CRBC 10020	CRBC 10020 UU	CRB 10020	CRB 10020 UU	1.45	100	150	20
110	CRBC 11020	CRBC 11020 UU	CRB 11020	CRB 11020 UU	1.56	110	160	20
120	CRBC 12025	CRBC 12025 UU	CRB 12025	CRB 12025 UU	2.62	120	180	25
130	CRBC 13025	CRBC 13025 UU	CRB 13025	CRB 13025 UU	2.82	130	190	25
140	CRBC 14025	CRBC 14025 UU	CRB 14025	CRB 14025 UU	2.96	140	200	25
150	CRBC 15025	CRBC 15025 UU	CRB 15025	CRB 15025 UU	3.16	150	210	25
	CRBC 15030	CRBC 15030 UU	CRB 15030	CRB 15030 UU	5.30	150	230	30
200	CRBC 20025	CRBC 20025 UU	CRB 20025	CRB 20025 UU	4.00	200	260	25
	CRBC 20030	—	CRB 20030	—	6.70	200	280	30
	CRBC 20035	—	CRB 20035	—	9.58	200	295	35

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r'

Remarks 1. No oil hole is provided.

2. No grease is prepakced for Open Type. Perform proper lubrication. Grease is prepakced for Sealed Type.


$r_{\min}^{(1)}$	Mounting dimensions mm		CRBC		CRB	
	d_a	D_a	Basic dynamic load rating C N	Basic static load rating C_0 N	Basic dynamic load rating C N	Basic static load rating C_0 N
0.3	34	44	3 830	4 130	5 290	6 350
0.3	44	54	4 280	5 140	5 980	8 040
0.6	55	71	10 700	12 600	14 200	18 400
0.6	64	81	11 600	14 600	15 400	21 500
0.6	75	91	12 300	16 700	17 000	25 500
0.6	86	107	18 200	25 500	24 300	37 500
1	98	118	19 400	28 600	25 900	42 100
1	108	134	31 500	45 100	39 400	61 100
1	118	144	33 500	50 700	41 200	66 700
1.5	132	164	47 700	70 500	59 900	95 400
1.5	140	172	49 200	74 800	61 000	99 800
1.5	151	183	50 700	79 200	64 100	108 000
1.5	160	192	53 800	87 700	65 000	113 000
1.5	166	202	69 200	108 000	85 900	144 000
2	208	239	60 200	110 000	75 300	148 000
2	218	262	108 000	178 000	133 000	234 000
2	221	274	137 000	215 000	168 000	282 000

J
 CRBHV
 CRBFV
 CRB(C)
 CRBT
 CRBTF
 CRBS

CROSSED ROLLER BEARINGS


Standard Type Crossed Roller Bearings

Open Type/With Cage Open Type/Full Complement Type
 Sealed Type/With Cage Sealed Type/Full Complement Type

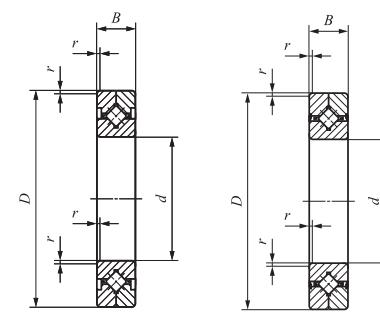

Shaft dia. 250 – 800mm

CRBC 25025
CRBC 30025
CRBC 25025UU
CRBC 30025UU

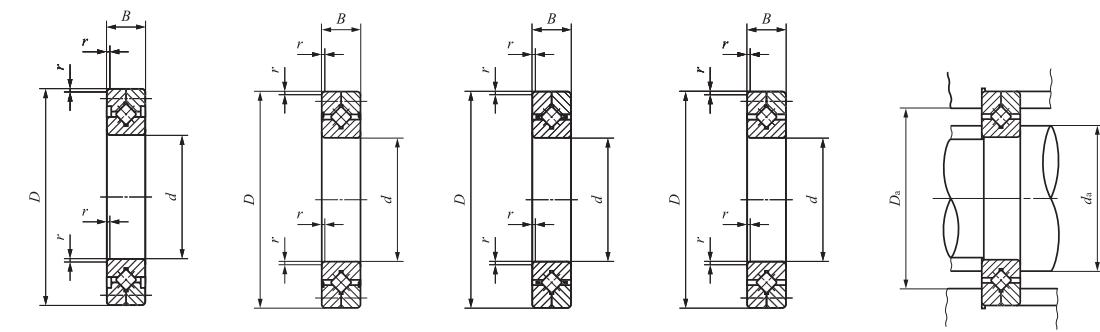

CRB 25025
CRB 30025
CRB 25025UU
CRB 30025UU
CRBC
CRB

Shaft dia. mm	Identification number				Mass (Ref.) kg	Boundary dimensions mm		
	With Cage		Full complement					
	Open Type	Sealed Type	Open Type	Sealed Type	d	D	B	
250	CRBC 25025	CRBC 25025 UU	CRB 25025	CRB 25025 UU	4.97	250	310	25
	CRBC 25030	—	CRB 25030	—	8.10	250	330	30
	CRBC 25040	—	CRB 25040	—	14.8	250	355	40
300	CRBC 30025	CRBC 30025 UU	CRB 30025	CRB 30025 UU	5.88	300	360	25
	CRBC 30035	—	CRB 30035	—	13.4	300	395	35
	CRBC 30040	—	CRB 30040	—	17.2	300	405	40
400	CRBC 40035	—	CRB 40035	—	14.5	400	480	35
	CRBC 40040	—	CRB 40040	—	23.5	400	510	40
	CRBC 40070	—	CRB 40070	—	72.4	400	580	70
500	CRBC 50040	—	CRB 50040	—	26.0	500	600	40
	CRBC 50050	—	CRB 50050	—	41.7	500	625	50
	CRBC 50070	—	CRB 50070	—	86.1	500	680	70
600	CRBC 60040	—	CRB 60040	—	30.6	600	700	40
	CRBC 60070	—	CRB 60070	—	102	600	780	70
	CRBC 600120	—	CRB 600120	—	274	600	870	120
700	CRBC 70045	—	CRB 70045	—	46.5	700	815	45
	CRBC 70070	—	CRB 70070	—	115	700	880	70
	CRBC 700150	—	CRB 700150	—	478	700	1 020	150
800	CRBC 80070	—	CRB 80070	—	109	800	950	70
	CRBC 800100	—	CRB 800100	—	247	800	1 030	100

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r'

Remarks 1. No oil hole is provided.


2. No grease is prepakced for Open Type. Perform proper lubrication. Grease is prepakced for Sealed Type.

$r_{\min}^{(1)}$	Mounting dimensions mm		CRBC		CRB	
	d_a	D_a	Basic dynamic load rating C N	Basic static load rating C_0 N	Basic dynamic load rating C N	Basic static load rating C_0 N
2.5	259	290	67 200	136 000	83 900	183 000
	265	310	116 000	208 000	146 000	283 000
	271	330	179 000	299 000	215 000	382 000
2.5	310	341	73 800	162 000	91 900	217 000
	318	372	163 000	299 000	205 000	408 000
	321	381	194 000	351 000	235 000	451 000
2.5	414	457	133 000	300 000	165 000	400 000
	423	483	222 000	455 000	270 000	590 000
	430	532	470 000	811 000	576 000	1 060 000
2.5	517	573	212 000	497 000	259 000	648 000
	531	592	247 000	561 000	306 000	747 000
	530	633	536 000	1 020 000	653 000	1 330 000
3	621	676	231 000	581 000	287 000	774 000
	630	734	591 000	1 230 000	700 000	1 540 000
	643	817	1 250 000	2 210 000	1 490 000	2 800 000
3	730	785	250 000	681 000	313 000	917 000
	731	834	630 000	1 390 000	766 000	1 810 000
	751	953	1 660 000	3 010 000	1 980 000	3 820 000
4	831	907	417 000	1 090 000	513 000	1 440 000
	840	972	936 000	2 040 000	1 140 000	2 640 000

CRBHV
CRBFV
CRB(C)
CRBT
CRBTF
CRBS

CROSSED ROLLER BEARINGS

Super Slim Type Crossed Roller Bearings Open Type/With Separator

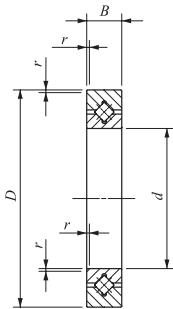

Shaft dia. 10 – 50mm


CRBT...A

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Mounting dimensions mm		Basic dynamic load rating C N
			d	D	B	$r_{\min}^{(1)}$	d_a	D_a	
10	CRBT 105 A	9.0	10	21	5	0.15	12.5	17	1 120
15	CRBT 155 A	11.9	15	26	5	0.15	17.5	22	1 320
20	CRBT 205 A	14.8	20	31	5	0.15	22.5	27	1 400
30	CRBT 305 A	20.7	30	41	5	0.15	32.5	37	1 770
40	CRBT 405 A	26.5	40	51	5	0.15	42.5	47	2 000
50	CRBT 505 A	32.3	50	61	5	0.15	52.5	57	2 280

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r .

Remarks 1. No oil hole is provided.


2. Grease is prepacked.

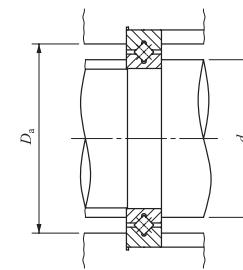

Basic static load rating C_0 N
811
1 110
1 290
1 970
2 520
3 200

CROSSED ROLLER BEARINGS

Mounting Holed Type Super Slim Crossed Roller Bearings Open type/With Separator

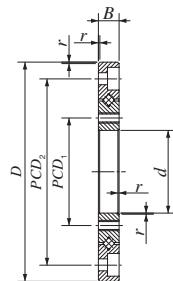

Shaft dia 10 – 40mm


CRBTF...A

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				⁽¹⁾ r_{\min}	Inner ring PCD ₁	Mounting holes
			d	D	B	r_{\min}			
10	CRBTF 105 AT	46	10	43	5	0.15	16	6-M2.5 through	
20	CRBTF 205 AT	66	20	53	5	0.15	26	6-M2.5 through	
30	CRBTF 305 AT	83	30	63	5	0.15	36	8-M2.5 through	
40	CRBTF 405 AT	103	40	73	5	0.15	46	8-M2.5 through	

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r' .

Remarks 1. No oil hole is provided.

2. Grease is prepacked.

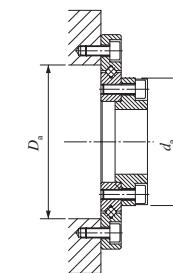

Outer ring PCD _a	Mounting holes mm Mounting holes	Mounting dimensions mm		Basic dynamic load rating C N	Basic static load rating C ₀ N
		d _a	D _a		
35	6- ϕ 2.9 through ϕ 5.5 counter bore depth 2.8	21.5	28	1 500	1 410
45	6- ϕ 2.9 through ϕ 5.5 counter bore depth 2.8	31.5	38	1 890	2 150
55	8- ϕ 2.9 through ϕ 5.5 counter bore depth 2.8	41.5	47.5	2 140	2 750
65	8- ϕ 2.9 through ϕ 5.5 counter bore depth 2.8	51.5	58	2 440	3 490

J

 CRBHV
 CRBFV
 CRB(C)
 CRBT
 CRBTF
 CRBS

CROSSED ROLLER BEARINGS


Slim Type Crossed Roller Bearings

Open Type/With Cage

Open Type/Full Complement Type


Sealed Type/With Separator

Sealed Type/Full Complement Type

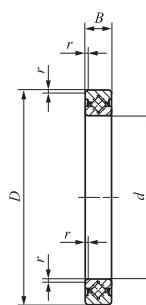


Shaft dia. 50 – 200mm


CRBS

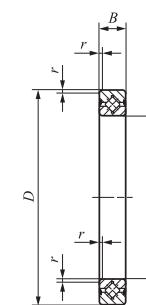

CRBS...AUU
...VUU

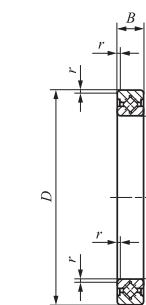

CRBS...V



Shaft dia. mm	Identification number				Mass (Ref.) g
	With Cage Open Type	With Separator Sealed Type	Full complement		
			Open Type	Sealed Type	
50	CRBS 508	CRBS 508 A UU	CRBS 508 V	CRBS 508 V UU	84
60	CRBS 608	CRBS 608 A UU	CRBS 608 V	CRBS 608 V UU	94
70	CRBS 708	CRBS 708 A UU	CRBS 708 V	CRBS 708 V UU	108
80	CRBS 808	CRBS 808 A UU	CRBS 808 V	CRBS 808 V UU	122
90	CRBS 908	CRBS 908 A UU	CRBS 908 V	CRBS 908 V UU	135
100	CRBS 1008	CRBS 1008 A UU	CRBS 1008 V	CRBS 1008 V UU	152
110	CRBS 1108	CRBS 1108 A UU	CRBS 1108 V	CRBS 1108 V UU	163
120	CRBS 1208	CRBS 1208 A UU	CRBS 1208 V	CRBS 1208 V UU	184
130	CRBS 1308	CRBS 1308 A UU	CRBS 1308 V	CRBS 1308 V UU	199
140	CRBS 1408	CRBS 1408 A UU	CRBS 1408 V	CRBS 1408 V UU	205
150	CRBS 1508	CRBS 1508 A UU	CRBS 1508 V	CRBS 1508 V UU	220
160	CRBS 16013	CRBS 16013 A UU	CRBS 16013 V	CRBS 16013 V UU	620
170	CRBS 17013	CRBS 17013 A UU	CRBS 17013 V	CRBS 17013 V UU	675
180	CRBS 18013	CRBS 18013 A UU	CRBS 18013 V	CRBS 18013 V UU	710
190	CRBS 19013	CRBS 19013 A UU	CRBS 19013 V	CRBS 19013 V UU	740
200	CRBS 20013	CRBS 20013 A UU	CRBS 20013 V	CRBS 20013 V UU	780

Note⁽¹⁾ Minimum allowable single value of chamfer dimension r .

⁽²⁾ No grease is prepakced. Perform proper lubrication.

⁽³⁾ Grease is prepakced.

Remark No oil hole is provided.

d	Boundary dimensions mm			Mounting dimensions mm		CRBS ⁽²⁾		CRBS...AUU ⁽³⁾		CRBS...V ⁽²⁾ CRBS...VUU ⁽³⁾	
	D	B	$r_{\min}^{(1)}$	d_a	D_a	With cage Basic dynamic load rating C_N	With cage Basic static load rating C_0N	With Separator Basic dynamic load rating C_N	With Separator Basic static load rating C_0N	Full complement Basic dynamic load rating C_N	Full complement Basic static load rating C_0N
50	66	8	0.4	54	61	4 900	6 170	4 680	5 810	6 930	9 800
60	76	8	0.4	64	71	5 350	7 310	5 350	7 310	7 600	11 700
70	86	8	0.4	74	81	5 740	8 440	5 740	8 440	8 190	13 600
80	96	8	0.4	84	91	6 130	9 590	6 130	9 590	8 790	15 500
90	106	8	0.4	94	101	6 490	10 700	6 490	10 700	9 310	17 400
100	116	8	0.4	104	111	6 850	11 900	6 530	11 100	9 850	19 300
110	126	8	0.4	114	121	7 160	13 000	6 850	12 300	10 300	21 200
120	136	8	0.4	124	131	7 530	14 100	7 070	13 000	10 900	23 000
130	146	8	0.4	134	141	7 860	15 300	7 270	13 800	11 200	24 600
140	156	8	0.4	144	151	8 060	16 400	7 510	14 900	11 700	26 800
150	166	8	0.4	154	161	8 350	17 500	7 810	16 000	12 100	28 700
160	186	13	0.6	166	179	20 300	39 900	19 400	37 700	26 900	58 200
170	196	13	0.6	176	189	20 900	42 200	20 000	39 900	27 800	61 600
180	206	13	0.6	186	199	21 500	44 600	21 900	45 700	28 600	65 200
190	216	13	0.6	196	209	22 100	46 900	22 900	49 200	29 300	68 600
200	226	13	0.6	206	219	22 500	49 300	23 300	51 600	30 000	72 200

CRBHV
CRBFV
CRB(C)
CRBT
CRBTF
CRBS