

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS										CONDUIT BOX								
	A	B	C	D	G	J	K	M	O	P	T	AA	AB	AC	AE	AF	XL	XN	
5810US	29.6	40.6	64.4	14.50	1.6	7.5	9.9	25.8	29.3	29.6	5.8	4.00	34.5	26.8	17.5	11.2	28.7	16.7	
5810UZ	29.6	40.6	67.8	14.50	1.6	7.5	9.9	25.8	29.3	29.6	5.8	4.00	34.5	26.8	17.5	11.2	28.7	16.7	
FRAME SIZE	MOUNTING										SHAFT EXTENSION				KEY SEAT		BEARINGS		MAXIMUM WEIGHT
E	2F	H	BA	N-W	V	U	R	S	ES	LS	OS								
5810US	11.5	36.00	1.38	10.0	8.27	8.00	4.000	3.436	1.000	6.90	6322C3	6320C3*				4800 lbs.			
5810UZ	11.5	36.00	1.38	10.0	11.63	11.38	5.375	4.676	1.250	10.00	NU2232C3	6320C3*							

TAG NO's: _____

CUSTOMER: _____ MOTOR MODEL NO.: _____

P.O. NO.: _____ HP: _____ VOLTAGE: _____ RPM(SYN.): _____ HZ: _____

FRAME SIZE: _____ PRODUCT TYPE: ODP EQP III, EPACT, & HIGH EFFICIENCY

COMMENTS: _____

PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED CERTIFIED

STANDARD (NO AUX. BOXES)

RTD AUX. BOX

SPACE HEATER AUX. BOX

BEARING RTD's

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 2. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 3. KEY DIMENSIONS EQUAL S x S x 6.88 FOR US AND S x S x 10.00 (MOTOR SUPPLIED WITH KEY)
 4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 5. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE
 6. *INSULATED BEARING

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

OPEN DRIP-PROOF
HORIZONTAL FOOT-MOUNTED
3 PHASE INDUCTION MOTOR
F1 ASSEMBLY

XT SERIES

VISIT OUR WEBSITE AT:
www.toshiba.com/ind

TYPICAL MOTOR PERFORMANCE DATA

Model: F5006VLG3BM

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
500	373	6	1190	5810US	460	60	3	656
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
ODP	12	F	1.15	CONT	95.8	-	G	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	500	372.9	655.0	95.9	71.8
¾ Load	375.00	279.6	531.2	95.4	66.7
½ Load	250.00	186.4	425.7	94.2	56.3
¼ Load	125.00	93.2	350.6	90.0	37.1
No Load			326.0		2.0
Locked Rotor			3568.00		29.7

Torque				Rotor wk ²
Full Load (lb-ft)	Locked Rotor (% FLT)	Pull Up (% FLT)	Break Down (% FLT)	Inertia (lb-ft ²)
2207	190	145	225	298.56

Safe Stall Time(s)		Sound Pressure dB(A) @ 1M	Bearings*		Approx. Motor Weight (lbs)
Cold	Hot		DE	NDE	
14.1	7.3	-	6322C3	6320C3 INS	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:ODP
Mounting:Footed,Shaft:US Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


Engineering	bmmamen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 0
Engr. Date	5/13/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

SPEED TORQUE/CURRENT CURVE

Model: F5006VLG3BM

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
500	373	6	1190	5810US	460	60	3	656
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
ODP	12	F	1.15	CONT	95.8	-	G	40 C
Locked Rotor Amps	Rotor wk ² Inertia (lb-ft ²)	Torque						Break Down (%)
		Full Load (lb-ft)	Locked Rotor (%)	Pull Up (%)				
3568.00	298.56	2207	190	145			225	

Design Values

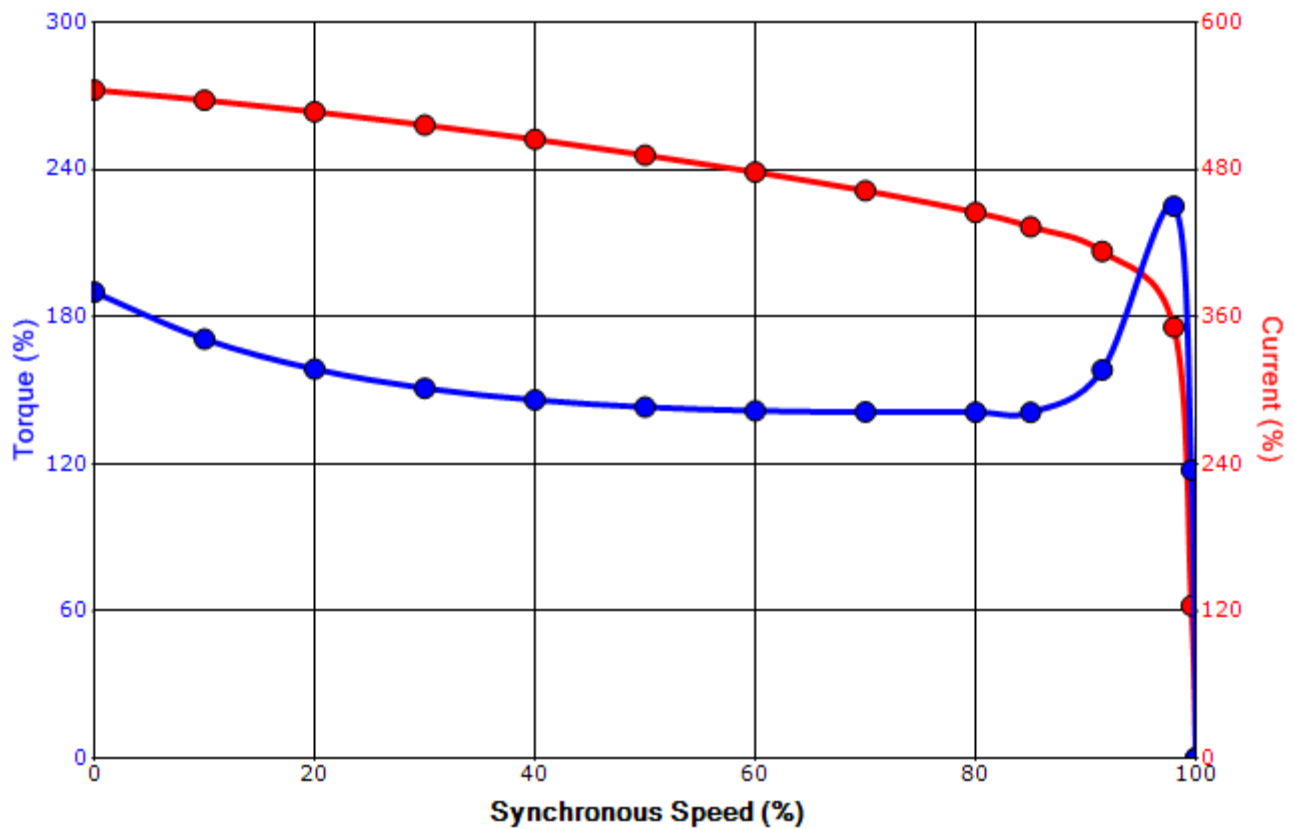

Customer		wk ² Load Inertia (lb-ft ²)	-
Customer PO		Load Type	-
Sales Order		Voltage (%)	100
Project #		Accel. Time	-

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

Engineering	bmmamen	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121 / 0
Engr. Date	5/13/2014	Doc. Approved By	M. Campbell	Doc. Issued	6/8/2011

Motor Connection Diagram
3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.