

UNITS: INCHES

FRAME SIZE	MOTOR DIMENSIONS											CONDUIT BOX							
	A	B	C	D	G	J	K	M	O	P	T	AA	AB	AC	AE	AF	XL	XN	
5810US	29.6	40.6	64.4	14.50	1.6	7.5	9.9	25.8	29.3	29.6	5.8	4.00	34.5	26.8	17.5	11.2	28.7	16.7	
5810UZ	29.6	40.6	67.8	14.50	1.6	7.5	9.9	25.8	29.3	29.6	5.8	4.00	34.5	26.8	17.5	11.2	28.7	16.7	

FRAME SIZE	MOUNTING				SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	E	2F	H	BA	N-W	V	U	R	S	ES	LS	OS	
5810US	11.5	36.00	1.38	10.0	8.27	8.00	4.000	3.436	1.000	6.90	6322C3	6320C3*	4800 lbs.
5810UZ	11.5	36.00	1.38	10.0	11.63	11.38	5.375	4.676	1.250	10.00	NU2232C3	6320C3*	

- NOTES:
1. DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
 2. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 3. KEY DIMENSIONS EQUAL S x S x 6.88 FOR US AND S x S x 10.00 (MOTOR SUPPLIED WITH KEY)
 4. MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME
 5. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE
 6. *INSULATED BEARING

CUSTOMER: _____ MOTOR MODEL NO.: F7004VLG3BM

P.O. NO.: _____ HP: 700 VOLTAGE: 460 RPM(SYN.): 1800 Hz: 60

FRAME SIZE: 5810US PRODUCT TYPE: ODP EQP III, EPACT, & HIGH EFFICIENCY

COMMENTS: _____

TAG NO's.: _____

☒ STANDARD (NO AUX. BOXES)

☐ RTD AUX. BOX

☐ SPACE HEATER AUX. BOX

☐ BEARING RTD's

PER: _____ DATE: _____

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE ☒ PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED ☐ CERTIFIED

TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

OPEN DRIP-PROOF
HORIZONTAL FOOT-MOUNTED
3 PHASE INDUCTION MOTOR
F1 ASSEMBLY

XT SERIES

VISIT OUR WEBSITE AT:
www.toshiba.com/ind

TOSHIBA INTERNATIONAL CORPORATION Industrial Division / Houston Motor Plant SQUIRREL CAGE INDUCTION MOTOR PERFORMANCE SPECIFICATIONS	INDEX	MPCF-1033
	SHEET NO.	1 of 1
	ISSUED	11/08/96
	SUPERSEDES	10/06/95
	REVISION	1
	WRITTEN BY	R. EVANS
	APPROVED BY	<i>Jay Bugbee</i>

Customer Tag:

CUSTOMER:

TIC SR No.:

Customer PO:

MOTOR NAMEPLATE DATA				
H.P.: 700	VOLTS: 460	3 Ø / 60	Hz	S. RPM: 1800
FRAME: 5810US	ENCL: ODP	FLAMPS: 852		FLRPM: 1785
FORM:	S.F.: 1.15	NEMA DESIGN: B		INSUL CLASS: F
TYPE: TIKK	AMB: 40	CODE: F		DUTY: CONT.
MODEL No.: F7004VLG3BM		kW:		Serial No.:
NOM. EFF.: 95.4	MIN. EFF.:	P.F.:		

AMPERAGE	TORQUES	** BEARINGS:
Locked Rotor: 4751	FULL LOAD (lb-ft.): 2060 LOCKED ROTOR (%): 190 BREAK DOWN (%): 270	Drive End: 6322C3 Opposite Drive End: 6320C3

EFFICIENCY (%)	POWER FACTOR (%)
FULL LOAD: 95.5 3/4 LOAD: 95 1/2 LOAD: 94.3	FULL LOAD: 69.4 3/4 LOAD: 77.7 1/2 LOAD: 69.3

ALL CHARACTERISTICS ARE AVERAGE EXPECTED VALUES BASED UPON RATED VOLTAGE, FREQUENCY AND SINEWAVE POWER INPUT. * TEMPERATURE RISE WILL BE CONSISTENT WITH INSULATION, AMBIENT AND SERVICE FACTOR AS DEFINED BY NEMA-MG-12.43 OR -20.40. ** BEARINGS ARE THE ONLY RECOMMENDED SPARE PART(S).
--

CERTIFIED BY:
DATE:

TOSHIBA

Reliability in Motion

TOSHIBA INTERNATIONAL CORPORATION

INDUSTRIAL DIVISION

PO BOX 40906

HOUSTON TX 77240

(713) 466-0277

(800) 231-1412

FAX (713) 466-8773

SPARE PARTS (RECOMMENDED)

OTHER THAN THE GREASE USED FOR RE-GREASABLE BEARINGS, **TOSHIBA** ADVISES THAT THERE ARE NO "USE" PARTS. THE ONLY INSURANCE SPARES THAT **TOSHIBA** SUGGESTS FOR THESE SQUIRREL CAGE INDUCTION MOTORS ARE INDUSTRY STANDARD, AND COMMERCIALY AVAILABLE ANTI-FRICTION BEARINGS, AS NOTED BELOW.

MOTOR COMPONENTS (SUCH AS TERMINAL BOXES, FAN COVERS, MACHINED PARTS) ARE AVAILABLE UPON SPECIAL REQUEST. IN THIS CASE, PLEASE ADVISE OUR ORDER ENTRY DEPARTMENT THE MODEL AND SERIAL NUMBERS (FOUND ON THE MOTOR NAMEPLATE) , AND A DESCRIPTION OF THE COMPONENT REQUIRED. THEY WILL THEN FURNISH THE CURRENT PART NUMBER, PRICE AND AVAILABILITY.

(NOTE: OUR INTERNAL PART NUMBERS ARE SUBJECT TO CHANGE WITHOUT NOTICE, AND ARE NOT PUBLISHED).

PLEASE ADVISE IF YOU HAVE ANY QUESTIONS.

CUSTOMER:

PURCHASE ORDER #

Customer Tag:

TOSHIBA FILE #

MODEL # F7004VLG3BM

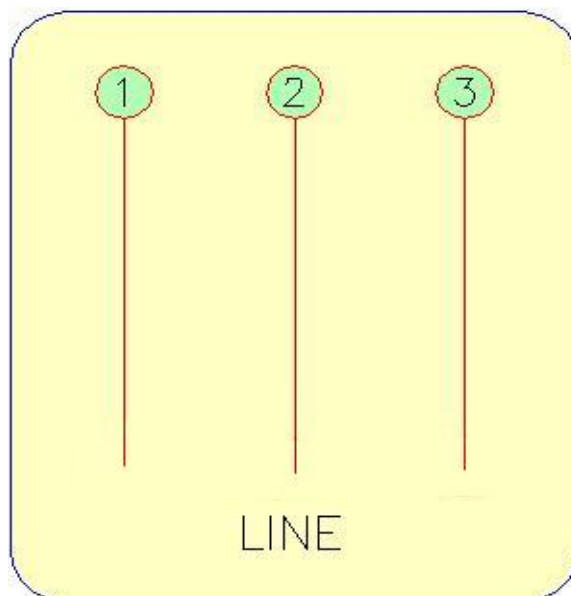
HP / RPM / ENCL / FRAME: 700 / 1800 / ODP / 5810US

DRIVE END BEARING: 6322C3

OPPOSITE DRIVE END BEARING: 6320C3

Prepared By:

Date:

Three Phase Motor Wiring Diagram**"Across the line" (Full Voltage) Starting**

Customer Name:

PO No.:

Customer Tag:

TIC File No.:

Motor Model No. F7004VLG3BM

For Further Information Regarding Toshiba motor starting, maintenance or wiring,
Please refer to the "Toshiba - A Quality Product for World Energy" Installation and
Maintenance Manual, or contact the Toshiba Low Voltage Motor Marketing Department.
(800) 231-1412

Prepared By:

Date: