

**FAG**


**22230-E1-XL-C4**  
Spherical Roller Bearing

Schaeffler ID:  
0190061790040

Spherical roller bearings 222...-E1, main dimensions to DIN 635-2

**X-life**

Technical information

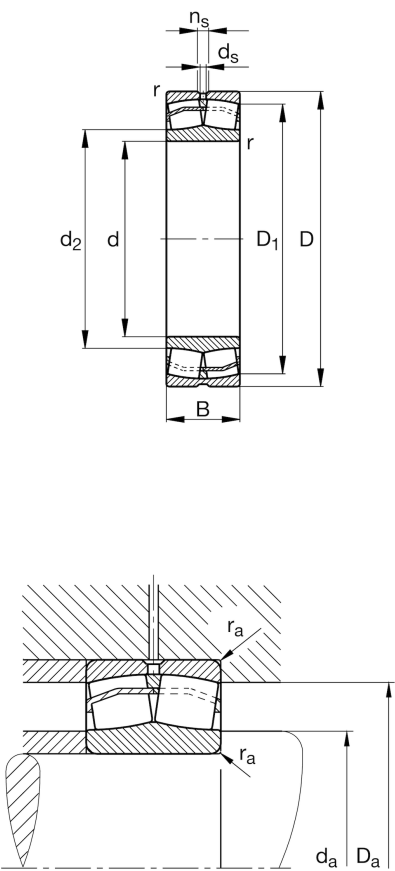

Main Dimensions & Performance Data

d	5,906 in	Bore diameter
D	10,63 in	Outside diameter
B	2,874 in	Width
C <sub>r</sub>	227.068,345 lbf	Basic dynamic load rating, radial
C <sub>0r</sub>	272.032,374 lbf	Basic static load rating, radial
C <sub>ur</sub>	25.629,496 lbf	Fatigue load limit, radial
n <sub>G</sub>	2.900 1/min	Limiting speed
n <sub>gr</sub>	2.050 1/min	Reference speed
	38,823 lbs	Weight

Mounting dimensions

d <sub>a min</sub>	6,457 in	Minimum diameter shaft shoulder
D <sub>a max</sub>	10,079 in	Maximum diameter of housing shoulder
r <sub>a max</sub>	0,098 in	Maximum recess radius

Dimensions

r <sub>min</sub>	0,118 in	Minimum chamfer dimension
D <sub>1</sub>	9,48 in	Bore diameter outer ring
d <sub>2</sub>	7,004 in	Raceway diameter of the inner ring
d <sub>s</sub>	0,315 in	Diameter lubrication hole
n <sub>s</sub>	0,591 in	Width of lubricating groove

Temperature range

T <sub>min</sub>	-22 °F	Operating temperature min.
T <sub>max</sub>	392 °F	Operating temperature max.

Calculation factors		
e	0,25	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y <sub>1</sub>	2,69	Dynamic axial load factor
Y <sub>2</sub>	4	Dynamic axial load factor
Y <sub>0</sub>	2,63	Static axial load factor