
**FAG** 7212-B-XL-TVP-UO

Angular contact ball bearing

Schaeffler ID:
0167253600000Angular contact ball bearing 72..-B-XL-
TVP, single row, X-life, plastic cage

X-life

Technical information

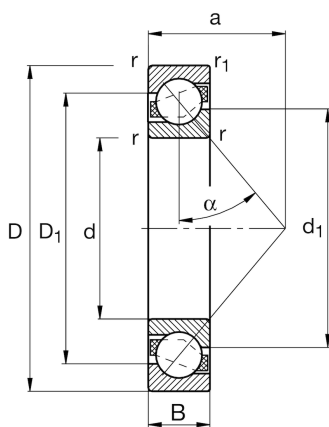

Main Dimensions & Performance Data


d	2,362 in	Bore diameter
D	4,331 in	Outside diameter
B	0,866 in	Width
C _r	13.938,849 lbf	Basic dynamic load rating, radial
C _{0r}	10.116,906 lbf	Basic static load rating, radial
C _{ur}	708,183 lbf	Fatigue load limit, radial
n _G	8.300 1/min	Limiting speed
n _{gr}	6.200 1/min	Reference speed
	1,72 lbs	Weight

Mounting dimensions

d _{a min}	2,717 in	Minimum diameter of shaft shoulder
D _{a max}	3,976 in	Maximum diameter of housing shoulder
D _{b max}	4,11 in	Maximum diameter of housing shoulder
r _{a max}	0,059 in	Maximum fillet radius of shaft
r _{a1 max}	0,039 in	Maximum fillet radius of housing

Dimensions

r _{min}	0,059 in	Minimum chamfer dimension
r _{1 min}	0,039 in	Minimum chamfer dimension
D ₁	3,575 in	Shoulder diameter on outer ring wide side face
d ₁	3,161 in	Shoulder diameter on inner ring wide side face
a	1,85 in	Distance between the apexes of the pressure cones
α	40 °	Contact angle

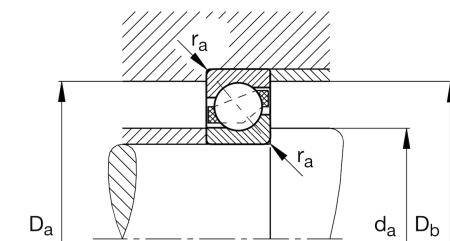

Temperature range

T_{\min}	-22 °F	Operating temperature min.
T_{\max}	248 °F	Operating temperature max.

Additional information

A_{\min}	0 in	Axial clearance per set min.
Tol (+)	0,00047 in	Tolerance for axial clearance or preload per set