

FAG


## 7230-B-XL-MP-UA

Angular contact ball bearing

Schaeffler ID:  
0167257270000Angular contact ball bearing 72..-B-XL-MP,  
single row, X-life, solid brass cage

X-life

## Technical information

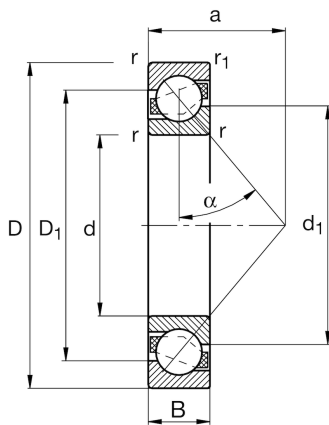

## Main Dimensions &amp; Performance Data

d	5,906 in	Bore diameter
D	10,63 in	Outside diameter
B	1,772 in	Width
$C_r$	55.080,935 lbf	Basic dynamic load rating, radial
$C_{0r}$	61.825,54 lbf	Basic static load rating, radial
$C_{ur}$	2.967,626 lbf	Fatigue load limit, radial
$n_G$	4.100 1/min	Limiting speed
$n_{\vartheta r}$	2.850 1/min	Reference speed
	24,231 lbs	{Weight}

## Mounting dimensions


$d_{a \min}$	6,457 in	Minimum diameter of shaft shoulder
$D_{a \max}$	10,079 in	Maximum diameter of housing shoulder
$D_{b \max}$	10,354 in	Maximum diameter of housing shoulder
$r_{a \max}$	0,098 in	Maximum fillet radius of shaft
$r_{a1 \max}$	0,039 in	Maximum fillet radius of housing

## Dimensions

$r_{\min}$	0,118 in	Minimum chamfer dimension
$r_{1 \min}$	0,043 in	Minimum chamfer dimension
$D_1$	8,799 in	Shoulder diameter on outer ring wide side face
$d_1$	7,776 in	Shoulder diameter on inner ring wide side face
a	4,37 in	Distance between the apexes of the pressure cones
$\alpha$	40 °	Contact angle

## Temperature range

$T_{\min}$	-22 °F	Operating temperature min.
$T_{\max}$	392 °F	Operating temperature max.

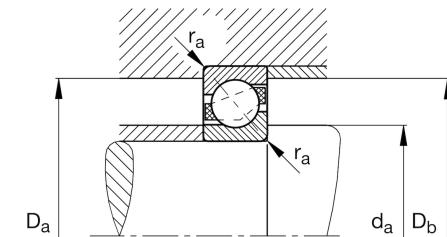

**Additional information**

$A_{\min}$	0,00236 in	Axial clearance per set min.
Tol (+)	0,00047 in	Tolerance for axial clearance or preload per set