



FAG


B71902-E-T-P4S-UL

Spindle bearing

Schaeffler ID:  
0191534220000

Spindle bearing B719...-E, adjusted, in pairs or sets, contact angle  $\alpha = 25^\circ$ , restricted tolerances

Technical information

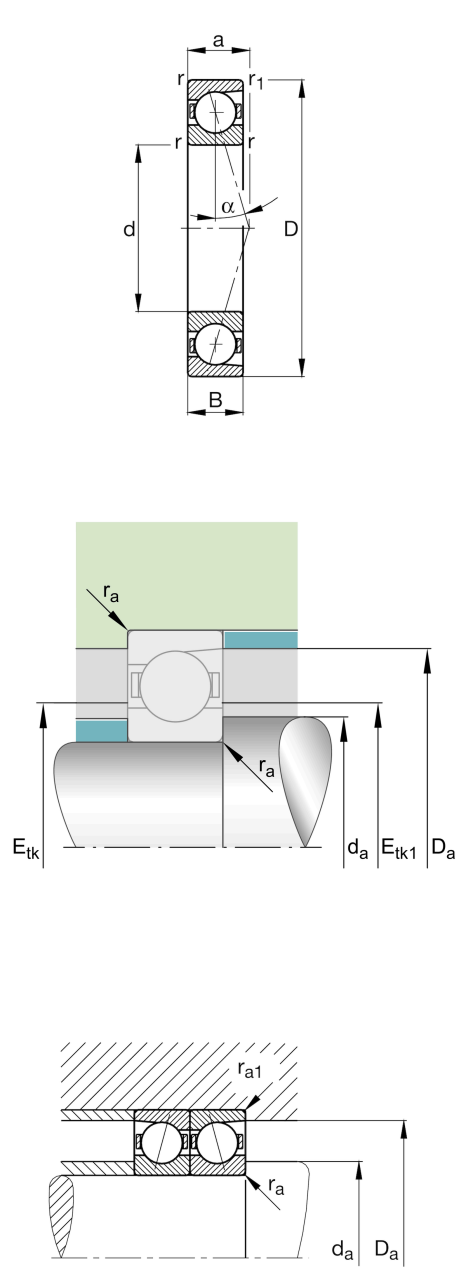

Main Dimensions & Performance Data

d	0,591 in	Bore diameter
D	1,102 in	Outside diameter
B	0,276 in	Width
C <sub>r</sub>	1.090,378 lbf	Basic dynamic load rating, radial
C <sub>0r</sub>	436,151 lbf	Basic static load rating, radial
C <sub>ur</sub>	46,088 lbf	Fatigue load limit, radial
n <sub>G Grease</sub>	50.000 1/min	Limiting speed for grease lubrication
n <sub>G Oil</sub>	75.000 1/min	Limiting speed for oil lubrication
	0,564 oz	Weight

Mounting dimensions

d <sub>a</sub>	0,709 in	Diameter shaft shoulder
d <sub>a</sub>	h12	Diameter shaft shoulder clearance
D <sub>a</sub>	1,004 in	Shoulder diameter outer ring
D <sub>a</sub>	H12	Shoulder diameter outer ring clearance
r <sub>a max</sub>	0,012 in	Maximum recess radius
r <sub>a1 max</sub>	0,004 in	Maximum recess radius
E <sub>tk min</sub>	0,783 in	Minimum diameter injection pitch
E <sub>tk max</sub>	0,823 in	Maximum diameter injection pitch
E <sub>tk1 min</sub>	0,783 in	Minimum diameter injection pitch
E <sub>tk1 max</sub>	0,823 in	Maximum diameter injection pitch
a	0,339 in	Distance between the apexes of the pressure cones

Dimensions

r <sub>min</sub>	0,012 in	Minimum chamfer dimension
r <sub>1 min</sub>	0,012 in	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T <sub>min</sub>	-22 °F	Operating temperature min.
T <sub>max</sub>	212 °F	Operating temperature max.

Additional information

F <sub>VL</sub>	4,946 lbf	Preload force light
F <sub>VM</sub>	24,955 lbf	Preload force medium
F <sub>VH</sub>	57,329 lbf	Preload force heavy
K <sub>aEL</sub>	14,388 lbf	Lift-off force light
K <sub>aEM</sub>	75,54 lbf	Lift-off force medium
K <sub>aEH</sub>	180,98 lbf	Lift-off force heavy
c <sub>aL</sub>	35 N/μm	Axial rigidity light
c <sub>aM</sub>	64,7 N/μm	Axial rigidity medium
c <sub>aH</sub>	91,9 N/μm	Axial rigidity heavy