

FAG


B71909-C-T-P4S-UL

Spindle bearing

Schaeffler ID:
0191538720000

Spindle bearings B719.-C, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, restricted tolerances

Technical information

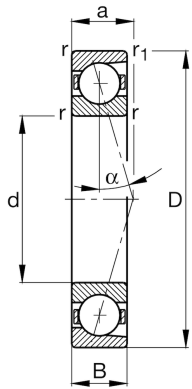

Main Dimensions & Performance Data



d	1,772 in	Bore diameter
D	2,677 in	Outside diameter
B	0,472 in	Width
C_r	4.294,065 lbf	Basic dynamic load rating, radial
C_{0r}	2.517,986 lbf	Basic static load rating, radial
C_{ur}	265,288 lbf	Fatigue load limit, radial
$n_{G\text{ Grease}}$	20.000 1/min	Limiting speed for grease lubrication
$n_{G\text{ Oil}}$	32.000 1/min	Limiting speed for oil lubrication
	4,475 oz	Weight

Mounting dimensions

d_a	1,969 in	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	2,5 in	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a\text{ max}}$	0,024 in	Maximum recess radius
$r_{a1\text{ max}}$	0,006 in	Maximum recess radius
$E_{tk\text{ min}}$	2,059 in	Minimum diameter injection pitch
$E_{tk\text{ max}}$	2,146 in	Maximum diameter injection pitch
$E_{tk1\text{ min}}$	2,059 in	Minimum diameter injection pitch
$E_{tk1\text{ max}}$	2,146 in	Maximum diameter injection pitch
a	0,535 in	Distance between the apexes of the pressure cones

Dimensions

r_{min}	0,024 in	Minimum chamfer dimension
$r_{1\text{ min}}$	0,024 in	Minimum chamfer dimension
α	15 °	Contact angle

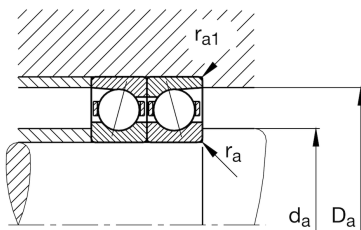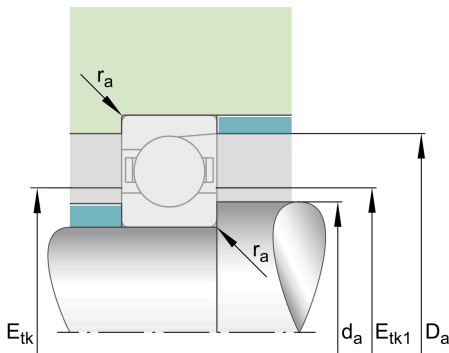

Temperature range

T_{\min}	-22 °F	Operating temperature min.
T_{\max}	212 °F	Operating temperature max.

Additional information

F_{VL}	19,784 lbf	Preload force light
F_{VM}	69,02 lbf	Preload force medium
F_{VH}	141,187 lbf	Preload force heavy
K_{aEL}	60,701 lbf	Lift-off force light
K_{aEM}	230,89 lbf	Lift-off force medium
K_{aEH}	506,07 lbf	Lift-off force heavy
c_{aL}	44 N/μm	Axial rigidity light
c_{aM}	77,5 N/μm	Axial rigidity medium
c_{aH}	112 N/μm	Axial rigidity heavy