


Metric Timing Pulleys




AT Series - 5 mm Pitch Aluminum, Pilot Bore

Part No: 21AT5/20-2

- 21 = Length thru Bore
- AT5 = Tooth Profile and Pitch
- 20 = Number of Teeth
- 2 = Number of Flanges

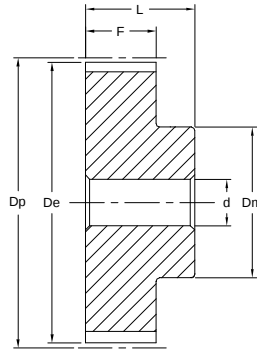

Type 6

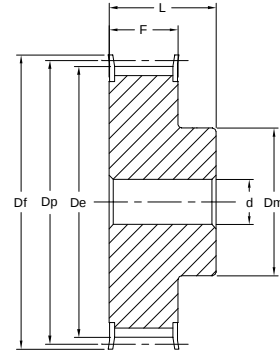

Type 6 F

AT 5 mm Pitch x 10 mm Belt Width

Dimensions in mm

Part No.	Part Code	Teeth	Type	Dp	De	Df	Dm	F	L	d	Wt. kg
21AT5/12-2	12ST5-21	12	6F	19.25	17.85	23.0	11	15	21	4	0.018
21AT5/14-2	14ST5-21	14	6F	22.45	21.05	25.0	14	15	21	4	0.019
21AT5/15-2	15ST5-21	15	6F	24.05	22.65	28.0	16	15	21	6	0.021
21AT5/16-2	16ST5-21	16	6F	25.60	24.20	32.0	18	15	21	6	0.025
21AT5/18-2	18ST5-21	18	6F	28.80	27.40	32.0	20	15	21	6	0.031
21AT5/19-2	19ST5-21	19	6F	30.40	29.00	36.0	22	15	21	6	0.036
21AT5/20-2	20ST5-21	20	6F	32.00	30.60	36.0	23	15	21	6	0.038
21AT5/22-2	22ST5-21	22	6F	35.25	33.85	38.0	24	15	21	6	0.048
21AT5/24-2	24ST5-21	24	6F	38.40	37.00	42.0	26	15	21	6	0.054
21AT5/25-2	25ST5-21	25	6F	40.00	38.60	44.0	26	15	21	6	0.058
21AT5/26-2	26ST5-21	26	6F	41.60	40.20	44.0	26	15	21	6	0.062
21AT5/27-2	27ST5-21	27	6F	43.20	41.80	48.0	30	15	21	8	0.064
21AT5/28-2	28ST5-21	28	6F	44.75	43.35	48.0	32	15	21	8	0.071
21AT5/30-2	30ST5-21	30	6F	47.95	46.55	51.0	34	15	21	8	0.076
21AT5/32-2	32ST5-21	32	6F	51.10	49.70	54.0	38	15	21	8	0.088
21AT5/36-2	36ST5-21	36	6F	57.45	56.05	64.0	38	15	21	8	0.114
21AT5/40-2	40ST5-21	40	6F	63.85	62.45	66.0	40	15	21	8	0.138
21AT5/42-2	42ST5-21	42	6F	67.00	65.60	70.0	40	15	21	8	0.180
21AT5/44-0	44ST5-21	44	6	70.20	68.80	—	45	15	21	8	0.185
21AT5/48-0	48ST5-21	48	6	76.55	75.15	—	50	15	21	8	0.200
21AT5/60-0	60ST5-21	60	6	95.65	94.25	—	65	15	21	8	0.307

AT 5 mm Pitch x 16 mm Belt Width

Part No.	Part Code	Teeth	Type	Dp	De	Df	Dm	F	L	d	Wt. kg
27AT5/12-2	12ST5-27	12	6F	19.25	17.85	23.0	11	21	27	4	0.022
27AT5/14-2	14ST5-27	14	6F	22.45	21.05	25.0	14	21	27	4	0.026
27AT5/15-2	15ST5-27	15	6F	24.05	22.65	28.0	16	21	27	6	0.029
27AT5/16-2	16ST5-27	16	6F	25.60	24.20	32.0	18	21	27	6	0.035
27AT5/18-2	18ST5-27	18	6F	28.80	27.40	32.0	20	21	27	6	0.043
27AT5/19-2	19ST5-27	19	6F	30.40	29.00	36.0	22	21	27	6	0.049
27AT5/20-2	20ST5-27	20	6F	32.00	30.60	36.0	23	21	27	6	0.053
27AT5/22-2	22ST5-27	22	6F	35.25	33.85	38.0	24	21	27	6	0.054
27AT5/24-2	24ST5-27	24	6F	38.40	37.00	42.0	26	21	27	6	0.076
27AT5/25-2	25ST5-27	25	6F	40.00	38.60	44.0	26	21	27	6	0.081
27AT5/26-2	26ST5-27	26	6F	41.60	40.20	44.0	26	21	27	6	0.085
27AT5/27-2	27ST5-27	27	6F	43.20	41.80	48.0	30	21	27	8	0.090
27AT5/28-2	28ST5-27	28	6F	44.75	43.35	48.0	32	21	27	8	0.092
27AT5/30-2	30ST5-27	30	6F	47.95	46.55	51.0	34	21	27	8	0.105
27AT5/32-2	32ST5-27	32	6F	51.10	49.70	54.0	38	21	27	8	0.123
27AT5/36-2	36ST5-27	36	6F	57.45	56.05	64.0	38	21	27	8	0.160
27AT5/40-2	40ST5-27	40	6F	63.85	62.45	66.0	40	21	27	8	0.193
27AT5/42-2	42ST5-27	42	6F	67.00	65.60	70.0	40	21	27	8	0.205
27AT5/44-0	44ST5-27	44	6	70.20	68.80	—	45	21	27	8	0.228
27AT5/48-0	48ST5-27	48	6	76.55	75.15	—	50	21	27	8	0.280
27AT5/60-0	60ST5-27	60	6	95.65	94.25	—	65	21	27	8	0.430

Note: Finished Bore & Keyway available on request.

P.T. International Corp.