

Metric Sprockets



Taper Bushed Type TL

ISO 20B, DIN 8187 - ISO/R 606

Standard and Hardened Teeth

Material: C45 E

Drawing Dimensions	Sprocket Sizes
	20B
h_1	18.5



Part No: 20B-17HTL-2517

20B = Chain Size

17 = Number of Teeth

H = Hardened Teeth

TL-2517 = TL Bushing Size

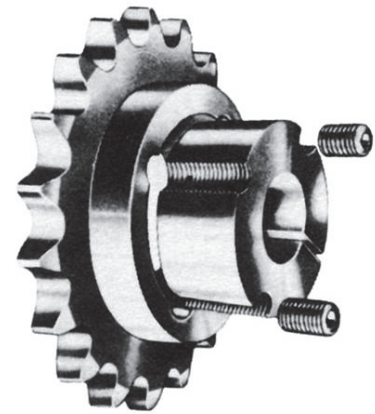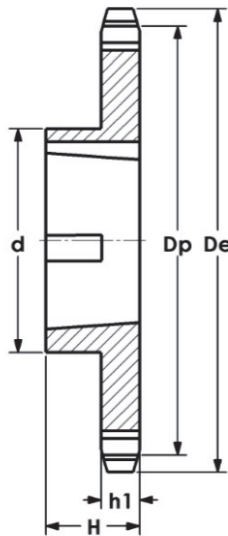

Models Available

Dimensions in mm

Chain Size 1-1/4" x 3/4"	Teeth	De	Dp	Single				Wt. kg
				Part No.	Type	d	H	
20B	13	147.8	132.65	20B-13TL-2012	1	90	32	1.4
	14	157.8	142.68	20B-14TL-2012	1	90	32	1.9
	15	167.9	152.72	20B-15HTL-2517	1	108	45	2.5
	16	177.9	162.75	20B-16TL-2517	1	108	45	2.8
	17	187.9	172.78	20B-17HTL-2517	1	108	45	3.3
	18	198.0	182.85	20B-18TL-2517	1	108	45	3.5
	19	208.1	192.91	20B-19HTL-2517	1	108	45	4.0
	20	218.1	202.98	20B-20TL-2517	1	108	45	4.3
	21	228.2	213.04	20B-21HTL-2517	1	108	45	5.0
	22	238.3	223.11	20B-22TL-2517	1	108	45	5.5
	23	248.3	233.17	20B-23HTL-2517	1	108	45	6.0
	24	258.4	243.23	20B-24TL-2517	1	108	45	6.5
	25	268.5	253.33	20B-25HTL-2517	1	108	45	7.2
	27	288.6	273.40	20B-27TL-3020	1	150	51	9.0
	30	318.9	303.75	20B-30TL-3020	1	150	51	11.0
	38	399.6	384.49	20B-38TL-3020	1	160	51	17.5
	45	470.3	455.17	20B-45TL-3020	1	160	51	24.5
	57	591.5	576.36	20B-57TL-3020	1	160	51	38.0
	76	783.5	768.32	20B-76TL-3020	1	160	51	67.0

Note: Shaded items with "H" in Part No. indicates Hardened Teeth.