

# SPC Metric V-Belt Sheaves - Taper Bushed



Models Available




Fig 1

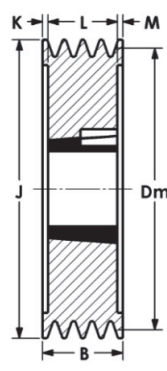


Fig 4

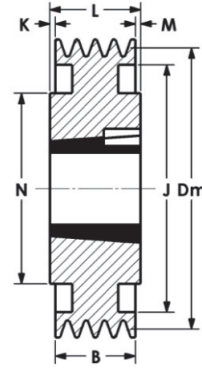


Fig 5

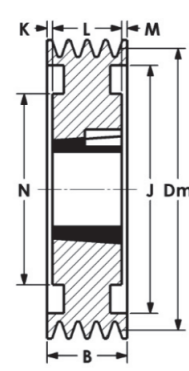


Fig 6

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPC280 x 3-3535*	280	3	3535	90	1	85	230	—	89	4	178	24.0
SPC280 x 4-3535*		4	3535	90	6	110.5	230	10.8	89	10.8	178	29.0
SPC280 x 5-3535*		5	3535	90	6	136	230	23.5	89	23.5	178	31.0
SPC280 x 6-3535*		6	3535	90	6	161.5	230	36.3	89	36.3	178	33.8
SPC280 x 8-3535*		8	3535	90	6	212.5	230	61.8	89	61.8	178	37.5
SPC280 x 10-4545		10	4545	100	6	264	230	81	105	81	—	40.0
SPC300 x 3-3535*	300	3	3535	90	5	85	250	2	89	2	178	21.0
SPC300 x 4-3535*		4	3535	90	6	110.5	250	10.8	89	10.8	178	25.0
SPC300 x 5-3535*		5	3535	90	6	136	250	23.5	89	23.5	178	28.5
SPC300 x 6-3535*		6	3535	90	6	161.5	250	36.3	89	36.3	178	29.0
SPC300 x 8-4040		8	4040	100	4	212.5	250	55.3	102	55.3	—	46.5
SPC300 x 10-4545		10	4545	100	6	264	250	75	115	75	—	65.0
SPC315 x 3-3535*	315	3	3535	90	5	85	265	2	89	2	178	21.6
SPC315 x 4-3535*		4	3535	90	6	110.5	265	10.8	89	10.8	178	24.6
SPC315 x 5-3535*		5	3535	90	6	136	265	23.5	89	23.5	178	29.0
SPC315 x 6-3535*		6	3535	90	6	161.5	265	36.3	89	36.3	178	31.4
SPC315 x 8-4040		8	4040	100	4	212.5	265	55.3	102	55.3	200	50.0
SPC315 x 10-4545		10	4545	100	6	264	265	75	115	75	—	78.0
SPC335 x 3-3535*	335	3	3535	90	5	85	282	2	89	2	178	22.5
SPC335 x 4-3535*		4	3535	90	6	110.5	282	10.8	89	10.8	178	26.5
SPC335 x 5-3535*		5	3535	90	6	136	282	23.5	89	23.5	178	30.0
SPC335 x 6-3535*		6	3535	90	6	161.5	282	36.3	89	36.3	178	35.0
SPC335 x 8-4040		8	4040	100	6	212.5	282	55.3	102	55.3	200	58.0
SPC335 x 10-4545		10	4545	100	6	264	282	75	115	75	—	85.0
SPC355 x 3-3535*	355	3	3535	90	5	85	305	2	89	2	178	22.9
SPC355 x 4-3535*		4	3535	90	6	110.5	305	10.8	89	10.8	178	28.3
SPC355 x 5-3535*		5	3535	90	6	136	305	23.5	89	23.5	178	32.5
SPC355 x 6-3535*		6	3535	90	6	161.5	305	36.3	89	36.3	178	36.0
SPC355 x 8-4040		8	4040	100	6	212.5	305	55.3	102	55.3	200	67.5
SPC355 x 10-4545		10	4545	100	6	264	305	75	115	75	—	88.0
SPC375 x 3-3535*	375	3	3535	90	5	85	322	2	89	2	178	23.8
SPC375 x 4-3535*		4	3535	90	6	110.5	322	10.8	89	10.8	178	30.0
SPC375 x 5-3535*		5	3535	90	6	136	322	23.5	89	23.5	178	33.0
SPC375 x 6-4040		6	4040	100	6	161.5	322	29.8	102	29.8	216	45.5
SPC375 x 8-4545		8	4545	110	6	212.5	322	48.8	115	48.8	225	68.0
SPC375 x 10-5050		10	5050	100	6	264	322	75	115	75	—	92.0

Note: \* Requires bushing with BSW threads.