

# SPC Metric V-Belt Sheaves - Taper Bushed



Models Available

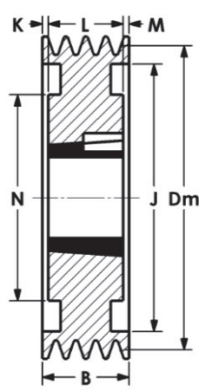


Fig 6

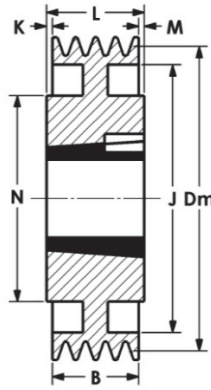


Fig 7

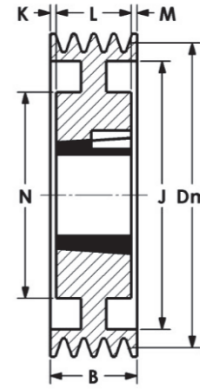


Fig 8

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPC400 x 3-3535*	400	3	3535	90	7	85	350	2	89	2	178	24.1
SPC400 x 4-3535*		4	3535	90	8	110.5	350	10.8	89	10.8	178	28.0
SPC400 x 5-3535*		5	3535	90	8	136	350	23.5	89	23.5	178	34.0
SPC400 x 6-4040		6	4040	100	6	161.5	350	29.8	102	29.8	216	48.0
SPC400 x 8-4545		8	4545	110	6	212.5	350	48.8	115	48.8	240	65.0
SPC425 x 3-3535*	425	3	3535	90	7	85	372	2	89	2	178	26.0
SPC425 x 4-3535*		4	3535	90	8	110.5	372	10.8	89	10.8	178	31.0
SPC425 x 5-4040		5	4040	100	6	136	372	17	102	17	216	45.0
SPC425 x 6-4545		6	4545	110	6	161.5	372	23.3	115	23.3	242	58.0
SPC425 x 8-4545		8	4545	110	6	212.5	372	42.8	127	42.8	265	74.0
SPC425 x 10-5050	10	5050	110	6	264	372	68.5	127	68.5	265	105.0	
SPC450 x 3-3535*	450	3	3535	90	7	85	400	2	89	2	178	28.6
SPC450 x 4-3535*		4	3535	90	8	110.5	400	10.8	89	10.8	178	33.5
SPC450 x 5-4040		5	4040	100	8	136	400	17	102	17	216	45.0
SPC450 x 6-4545		6	4545	110	6	161.5	400	23.3	115	23.3	242	61.1
SPC450 x 8-5050		8	5050	125	6	212.5	400	42.8	127	42.8	265	78.7
SPC450 x 10-5050	10	5050	125	6	264	400	68.5	127	68.5	265	109.0	
SPC475 x 3-3535*	475	3	3535	90	7	85	422	2	89	2	178	40.0
SPC475 x 4-3535*		4	3535	90	8	110.5	422	10.8	89	10.8	178	47.0
SPC475 x 5-4040		5	4040	100	8	136	422	17	102	17	216	47.2
SPC475 x 6-4545		6	4545	110	6	161.5	422	23.3	115	23.3	242	62.8
SPC475 x 8-5050		8	5050	125	6	212.5	422	42.8	127	42.8	265	81.5
SPC475 x 10-5050	10	5050	125	6	264	422	68.5	127	68.5	265	125.0	
SPC500 x 3-3535*	500	3	3535	90	7	85	450	2	89	2	178	30.9
SPC500 x 4-3535*		4	3535	90	8	110.5	450	10.8	89	10.8	178	39.0
SPC500 x 5-4040		5	4040	100	8	136	450	17	102	17	216	48.7
SPC500 x 6-4545		6	4545	110	8	161.5	450	23.3	115	23.3	242	60.2
SPC500 x 8-5050		8	5050	125	6	212.5	450	42.8	127	42.8	265	87.4
SPC500 x 10-5050	10	5050	125	6	264	450	68.5	127	68.5	265	132.0	
SPC530 x 3-3535*	530	3	3535	90	7	85	480	2	89	2	178	35.0
SPC530 x 4-4040		4	4040	100	8	110.5	480	4.3	102	4.3	216	40.0
SPC530 x 5-4545		5	4545	110	8	136	480	11	115	11	242	60.0
SPC530 x 6-5050		6	5050	125	8	161.5	480	17.3	127	17.3	265	73.0
SPC530 x 8-5050		8	5050	125	6	212.5	480	42.8	127	42.8	265	94.0
SPC530 x 10-5050	10	5050	125	6	264	480	68.5	127	68.5	265	145.0	
SPC560 x 3-3535*	560	3	3535	90	7	85	510	2	89	2	178	36.0
SPC560 x 4-4040		4	4040	100	8	110.5	510	4.3	102	4.3	216	50.0
SPC560 x 5-4545		5	4545	110	8	136	510	11	115	11	242	63.0
SPC560 x 6-5050		6	5050	125	8	161.5	510	17.3	127	17.3	265	77.0
SPC560 x 8-5050		8	5050	125	8	212.5	510	42.8	127	42.8	265	94.0
SPC560 x 10-5050	10	5050	125	6	264	510	68.5	127	68.5	265	150.0	

Note: \* Requires bushing with BSW threads.