

SPZ Metric V-Belt Sheaves - Taper Bushed



Models Available




Fig 1



Fig 2

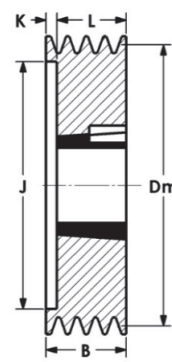


Fig 3

Dimensions in mm

Part No.	Dm	Groove	Bushing	Max Bore	Figure	B	J	K	L	M	N	Wt. kg
SPZ100 x 1-1210	100	1	1210	32	1	16	—	—	25	9	83	0.8
SPZ100 x 2-1610		2	1610	42	3	28	71	3	25	—	—	0.9
SPZ100 x 3-1610		3	1610	42	3	40	71	15	25	—	—	1.1
SPZ100 x 4-1610		4	1610	42	3	52	71	27	25	—	—	1.1
SPZ100 x 5-2012		5	2012	50	3	64	71	32	32	—	—	1.3
SPZ100 x 6-2012		6	2012	50	3	76	71	44	32	—	—	1.4
SPZ106 x 1-1610	106	1	1610	42	1	16	—	—	25	9	83	0.9
SPZ106 x 2-1610		2	1610	42	3	28	—	—	28	—	—	1.1
SPZ106 x 3-1610		3	1610	42	3	40	77	15	25	—	—	1.3
SPZ106 x 4-1610		4	1610	42	3	52	77	27	25	—	—	1.3
SPZ106 x 5-2012		5	2012	50	3	64	77	32	32	—	—	1.5
SPZ106 x 6-2012		6	2012	50	3	76	77	44	32	—	—	1.6
SPZ112 x 1-1610	112	1	1610	42	1	16	—	—	25	9	92	1.0
SPZ112 x 2-1610		2	1610	42	3	28	83	3	25	—	—	1.3
SPZ112 x 3-2012		3	2012	50	3	40	83	8	32	—	—	1.3
SPZ112 x 4-2012		4	2012	50	3	52	83	20	32	—	—	1.5
SPZ112 x 5-2012		5	2012	50	3	64	83	32	32	—	—	1.8
SPZ112 x 6-2012		6	2012	50	3	76	83	44	32	—	—	1.9
SPZ118 x 1-1610	118	1	1610	42	1	16	—	—	25	9	92	0.9
SPZ118 x 2-1610		2	1610	42	3	28	89	3	25	—	—	1.3
SPZ118 x 3-2012		3	2012	50	3	40	89	8	32	—	—	1.6
SPZ118 x 4-2012		4	2012	50	3	52	89	20	32	—	—	1.8
SPZ118 x 5-2012		5	2012	50	3	64	89	32	32	—	—	1.8
SPZ118 x 6-2517*		6	2517	65	3	76	89	31	45	—	—	2.0
SPZ125 x 1-1610	125	1	1610	42	1	16	—	—	25	9	92	1.0
SPZ125 x 2-1610		2	1610	42	3	28	96	3	25	—	—	1.4
SPZ125 x 3-2012		3	2012	50	2	40	96	—	32	8	—	1.8
SPZ125 x 4-2012		4	2012	50	2	52	96	—	32	20	—	2.2
SPZ125 x 5-2012		5	2012	50	3	64	96	32	32	—	—	2.3
SPZ125 x 6-2517*		6	2517	65	3	76	96	31	45	—	—	2.5
SPZ132 x 1-1610	132	1	1610	42	1	16	—	—	25	9	92	1.1
SPZ132 x 2-1610		2	1610	42	3	28	111	3	25	—	—	1.5
SPZ132 x 3-2012		3	2012	50	2	40	111	—	32	8	—	2.3
SPZ132 x 4-2012		4	2012	50	2	52	111	—	32	20	—	2.5
SPZ132 x 5-2517*		5	2517	65	3	64	111	19	45	—	—	2.7
SPZ132 x 6-2517*		6	2517	65	3	76	111	31	45	—	—	2.9

Note: * Requires bushing with BSW threads.