



Hub City™ CleanLine™ Gear Drives

SHAFT KITS

SS HERA® GEAR DRIVE ACCESSORIES

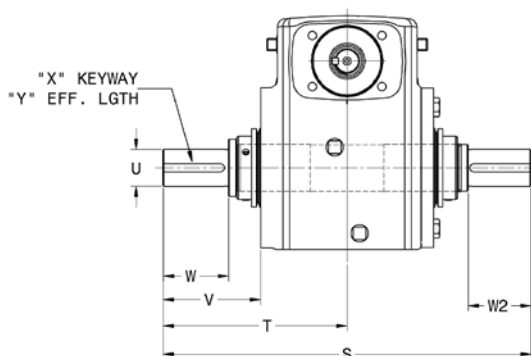

Double Extended

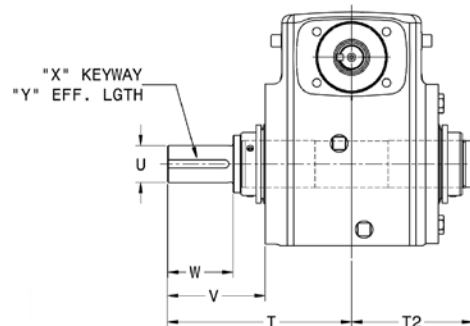

Single Extended

Note: Single Extended Kit can be installed from either side.

PLUG-IN SHAFT KITS

Series	Size Ref.	Double Ext Kit No.	Single Ext Kit No.	S	T	T2	U	V	W	W2	X	Y	Key(s) Furnished	WT. LBS.
SSHERA35	18	0259-00235	0259-00236	8.62	4.31	3.22	0.875	1.93	1.13	1.09	3/16 x 3/32	0.88	3/16 SQ X 7/8	4.1
	21	0259-00237	0259-00238	9.38	4.69	3.22	1.000	2.31	1.51	1.47	1/4 X 1/8	1.25	1/4 SQ X 1-1/4	4.2
	24	0259-00239	0259-00240	10.28	5.14	3.22	1.125	2.76	1.96	1.92	1/4 X 1/8	1.75	1/4 SQ X 1-1/2	4.4
SSHERA45	24	0259-00241	0259-00242	10.28	5.14	3.70	1.125	2.50	1.52	1.44	1/4 X 1/8	1.31	1/4 SQ X 1-1/4	4.7
	26	0259-00243	0259-00244	11.25	5.63	3.70	1.125	2.99	2.00	1.93	1/4 X 1/8	1.75	1/4 SQ X 1-1/2	4.8
	30	0259-00245	0259-00246	13.50	6.75	3.70	1.250	4.11	3.13	3.05	1/4 X 1/8	2.25	1/4 SQ X 2-1/4	5.4
	32	0259-00247	0259-00248	14.12	7.06	3.70	1.375	4.42	3.44	3.39	5/16 X 5/32	2.50	5/16 SQ X 2-3/8	5.8

Note: All Plug-In Shaft Kits Require a Stock Output Sleeve Bore of 1.438" for all SSHERA models.




BUSHING KITS

BRONZE OUTPUT BUSHING KITS

Bronze output bushing kits provide a means to adapt the stock bore hollow bore diameter to the most popular shaft diameters on driven equipment. Quick and easy installation. Bushing kits fit the stainless steel HERA® and the stainless steel worm gear drives.

Note: 1.438" stock bore required. Bushing kits include one drive bushing (keyed), one support bushing (non-keyed), keys and set screws for mounting.

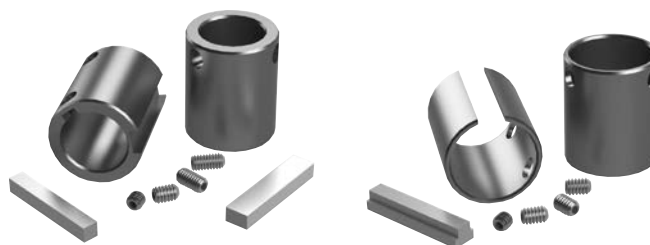

Bronze Output Bushing Kits

SERIES	BUSHING KIT NUMBER	BORE SIZE	BUSHING LENGTH	DRIVEN SHAFT KEYWAY
SSHERA35 & SSHERA45	0259-00256	1.000	(2) @ 2.00" ea.	3/16 x 3/32
SSHERA35 & SSHERA45	0259-00257	1.250	(2) @ 2.00" ea.	1/4 x 1/8

MARATHON® POWERWASH SXT MOTOR

Featuring:

- All stainless steel, totally enclosed
- 300 Series stainless steel external construction: frame, endshields, conduit box, mounting base and hardware for superior corrosion resistance
- 100% paint-free construction
- Nameplate information laser etched on frame
- UL Recognized, CSA Certified and CE Mark



Three Phase 1800 RPM C-Face Footless

HP	FRAME	CAT. NO.	WEIGHT
1/3	56C	N430	30
1/2	56C	N431	33
3/4	56C	N432	38
1	56C	N433A	55
1	143TC	N434B	55
1 1/2	56C	N435A	56
1 1/2	145TC	N436A	56
2	56C	N437A	59
2	145TC	N438B	59

Catalog numbers in **BOLD BLUE** have efficiency levels that meet EISA requirements.