


Inch Cam Follower Bearings **McGILL®**

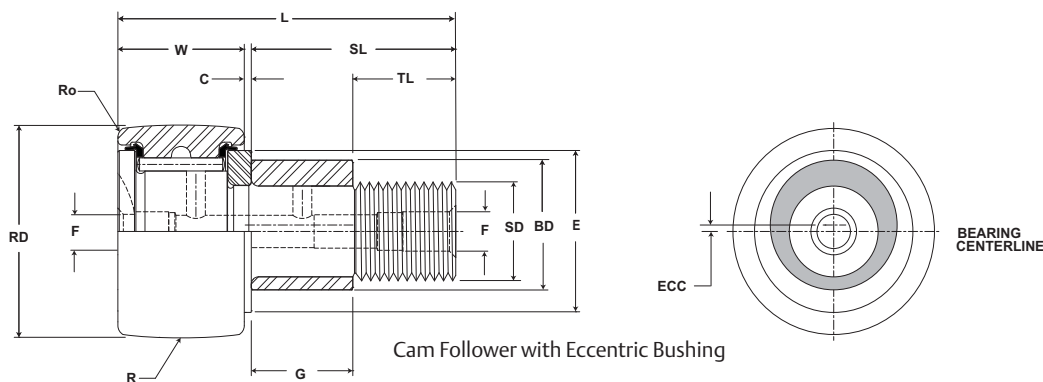

CF, CFE, CFE

Part No.		HC	HD	F	E	Ro	HBD		Thread Type	Clamping Torque	Limiting Speed (Grease)	WT
W/O Seals	With LUBRI-DISC Seals	Hole Center	Radial Hole Diameter	Axial Hole Dia or Fitting	Min Boss Diameter	Outer Corner	Housing Bore Diameter					Bearing Weight
		inch mm			inch mm		inch mm			lb kg		
		(Ref)	(Ref)	(Ref)	(Ref)	(Ref)	Nom.	Tol.				
CF 5/8	CF 5/8 S	-	-	.125 3.175	.462 11.73	.016 .40	.2503 6.358	+.0002/- .0003 +.0005/- .0008	1/4-28	35 4	9,200	.05 .02
CF 5/8 B	CF 5/8 SB											
CCF 5/8	CCF 5/8 S					N/A						
CCF 5/8 B	CCF 5/8 SB											
CFE 5/8	CFE 5/8 S	-	-	.125 3.175	.462 11.73	.016 .40	.378 9.60	+.001/- .001 +.025/- .025	1/4-28	35 4	9,200	.05 .02
CFE 5/8 B	CFE 5/8 SB											
CCFE 5/8	CCFE 5/8 S					N/A						
CCFE 5/8 B	CCFE 5/8 SB											
CFH 5/8	CFH 5/8 S	-	-	.125 3.175	.462 11.73	.016 .40	.3128 7.945	+.0002/- .0003 +.0005/- .0008	5/16-24	90 10	9,200	.05 .02
CFH 5/8 B	CFH 5/8 SB											
CCFH 5/8	CCFH 5/8 S					N/A						
CCFH 5/8 B	CCFH 5/8 SB											
CF 5/8 N	CF 5/8 N S	-	-	.125 3.175	.462 11.73	.016 .40	.2503 6.358	+.0002/- .0003 +.0005/- .0008	1/4-28	35 4	9,200	.05 .02
CF 5/8 N B	CF 5/8 N SB											
CCF 5/8 N	CCF 5/8 N S					N/A						
CCF 5/8 N B	CCF 5/8 N SB											
CCFE 5/8 N	CCFE 5/8 N SB											
CF 11/16	CF 11/16 S	-	-	.125 3.175	.462 11.73	.016 .40	.2503 6.358	+.0002/- .0003 +.0005/- .0008	1/4-28	35 4	8,300	.06 .03
CF 11/16 B	CF 11/16 SB											
CCF 11/16	CCF 11/16 S					N/A						
CCF 11/16 B	CCF 11/16 SB											
CFE 11/16	CFE 11/16 S	-	-	.125 3.175	.462 11.73	.016 .40	.378 9.60	+.001/- .001 +.025/- .025	1/4-28	35 4	8,300	.06 .03
CFE 11/16 B	CFE 11/16 SB											
CCFE 11/16	CCFE 11/16 S					N/A						
CCFE 11/16 B	CCFE 11/16 SB											
CFH 11/16	CFH 11/16 S	-	-	.125 3.175	.462 11.73	.016 .40	.3128 7.945	+.0002/- .0003 +.0005/- .0008	5/16-24	90 10	8,300	.06 .03
CFH 11/16 B	CFH 11/16 SB											
CCFH 11/16	CCFH 11/16 S					N/A						
CCFH 11/16 B	CCFH 11/16 SB											

For positive clamping, use housing thickness equal to G dimension $\pm .010$ ".
Clamping torque is based on dry threads. If threads are lubricated, use half of value shown.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-156.