


McGILL® Inch Cam Follower Bearings



- Basic Construction Type:** Stud Type Crowned / Cylindrical Outside Diameter
- Rolling Elements:** Full Complement Needle Roller
- Bearing Material:** Bearing Quality Steel
- Seal Type:** LUBRI-DISC®
- Lubrication:** Lithium Soap Grease NLGI #2
- System Configuration:** Concentric / Eccentric / Heavy Stud
- Mounting Feature:** Slot / Hex Hole

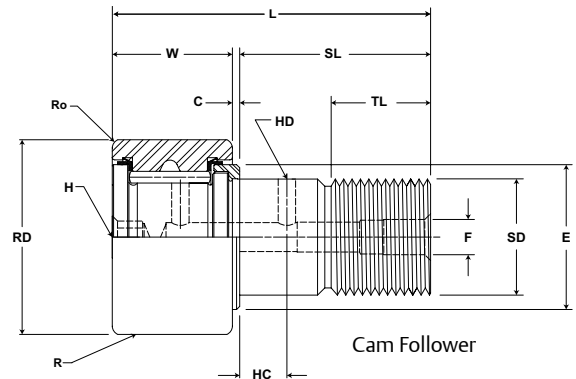

CF, CFE, CFH


Part No.		RD		W		SD		SL	C	TL	L	R	ECC	G	BD	Track Roller Dynamic Rating	Track Roller Static Rating
W/O Seals	With LUBRI-DISC Seals	Roller Diameter		Roller Width		Stud Diameter		Stud Length	Endplate Extension	Min Thread Length	Length Overall	Crown	Eccentric				
		Prefix CCF-XX		Base Modifier CFE-XX													
		inch mm		inch mm		inch mm		inch mm		inch mm		inch mm					
		Nom.	Tol.	Nom.	Tol.	Nom.	Tol.	(Ref)	(Ref)	(Ref)	(Ref)	Radius (Ref)	(Ref)	+0/- .010	±.001	lb/N	
CF 3 1/2	CF 3 1/2 S											Cylindrical				22,800 101,414	31,625 140,668
CF 3 1/2 B	CF 3 1/2 SB	3.500 88.90	+0/- .001 +0/- .03	2.000 50.80	+0 / - .005 +0 / - .13	1.375 34.93	+ .001/-0 + .03/-0	2.75 69.9	.031 .8	1.375 34.93	4.78 121.4		N/A	N/A	N/A		
CCF 3 1/2	CCF 3 1/2 S											30 762					
CCF 3 1/2 B	CCF 3 1/2 SB																
CFE 3 1/2	CFE 3 1/2 S											Cylindrical				22,800 101,414	31,625 140,668
CFE 3 1/2 B	CFE 3 1/2 SB	3.500 88.90	+0/- .001 +0/- .03	2.000 50.80	+0 / - .005 +0 / - .13	1.375 34.93	+ .001/-0 + .03/-0	2.75 69.9	.031 .8	1.375 34.93	4.78 121.4		.060 .52	1.375 34.93	1.812 46.02		
CCFE 3 1/2	CCFE 3 1/2 S											30 762					
CCFE 3 1/2 B	CCFE 3 1/2 SB																
CFH 3 1/2	CFH 3 1/2 S											Cylindrical				22,800 101,414	63,250 281,336
CFH 3 1/2 B	CFH 3 1/2 SB	3.500 88.90	+0/- .001 +0/- .03	2.000 50.80	+0 / - .005 +0 / - .13	1.750 44.45	+ .001/-0 + .03/-0	2.75 69.9	.031 .8	1.375 34.93	4.78 121.4		N/A	N/A	N/A		
CCFH 3 1/2	CCFH 3 1/2 S											30 762					
CCFH 3 1/2 B	CCFH 3 1/2 SB																
CF 4	CF 4 S											Cylindrical				22,800 101,414	44,770 199,137
CF 4 B	CF 4 SB	4.000 101.60	+0/- .001 +0/- .03	2.250 57.15	+0 / - .005 +0 / - .13	1.500 38.10	+ .001/-0 + .03/-0	3.50 88.9	.031 .8	1.50 38.1	5.78 146.8		N/A	N/A	N/A		
CCF 4	CCF 4 S											30 762					
CCF 4 B	CCF 4 SB																
CFE 4	CFE 4 S											Cylindrical				22,800 101,414	44,770 199,137
CFE 4 B	CFE 4 SB	4.000 101.60	+0/- .001 +0/- .03	2.250 57.15	+0 / - .005 +0 / - .13	1.500 38.10	+ .001/-0 + .03/-0	3.50 88.9	.031 .8	1.50 38.1	5.78 146.8		.060 .52	2.000 50.80	2.000 50.80		
CCFE 4	CCFE 4 S											30 762					
CCFE 4 B	CCFE 4 SB																
CFH 4	CFH 4 S											Cylindrical				29,985 133,373	89,540 398,274
CFH 4 B	CFH 4 SB	4.000 101.60	+0/- .001 +0/- .03	2.250 57.15	+0 / - .005 +0 / - .13	2.000 50.80	+ .001/-0 + .03/-0	3.50 88.9	.031 .8	1.50 38.1	5.78 146.8		N/A	N/A	N/A		
CCFH 4	CCFH 4 S											30 762					
CCFH 4 B	CCFH 4 SB																

Metric dimensions for reference only.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-158.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.

Inch Cam Follower Bearings **MCGILL®**

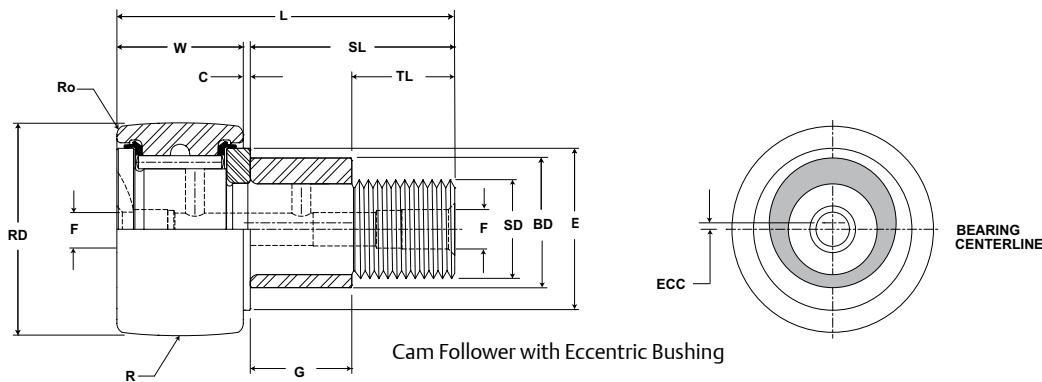

CF, CFE, CFH

Part No.		HC	HD	F	E	Ro	HBD		Thread Type	Clamping Torque	Limiting Speed (Grease)	WT				
W/O Seals	With LUBRI-DISC Seals	Hole Center	Radial Hole Diameter	Axial Hole Dia or Fitting	Min Boss Diameter	Outer Corner	Housing Bore Diameter					Bearing Weight				
		inch mm			inch mm		inch mm			lb kg						
		(Ref)	(Ref)	(Ref)	(Ref)	(Ref)	Nom.	Tol.								
CF 3 1/2	CF 3 1/2 S	.6875 17	.125 3	.25 * 6	2.438 61.91	.125 3.18	1.3753 34.933	+.0002/- .0003 +.0005/- .0008	1 3/8-12	4,200 475	820	6.42 2.91				
CF 3 1/2 B	CF 3 1/2 SB					N/A										
CCF 3 1/2	CCF 3 1/2 S					.125 3.18	1.815 46.10	+.001/- .001 +.025/- .025								
CCF 3 1/2 B	CCF 3 1/2 SB												N/A			
CFE 3 1/2	CFE 3 1/2 S	.6875 17	.125 3	.25 * 6	2.438 61.91	.125 3.18	1.7503 44.458	+.0002/- .0003 +.0005/- .0008					1 3/4-12	5,000 565	820	7.01 3.18
CFE 3 1/2 B	CFE 3 1/2 SB					N/A										
CCFE 3 1/2	CCFE 3 1/2 S					.125 3.18	2.002 50.85	+.001/- .001 +.025/- .025								
CCFE 3 1/2 B	CCFE 3 1/2 SB															
CFH 3 1/2	CFH 3 1/2 S	.6875 17	.125 3	.25 * 6	2.438 61.91	.125 3.18	1.5003 38.108	+.0002/- .0003 +.0005/- .0008	1 1/2-12	5,000 565	700	9.46 4.29				
CFH 3 1/2 B	CFH 3 1/2 SB					N/A										
CCFH 3 1/2	CCFH 3 1/2 S					.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CCFH 3 1/2 B	CCFH 3 1/2 SB															
CF 4	CF 4 S	.75 19	.125 3	.25 * 6	2.797 71.04	.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008					2-12	5,000 565	700	10.83 4.91
CF 4 B	CF 4 SB					N/A										
CCF 4	CCF 4 S					.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CCF 4 B	CCF 4 SB															
CFE 4	CFE 4 S	.75 19	.125 3	.25 * 6	2.797 71.04	.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CFE 4 B	CFE 4 SB					N/A										
CCFE 4	CCFE 4 S					.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CCFE 4 B	CCFE 4 SB								N/A							
CFH 4	CFH 4 S	.75 19	.125 3	.25 * 6	2.797 71.04	.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CFH 4 B	CFH 4 SB					N/A										
CCFH 4	CCFH 4 S					.125 3.18	2.0003 50.808	+.0002/- .0003 +.0005/- .0008								
CCFH 4 B	CCFH 4 SB								N/A							

* Lubrication hole (F) at bottom of hex hole and 1/4 inch straight drive fitting will ball check supplied but not installed.
For positive clamping, use housing thickness equal to G dimension $\pm .010$ ".
Clamping torque is based on dry threads. If threads are lubricated, use half of value shown.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-158.