


Inch Cam Follower Bearings **McGILL**

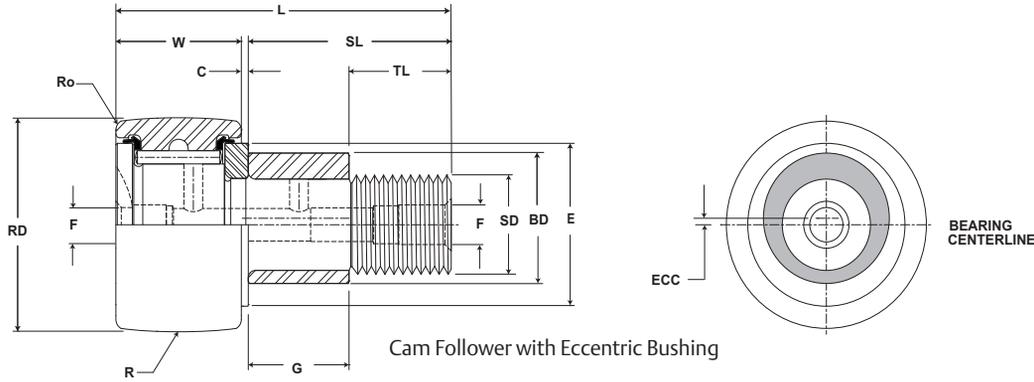

CF, CFE, CFH

Part No.		HC	HD	F	E	Ro	HBD		Thread Type	Clamping Torque	Limiting Speed (Grease)	WT	
W/O Seals	With LUBRI-DISC Seals	Hole Center	Radial Hole Diameter	Axial Hole Dia or Fitting	Min Boss Diameter	Outer Corner	Housing Bore Diameter						
		inch mm		inch mm		inch mm							
		(Ref)	(Ref)	(Ref)	(Ref)	Nom.	Tol.	in-lb Nm					RPM
-	CF 5 S	.875	.1875	1/4" NPT	3.563	.125	2.0003	+0.002/-0.003	2-12	5,000	565	575	19.60
	CCF 5 S	22	5		90.49	3.18	50.808	+0.005/-0.008					
	CFH 5 S	.875	.1875	1/4" NPT	3.563	.125	2.5030	+0.002/-0.003	2 1/2-12	5,000	565	575	22.10
	CCFH 5 S	22	5		90.49	3.18	63.576	+0.005/-0.008					
-	CF 6 S	1.00	.1875	1/4" NPT	4.469	.125	2.5030	+0.002/-0.003	2 1/2-12	5,000	565	475	32.73
	CCF 6 S	25	5		113.51	3.18	63.576	+0.005/-0.008					
	CFH 6 S	1.00	.1875	1/4" NPT	4.469	.125	3.0003	+0.002/-0.003	3-12	5,000	565	475	36.41
	CCFH 6 S	25	5		113.51	3.18	76.208	+0.005/-0.008					
-	CF 7 S	1.25	.1875	1/4" NPT	5.188	.125	3.0003	+0.002/-0.003	3-12	5,000	565	400	54.73
	CCF 7 S	32	5		131.76	3.18	76.208	+0.005/-0.008					
	CFH 7 S	1.25	.1875	1/4" NPT	5.188	.125	3.5003	+0.002/-0.003	3 1/2-4	5,000	565	400	68.03
	CCFH 7 S	32	5		131.76	3.18	88.908	+0.005/-0.008					
-	CF 8 S	-	-	1/4" NPT	4.375	.219	3.2503	+0.002/-0.003	3 1/4-4	5,000	565	350	79.80
	CCF 8 S	-	-		111.13	5.56	82.558	+0.005/-0.008					
-	CF 9 S	-	-	1/4" NPT	5.063	.250	3.7503	+0.002/-0.003	3 1/2-4	5,000	565	300	111.60
	CCF 9 S	-	-		128.59	6.35	95.258	+0.005/-0.008					
-	CF 10 S	-	-	1/4" NPT	5.469	.281	4.2503	+0.002/-0.003	3 1/2-4	5,000	565	275	148.20
	CCF 10 S	-	-		138.91	7.14	107.958	+0.005/-0.008					

For positive clamping, use housing thickness equal to G dimension = .010".
Clamping torque based on dry threads. For wet (lubricated) threads, use half of value shown.
Hex wrench size for "Broached" version is located in the wrench size chart on page B-156.