





**Duty:** Standard  
**Housing:** High Strength Composite Pillow Block  
**Self-Alignment:** +/- 2 Degrees  
**Lock:** Skwezloc Locking Collar  
**Seal:** HPS  
**Temperature:** 0° to 150°F  
**Grease:** Sealmaster GoldPlex-FG

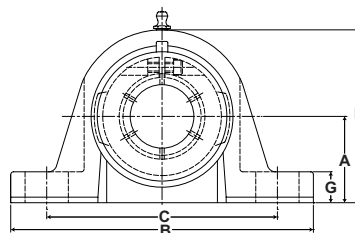

## CRPC-PN-T Series Pillow Block Skwezloc Locking Collar

| Bore Diameter |    | Part No.    | Bearing Insert No. | Basic Dynamic Rating lb/N | Dimensions inch/mm |                 |                  |                  |               |               |                 |                 |                |                 |                 |           | Unit Wt. lb/kg | Open Cap | Closed Cap |
|---------------|----|-------------|--------------------|---------------------------|--------------------|-----------------|------------------|------------------|---------------|---------------|-----------------|-----------------|----------------|-----------------|-----------------|-----------|----------------|----------|------------|
|               |    |             |                    |                           | A                  | B               | C                |                  | D             | G             | H               | J               | K              | L               | P               | Bolt Size |                |          |            |
| inch          | mm | Min.        | Max.               |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                |          |            |
| 3/4           | -  | CRPC-PN12T  | PN-12T             | 2611<br>11614             | 1 5/16             | 5               | 3 3/8            | 4 1/8            | 1 1/2         | 9/16          | 2 35/64         | 1 7/32          | 23/32          | 1 3/4           | 1 41/64         | 3/8       | .80<br>.36     | ECO-12   | ECC-12     |
| -             | 20 | CRPC-PN204T | PN-204T            |                           | 33.3               | 127.0           | 85.7             | 104.8            | 38.1          | 14.3          | 64.7            | 31.0            | 18.3           | 44.5            | 41.7            |           |                |          |            |
| 1             | -  | CRPC-PN16T  | PN-16T             | 2801<br>12459             | 1 7/16             | 5 1/2           | 3 3/4            | 4 1/2            | 1 1/2         | 9/16          | 2 13/16         | 1 3/8           | 13/16          | 1 15/16         | 1 47/64         | 3/8       | .83<br>.38     | ECO-16   | ECC-16     |
| -             | 25 | CRPC-PN205T | PN-205T            |                           | 36.5               | 139.7           | 95.3             | 114.3            | 38.1          | 14.3          | 71.4            | 34.9            | 20.6           | 49.2            | 44.1            |           |                |          |            |
| 1 3/16        | -  | CRPC-PN19T  | PN-19T             | 4381<br>19488             | 1 11/16<br>42.9    | 6 1/2<br>165.1  | 4 7/16<br>112.7  | 5 1/16<br>128.6  | 1 7/8<br>47.6 | 11/16<br>17.5 | 3 21/64<br>84.5 | 1 1/2<br>38.1   | 7/8<br>22.2    | 2 3/16<br>55.6  | 1 51/64<br>45.6 | 1/2       | 1.54<br>.70    | ECO-19   | ECC-19     |
| 1 1/4         | -  | CRPC-PN20RT | PN-20RT            |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                | ECO-20R  |            |
| -             | 30 | CRPC-PN206T | PN-206T            |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                | ECO-19   |            |
| 1 1/4         | -  | CRPC-PN20T  | PN-20T             | 5782<br>25720             | 1 7/8<br>47.6      | 6 9/16<br>166.7 | 4 11/16<br>119.1 | 5 5/16<br>134.9  | 1 7/8<br>47.6 | 11/16<br>17.5 | 3 3/4<br>95.3   | 1 11/16<br>42.9 | 1<br>25.4      | 2 7/16<br>61.9  | 1 59/64<br>48.8 | 1/2       | 1.97<br>.89    | ECO-20   | ECC-23     |
| 1 3/8         | -  | CRPC-PN22T  | PN-22T             | 5782<br>25720             | 1 7/8<br>47.6      | 6 9/16<br>166.7 | 4 11/16<br>119.1 | 5 5/16<br>134.9  | 1 7/8<br>47.6 | 11/16<br>17.5 | 3 3/4<br>95.3   | 1 11/16<br>42.9 | 1<br>25.4      | 2 9/16<br>65.1  | 1 59/64<br>48.8 | 1/2       | 1.97<br>.89    | ECO-23   | ECC-23     |
| 1 7/16        | -  | CRPC-PN23T  | PN-23T             |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                |          |            |
| -             | 35 | CRPC-PN207T | PN-207T            |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                |          |            |
| 1 1/2         | -  | CRPC-PN24T  | PN-24T             | 7340<br>32650             | 1 15/16<br>49.2    | 7 1/4<br>184.2  | 5 1/16<br>128.6  | 5 11/16<br>144.5 | 2 1/8<br>54.0 | 11/16<br>17.5 | 4 1/64<br>102.0 | 1 15/16<br>49.2 | 1 3/16<br>30.2 | 2 11/16<br>68.3 | 2 7/64<br>53.6  | 1/2       | 2.50<br>1.13   | ECO-24   | ECC-24     |
| -             | 40 | CRPC-PN208T | PN-208T            |                           |                    |                 |                  |                  |               |               |                 |                 |                |                 |                 |           |                |          |            |

Metric dimensions for reference only.

Not all parts are available from stock. Please contact customer service for availability (800) 626-2120.

For more information on bearing capabilities outside of our standard offering, please contact Application Engineering (800) 626-2093.