

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearings
Curves & tracks	Side guide solutions	Miscellaneous products	Related information

11290a

www.SystemPlastSmartGuide.com

882 BEVEL - 882 TAB


Sideflexing chains




Click here for related information.



882 BEVEL

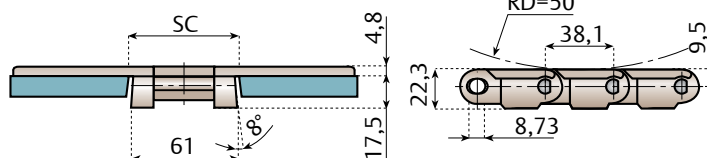


882 TAB

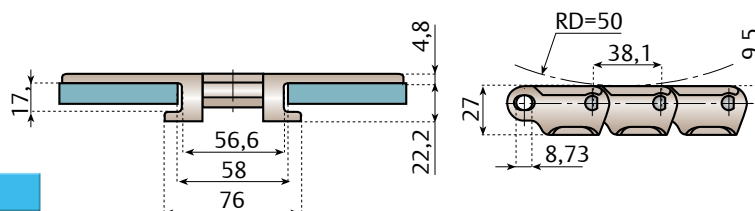

Nolu®-S curves

are strongly recommended with these chains!



Characteristics:

The 882 BEVEL and TAB types have a larger hinge geometry and because of a well balanced distribution of the material they have an excellent carrying load capacity.

Advantages: Heavy duty.

Pin material: Austenitic steel.



11300a

Item description	Material plate	Breaking load N	Width L		R min.	SC		Weight Kg/m
			mm	inch		Straight	Curving	
LF882-K450	LF Brown	10.000	114,3	4 ½	610	62	58	1,94
LF882-K750			190,5	7 ½				2,38
LF882-K1000			254,0	10				2,83
NG882-K450	NG Green	9.000	114,3	4 ½				1,94
NG882-K750			190,5	7 ½				2,38
NG882-K1000			254,0	10				2,83

Item description	Material plate	Breaking load N	Width L		R min.	SC		Weight Kg/m
			mm	inch		Straight	Curving	
LF882TAB-K450	LF Brown	10.000	114,3	4 ½	610	62	58	2,03
LF882TAB-K750			190,5	7 ½				2,46
LF882TAB-K1000			254,0	10				2,87
LF882TAB-K1200			304,8	12				3,41
NG882TAB-K450	NG Green	9.000	114,3	4 ½				2,03
NG882TAB-K750			190,5	7 ½				2,46
NG882TAB-K1000			254,0	10				2,87
NG882TAB-K1200			304,8	12				3,41

Standard length: 80 pitches (10 ft. - 3,048 m)

Breaking load according to standard ISO 4348 - DIN 8153