

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearings
Curves & tracks	Side guide solutions	Miscellaneous products	Related information






11370a

LBP 8257

www.SystemPlastSmartGuide.com

Heavy duty single hinge straight running chains with low noise accumulation rollers

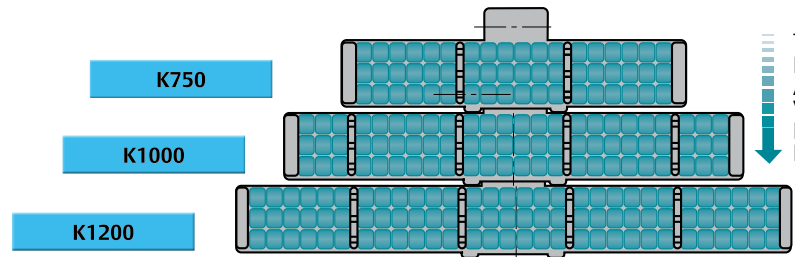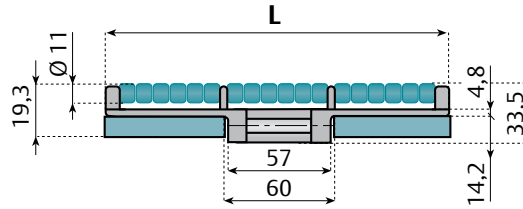

11300a



Item description	Material		Breaking load N	Width L		Weight Kg/m
	Plate	Roller		mm	inch	
LFG8257LBP-K750	LFG Dark Grey	Water blue	10.000	190,5	7 ½	5,65
LFG8257LBP-K1000				254,0	10	7,20
LFG8257LBP-K1200				304,8	12	8,10

Standard length: 40 pitches (5 ft. - 1,524 m)

Breaking load according to standard ISO 4348 - DIN 8153

LBP 821


Double hinge straight running chains with low noise accumulation rollers



Advantages:

- High breaking load
- Rollers manufactured in Low Friction and low noise material: reduced back-line pressure and low noise level

Pin material: Austenitic steel

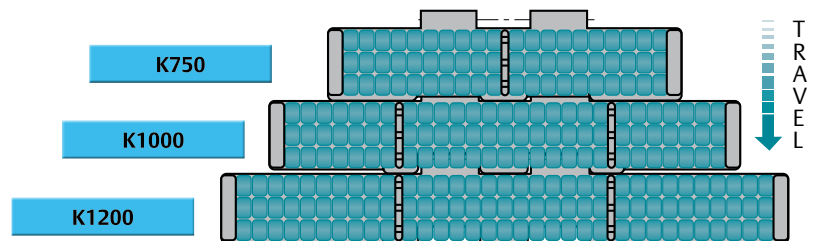

11320a

Item description	Material		Breaking load N	Width L		Weight Kg/m
	Plate	Roller		mm	inch	
LFG821LBP-K750	LFG Dark Grey	Water blue	8.300	190,5	7 ½	5,52
LFG821LBP-K1000				254,0	10	6,90
LFG821LBP-K1200				304,8	12	8,00

Standard length: 40 pitches (5 ft. - 1,524 m)

Breaking load according to standard ISO 4348 - DIN 8153