

Chains & sprockets	Wear strips	Side guide brackets & accessories	Levelers
Modular belts & sprockets	Chain & belt return systems	Frame & structure supports	Bearings
Curves & tracks	Side guide solutions	Miscellaneous products	Related information



1 1 3 5 0 a

LBP 879 M


www.SystemPlastSmartGuide.com

Sidefexing chains for magnetic system with low noise accumulation rollers

Click here for related information.

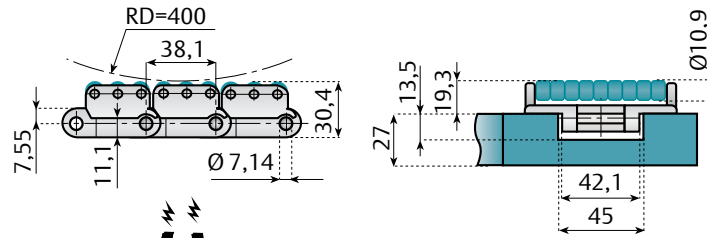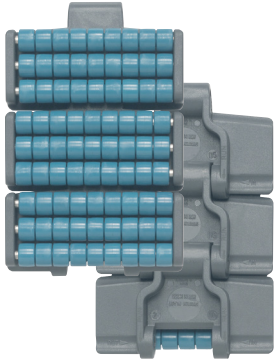

Nolu®-S curves
are strongly recommended
with these chains!



1 1 2 6 0 a



Item description	Material		Breaking load N	Width L		R min.	Weight Kg/m
	Plate	Roller		mm	inch		
LFG879LBP-M-K325	LFG Dark Grey	Water blue	5.700	82,5	3 ¼	500	2,30

Standard length: 40 pitches (5 ft. - 1,524 m)

Breaking load according to standard ISO 4348 - DIN 8153

LBP 878 TAB

Sidefexing chains with low noise accumulation rollers

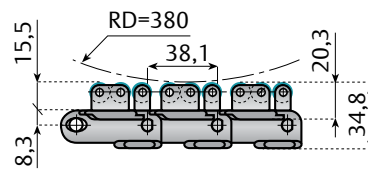
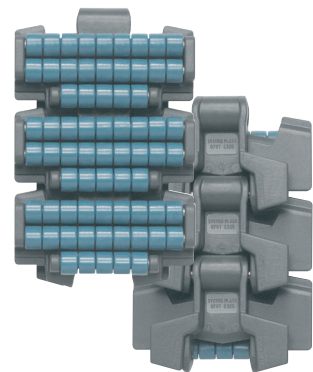


Nolu®-S curves
are strongly recommended
with these chains!

1 1 2 6 0 a

For see Drive Disk go to:

1 1 2 7 0 a



Item description	Material		Breaking load N	Width L		R min.	Weight Kg/m
	Plate	Roller		mm	inch		
LFG879LBP-TAB-K325	LFG Dark Grey	Water blue	6.000	82,5	3 ¼	200	3,20

Standard length: 40 pitches (5 ft. - 1,524 m)

Breaking load according to standard ISO 4348 - DIN 8153