


Chains & Sprockets	Wear Strips	Side Guide Brackets & Accessories	Levelers
Modular Belts & Sprockets	Chain & Belt Return Systems	Frame & Structure Supports	Bearings
Curves & Tracks	Side Guide Solutions	Miscellaneous Products	Related Information



60580a

www.SystemPlastSmartGuide.com

Wear Strips

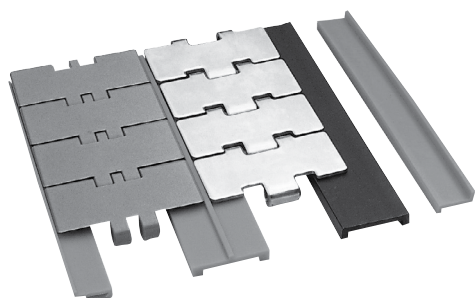

VALU
GUIDE

Application: These UHMW based extrusions are commonly used as wear strips underneath chains and belts. Various profiles and material types are available to suit a multitude of applications. The Nolu®-S material offers a lower coefficient of friction which provides a sustainable advantage over UHMW in wear bed applications.

Materials: UHMW-PE or Nolu®-S



Click here for related information.

	UHMW-PE White	Nolu®-S		
Item Description	Item Description			
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-JSL075-125-10	VG-JSL075-125-NS-10	-	10 ft
	VG-JSL075-125-20	VG-JSL075-125-NS-20	-	20 ft
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-P18CC-10	VG-P18CC-NS-10	-	10 ft
	VG-P18CC-20	VG-P18CC-NS-20	-	20 ft
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-JL081-188-10	VG-JL081-188-NS-10	-	10 ft
	VG-JL081-188-20	VG-JL081-188-NS-20	-	20 ft
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-JEL-078-125-10	VG-JEL-078-125-NS-10	-	10 ft
	VG-JEL-078-125-20	VG-JEL-078-125-NS-20	-	20 ft
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-J100-125T-10	VG-J100-125T-NS-10	-	10 ft
	VG-J100-125T-20	VG-J100-125T-NS-20	-	20 ft
	VG-J100-125T-100	VG-J100-125T-NS-100	100 ft	-
	VG-J100-125T-250	VG-J100-125T-NS-250	250 ft	-
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-J100-188-10	VG-J100-188-NS-10	-	10 ft
	VG-J100-188-20	VG-J100-188-NS-20	-	20 ft
	VG-J100-188-100	VG-J100-188-NS-100	100 ft	-
 Note: Holds tight onto 11 or 12 ga. sheet metal or 1/8" bar.	VG-P417CT-10	-	-	10 ft

Note: Inch dimensions shown.