




- Duty:** Standard
- Rolling Elements:** Ball
- Bearing Material:** 52100 Chrome Steel or 400 Series Stainless Steel
- Housing:** Black Polyamide
- Self-Alignment:** ± 1°
- Lock:** Setscrew
- Bearing Seal:** Single Lip Contact
- Back Seal:** Spring Seal
- End Cap:** Yellow Protective Cap
- Temperature:** 30° to 180°F (0° to 82°C)

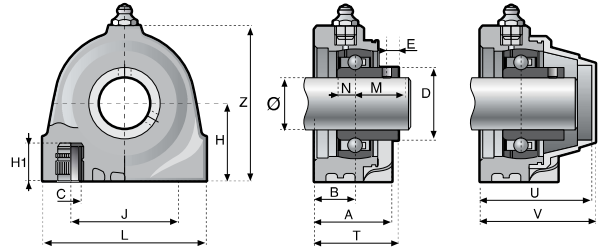

This UCPA style mounted bearing uses external fitting caps.

UCPA SERIES TAPPED BASE PILLOW BLOCK - POLYAMIDE - SETSCREW LOCKING - EXTERNAL FIT SAFETY CAP

BORE DIAMETER		52100 CHROME STEEL BEARING INSERT		
		OPTIONAL SAFETY CAP	SEALED CLOSED CAP	SEALED OPEN CAP
inch	mm	PART DESCRIPTION	PART DESCRIPTION	PART DESCRIPTION
3/4	-	UCPA204-12	UCPA204-12-CEC	UCPA204-12-OEC
-	20	UCPA204-20M	UCPA204-20M-CEC	UCPA204-20M-OEC
1	-	UCPA205-16	UCPA205-16-CEC	UCPA205-16-OEC
-	25	UCPA205-25M	UCPA205-25M-CEC	UCPA205-25M-OEC
1 3/16	-	UCPA206-19	UCPA206-19-CEC	UCPA206-19-OEC
1 1/4R	-	UCPA206-20	UCPA206-20-CEC	UCPA206-20-OEC
-	30	UCPA206-30M	UCPA206-30M-CEC	UCPA206-30M-OEC

Note: Bearing assembly supplied with a lubrication fitting installed in the housing with an optional plug in the box if relubrication is not required.

BORE DIAMETER		DIMENSIONS INCH / MM							
		A	B	C	D	E	H	H1	J
inch	mm								
3/4	-	1 1/4	11/16	3/8	1 1/8	7/32	1 5/16	5/8	2
-	20	32.0	17.5	3/8	28.4	5.3	33.3	16.0	50.8
1	-	1 27/64	49/64	3/8	1 11/32	7/32	1 7/16	5/8	2
-	25	36.1	19.6	3/8	34.0	5.3	36.6	16.0	50.8
1 3/16	-	1 9/16	25/32	7/16	1 9/16	15/64	1 11/16	15/16	3
1 1/4R	-	39.9	20.1	7/16	39.9	5.8	42.9	23.9	76.2

UCPA SERIES TAPPED BASE PILLOW BLOCK - POLYAMIDE - SETSCREW LOCKING - EXTERNAL FIT SAFETY CAP


BORE DIAMETER		STAINLESS STEEL BEARING INSERT		
		OPTIONAL SAFETY CAP	SEALED CLOSED CAP	SEALED OPEN CAP
inch	mm	PART DESCRIPTION	PART DESCRIPTION	PART DESCRIPTION
3/4	-	UCPA204-12-SS	UCPA204-12-SS-CEC	UCPA204-12-SS-OEC
-	20	UCPA204-20M-SS	UCPA204-20M-SS-CEC	UCPA204-20M-SS-OEC
1	-	UCPA205-16-SS	UCPA205-16-SS-CEC	UCPA205-16-SS-OEC
-	25	UCPA205-25M-SS	UCPA205-25M-SS-CEC	UCPA205-25M-SS-OEC
1 3/16	-	UCPA206-19-SS	UCPA206-19-SS-CEC	UCPA206-19-SS-OEC
1 1/4R	-	UCPA206-20-SS	UCPA206-20-SS-CEC	UCPA206-20-SS-OEC
-	30	UCPA206-30M-SS	UCPA206-30M-SS-CEC	UCPA206-30M-SS-OEC

BORE DIAMETER		DIMENSIONS INCH / MM										WEIGHT (lbs/kgs)
		L	M	M	N	N	T	T	U	V	Z	
inch	mm			STAINLESS		STAINLESS		STAINLESS				
3/4	-	2 3/4	23/32	23/32	9/32	19/64	1 13/32	1 13/32	1 15/16	2	2 9/16	0.79
-	20	70.1	18.3	18.3	7.1	7.6	35.8	35.8	49.0	51.1	65.0	0.36
1	-	2 61/64	49/64	25/32	19/64	19/64	1 17/32	1 35/64	2 1/8	2 3/16	2 53/64	0.90
-	25	74.9	19.6	19.8	7.6	7.6	39.1	39.4	54.1	55.9	71.9	0.41
1 3/16	-	3 55/64	7/8	7/8	5/16	11/32	1 41/64	1 21/32	2 5/16	2 13/32	3 11/32	1.23
1 1/4R	-											
-	30	98.0	22.1	22.1	7.9	8.9	41.9	42.2	58.9	61.0	85.1	0.56

MOUNTED BALL BEARING SUPPORTS



- Duty:** Standard
- Rolling Elements:** Ball
- Bearing Material:** 52100 Chrome Steel or 400 Series Stainless Steel
- Housing:** White Nolu®-Clean Housing
- Self-Alignment:** ± 1°
- Lock:** Setscrew
- Bearing Seal:** Single Lip Contact
- Back Seal:** Spring Seal
- End Cap:** White Protective Cap
- Temperature:** 30° to 180°F (0° to 82°C)

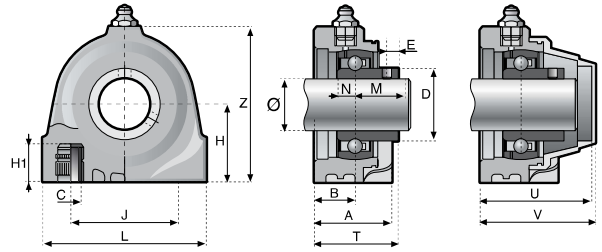

This UCPA style mounted bearing uses external fitting caps.

UCPA SERIES TAPPED BASE PILLOW BLOCK - NOLU-CLEAN HOUSING - SETSCREW LOCKING - EXTERNAL FIT SAFETY CAP

BORE DIAMETER		52100 CHROME STEEL BEARING INSERT		
		OPTIONAL SAFETY CAP	SEALED CLOSED CAP	SEALED OPEN CAP
inch	mm	PART DESCRIPTION	PART DESCRIPTION	PART DESCRIPTION
3/4	-	UCPA204-12-NC	UCPA204-12-NC-CEC	UCPA204-12-NC-OEC
-	20	UCPA204-20M-NC	UCPA204-20M-NC-CEC	UCPA204-20M-NC-OEC
1	-	UCPA205-16-NC	UCPA205-16-NC-CEC	UCPA205-16-NC-OEC
-	25	UCPA205-25M-NC	UCPA205-25M-NC-CEC	UCPA205-25M-NC-OEC
1 3/16	-	UCPA206-19-NC	UCPA206-19-NC-CEC	UCPA206-19-NC-OEC
1 1/4R	-	UCPA206-20-NC	UCPA206-20-NC-CEC	UCPA206-20-NC-OEC
-	30	UCPA206-30M-NC	UCPA206-30M-NC-CEC	UCPA206-30M-NC-OEC

Note: Bearing assembly supplied with a lubrication fitting installed in the housing with an optional plug in the box if relubrication is not required.

BORE DIAMETER		DIMENSIONS inch / mm							
		A	B	C	D	E	H	H1	J
inch	mm								
3/4	-	1 1/4	11/16	3/8	1 1/8	7/32	1 5/16	5/8	2
-	20	32.0	17.5	3/8	28.4	5.3	33.3	16.0	50.8
1	-	1 27/64	49/64	3/8	1 11/32	7/32	1 7/16	5/8	2
-	25	36.1	19.6	3/8	34.0	5.3	36.6	16.0	50.8
1 3/16	-	1 9/16	25/32	7/16	1 9/16	15/64	1 11/16	15/16	3
1 1/4R	-	39.9	20.1	7/16	39.9	5.8	42.9	23.9	76.2

UCPA SERIES TAPPED BASE PILLOW BLOCK - NOLU®-CLEAN HOUSING - SETSCREW LOCKING - EXTERNAL FIT SAFETY CAP

BORE DIAMETER		STAINLESS STEEL BEARING INSERT		
		OPTIONAL SAFETY CAP	SEALED CLOSED CAP	SEALED OPEN CAP
inch	mm	PART DESCRIPTION	PART DESCRIPTION	PART DESCRIPTION
3/4	-	UCPA204-12-SS-NC	UCPA204-12-SS-NC-CEC	UCPA204-12-SS-NC-OEC
-	20	UCPA204-20M-SS-NC	UCPA204-20M-SS-NC-CEC	UCPA204-20M-SS-NC-OEC
1	-	UCPA205-16-SS-NC	UCPA205-16-SS-NC-CEC	UCPA205-16-SS-NC-OEC
-	25	UCPA205-25M-SS-NC	UCPA205-25M-SS-NC-CEC	UCPA205-25M-SS-NC-OEC
1 3/16	-	UCPA206-19-SS-NC	UCPA206-19-SS-NC-CEC	UCPA206-19-SS-NC-OEC
1 1/4R	-	UCPA206-20-SS-NC	UCPA206-20-SS-NC-CEC	UCPA206-20-SS-NC-OEC
-	30	UCPA206-30M-SS-NC	UCPA206-30M-SS-NC-CEC	UCPA206-30M-SS-NC-OEC

BORE DIAMETER		DIMENSIONS inch / mm										WEIGHT (lbs/kgs)
		L	M	M	N	N	T	T	U	V	Z	
inch	mm			STAINLESS		STAINLESS		STAINLESS				
3/4	-	2 3/4	23/32	23/32	9/32	19/64	1 13/32	1 13/32	1 15/16	2	2 9/16	0.79
-	20	70.1	18.3	18.3	7.1	7.6	35.8	35.8	49.0	51.1	65.0	0.36
1	-	2 61/64	49/64	25/32	19/64	19/64	1 17/32	1 35/64	2 1/8	2 3/16	2 53/64	0.90
-	25	74.9	19.6	19.8	7.6	7.6	39.1	39.4	54.1	55.9	71.9	0.41
1 3/16	-	3 55/64	7/8	7/8	5/16	11/32	1 41/64	1 21/32	2 5/16	2 13/32	3 11/32	1.23
1 1/4R	-											
-	30	98.0	22.1	22.1	7.9	8.9	41.9	42.2	58.9	61.0	85.1	0.56