LOAD RATINGS				
RATING	lbf	Newtons		
RADIAL BASIC DYNAMIC	11,720	52,133		
MAXIMUM STATIC CAPACITY	32,900	146,346		

RECOMMENDED MOUNTING HOLE Ø				
Limit	Inch	mm		
MIN	1.2500	31.7500		
MAX	1.2505	31.7627		


MAXIMUM CLAMPING TORQUE**				
Thread Type	Inch lbf	Nm		
LUBRICATED	1,725	195		

## \_\_\_ NOTES:

BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE (UNLESS OTHERWISE SPECIFIED)
 ALL EXPOSED STEEL SURFACES HAVE BLACK OXIDE


MS NO.


- 3. CUSTOM LASER ETCHING UPON REQUEST
- 4. LIMITING SPEED:
- A. GREASE = 1,050 RPM

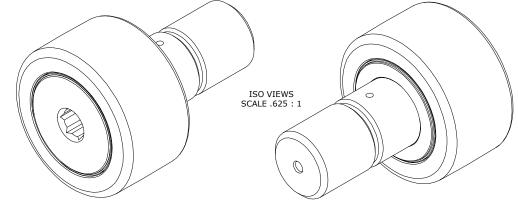

CCNBH-88-SB

DRAWING NO.

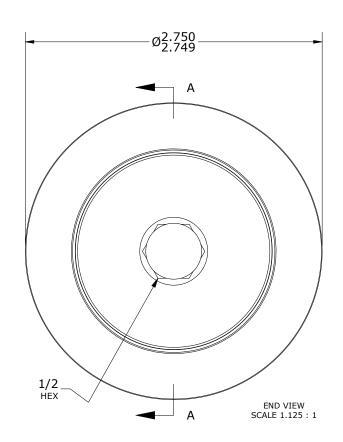

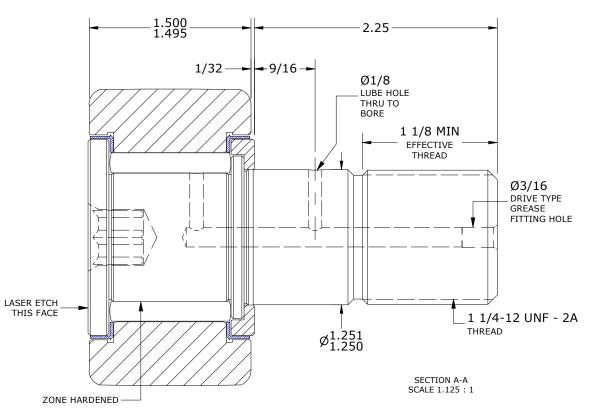

NSN NO.

\*\*TORQUE SPECIFICATION IS BASED ON LUBRICATED THREADS, IF USING DRY THREADS DOUBLE TORQUE VALUE

## MATERIAL NOTES:

OUTER RING - BEARING STEEL, HEAT TREATED STUD - BEARING STEEL, ZONE HARDENED NEEDLE ROLLER(S) - BEARING STEEL, HEAT TREATED WASHER - STEEL, HEAT TREATED SEAL(S) - SYNTHETIC

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 1'  CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS		CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417				
INCH [METRIC] FRACTION = ± 1/32	REVISION		PART NAME: ASSEMBLY		PRODUCT TY	PRODUCT TYPE: CNBH	
<u><b>E</b></u> NGINEERING <u><b>C</b></u> HA	ANGE <u>O</u> RDER NOTE	AUTHOR BY	DRAWN BY	CHK'D BY	SALES	MATERIAL	
		В	HG	EMD	MD	NC	NOTED
		REVISON BY	DATE	DATE	DATE	DATE	SHEET
		SGW	2/15/2021	7/11/2006	2/15/2021	2/16/2021	1 OF 2