PRODUCT INFORMATION PACKET



Model No: CZ4T17TC1C Catalog No: 103413.00

1/2HP..1800RPM.S56.TENV.230/460V.3PH.60HZ.CONT.NOT.40C.1.15SF.C-Face.Extreme Duck.

Encapsulated



Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Output HP	0.50 Hp	Output KW	0.37 kW
Frequency	60 Hz	Voltage	208-230/460 V
Current	1.9-1.8/0.90 A	Speed	1725 rpm
Service Factor	1.15	Phase	3
Efficiency	76 %	Duty	Continuous
Insulation Class	F	Design Code	В
KVA Code	К	Frame	S56C
Enclosure	Totally Enclosed Non Ventilated	Overload Protector	No
Ambient Temperature	40 °C	Drive End Bearing Size	6204
Opp Drive End Bearing Size	6204	UL	Recognized
CSA	Υ	CE	Υ
IP Code	69		

Technical Specifications


Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Mounting	Round	Motor Orientation	HORIZONTAL
Drive End Bearing	BALL	Opp Drive End Bearing	BALL
Frame Material	Stainless Steel	Shaft Type	NEMA 56
Overall Length	11.49 in	Frame Length	6.75 in
Shaft Diameter	0.625 in	Shaft Extension	1.88 in
Assembly/Box Mounting	F1 ONLY		
Outline Drawing	031980-675	Connection Diagram	005010.52


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created: 10/15/2018

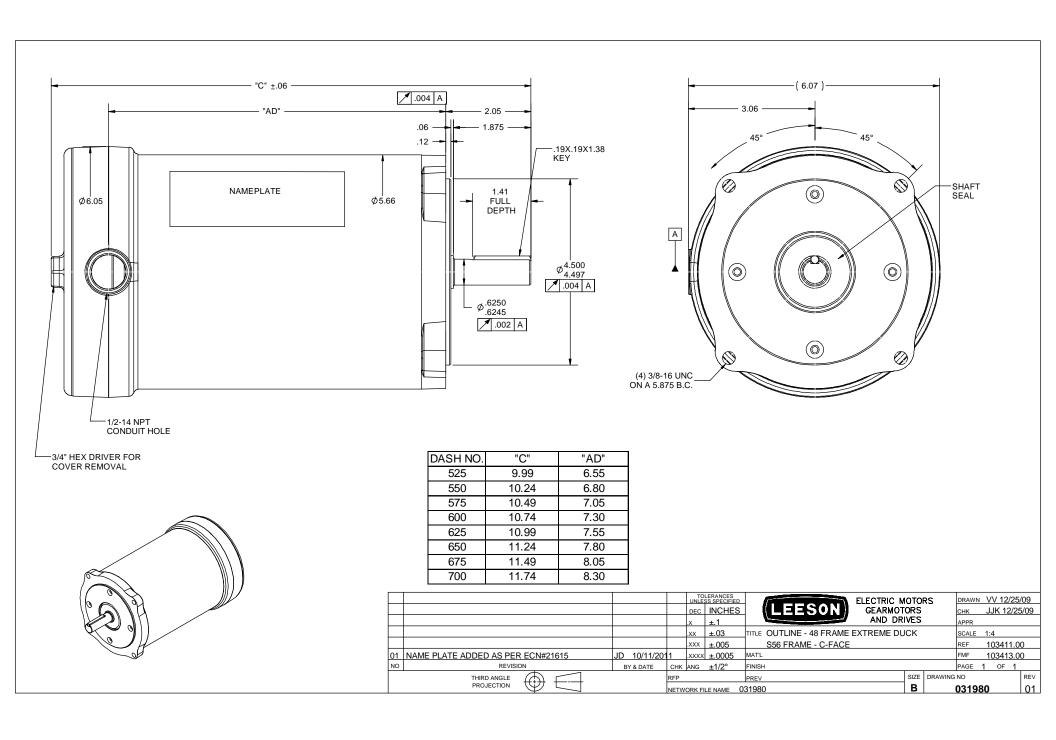

Uncontrolled Copy

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

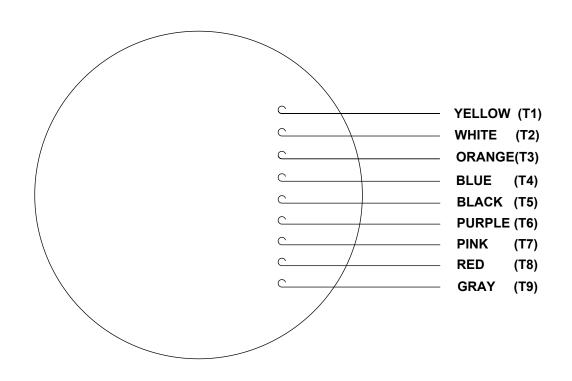

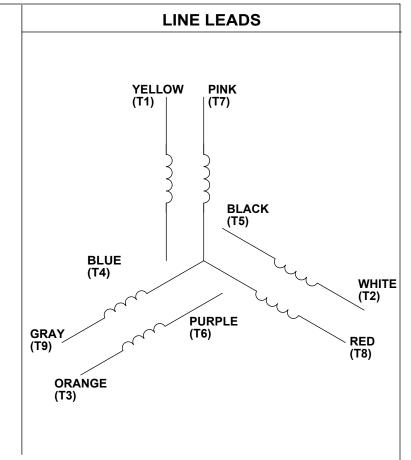

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of REGAL BELOIT CORPORATION ("RBC") including
its subsidiaries and divisions and contains proprietary information of RBC. This document
is loaned on the express condition that neither it nor the information contained therein shall
be disclosed to others without the express written consent of RBC, and that the information
shall be used by the recipient only as approved expressly by RBC. This document shall be
returned to RBC upon its request. This document may be subject to certain restrictions
under U.S. export control laws and regulations.

VOLTAGE	TAGE L1 L2 L3		L3	JOIN & INSULATE		
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)		
LOW	T1,T7	T2,T8	Т3,Т9	T4,T5,T6		

DRAWING REVISION	REVISION BY	DATE	
С	PVR	04/23/14	
ECO	APPROVED BY	DATE	
ECO-0049985	JD	04/23/14	
ECO DESCRIPTION			

UPDATED PER ECO-0049985

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF
REGAL BELOIT AMERICA, INC. "COWNER") AND CONTAINS OWNER'S PROPRIETARY
INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,
BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED
TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT
AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL
BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN
RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	DEC. INCH mm ANGLE
	$\begin{array}{ c c c c c c c c c c c c c c c c c c c$
_	.XX ±0.01 [±0.25]
	XXX ±0.005 [±0.127]
_	.XXXX ±0.0005 [±0.0127]
	REMOVE BURRS & BREAK SHARP
	EDGES: .003/.015 [.076/.381]
	CORNER FILLETS: .02 [.51]
	MACHINED SURFACES: 125/ 3.2/
	INCH ∨ mm ∨
	mm SHOWN IN [BRACKETS]

DRAWN BY LST DATE 4/3/14		REGAL [™] Regal Beloit America, Inc.					
APPROVED BY	DESCF	RIPTION					
		LEAD ASSY					
DATE		EXT. WIRING DIA. 3 PH. W/O PROT.					
		EXT. WIRING DIA. 3 FH. W/O FROT.					
PROCESS/FINISH	MATER	RIAL					
THIRD ANGLE 🚓	SIZE	DRAWING N	NUMBER				SHEET
PROJECTION (**)	<u>-</u>			005010	52		1 OF 1
'	/ \				U <u>Z</u>		

