

PRODUCT INFORMATION PACKET



Model No: C6T17WK40A

Catalog No: 191950.00

..3/4HP..1800RPM.56C.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.RIGID C.....STAINLESS
WASHDOWN.....

Paint Free



Regal and Leeson are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2018 Regal Beloit Corporation, All Rights Reserved. MC017097E





Nameplate Specifications



Output HP	0.75 Hp	Output KW	0.56 kW
Frequency	60 Hz	Voltage	208-230/460 V
Current	2.4-2.3/1.2 A	Speed	1740 rpm
Service Factor	1.15	Phase	3
Efficiency	82.5 %	Duty	Continuous
Insulation Class	F	Design Code	B
KVA Code	L	Frame	56C
Enclosure	Totally Enclosed Fan Cooled	Overload Protector	No
Ambient Temperature	40 °C	Drive End Bearing Size	6205
Opp Drive End Bearing Size	6205	UL	Recognized
CSA	Y	CE	Y
IP Code	43		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Mounting	Rigid base	Motor Orientation	HORIZONTAL
Drive End Bearing	BALL	Opp Drive End Bearing	BALL
Frame Material	Stainless Steel	Shaft Type	T
Overall Length	13.77 in	Frame Length	5.49 in
Shaft Diameter	0.625 in	Shaft Extension	1.88 in
Assembly/Box Mounting	F1 ONLY		
Outline Drawing	TBD	Connection Diagram	005010.01

005010-01

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

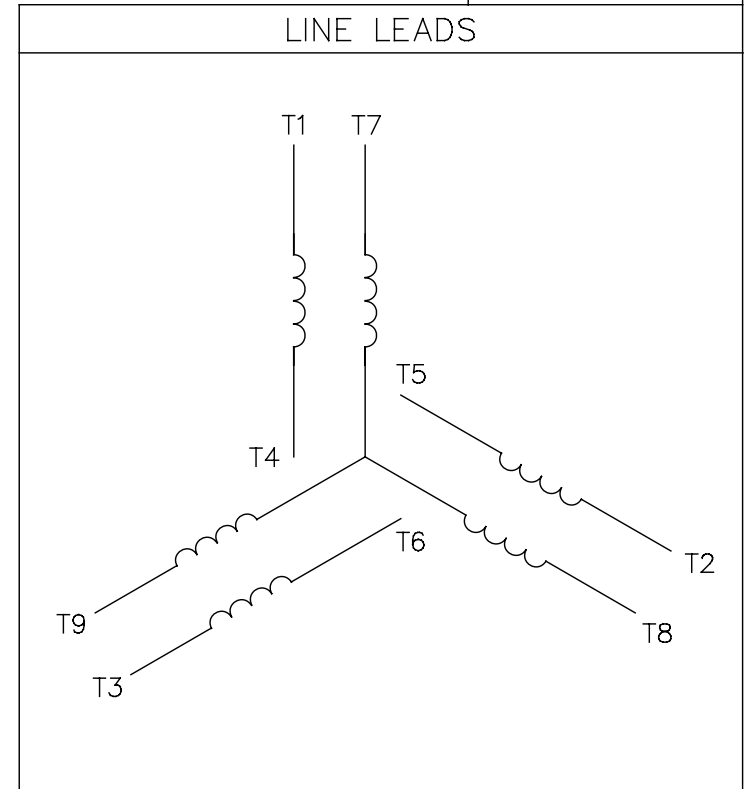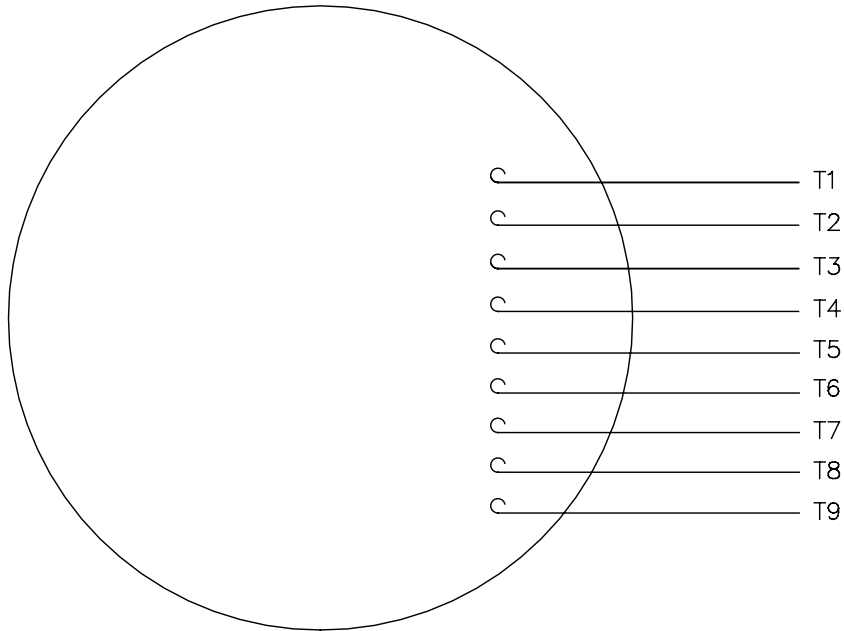


VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	T3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

		TOLERANCES UNLESS SPECIFIED		Regal Beloit America, Inc.		DRAWN RDW 04/12/02	
		DEC.	INCHES			CHK	
		.X	±.1	TITLE EXTERNAL WIRING DIAGRAM 3 PHASE W/O PROTECTOR		APPD	
		.XX	±.01			SCALE 1=1	
		.XXX	±.005			REF FIG.2-51	
A	UPDATED TO REGAL LOGO	SAJ	06/26/15	AJY	.XXXX ±.0005	MAT'L. DECAL - 004014	
NO.	REVISION	BY & DATE	CHK	ANG	±1/2"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	04/12/02	CAD FILE	00501001
				DIST	BRF-NLV	SIZE	DRAWING NO.
						A	005010-01
							REV. A



Motor Load Data						
Load	0%	25%	50%	75%	100%	LR
Current (Amps)	0.70	0.77	0.87	1.00	1.15	9.3
Torque (ft-lb)	0.00	144	288	432	576	10,384
RPM	1800	1787	1776	1763	1752	0
Efficiency (%)		69.7	80.9	84.0	82.6	83.8
P.F. (%)	14.0	33.4	50.6	63.1	74.0	77.8

Motor Speed Data						Information Block																				
LR	Pull-Up	BD	Rated	Idle		HP	Sync. RPM	Frame	Enclosure	Construction	Voltage	Frequency	Design	LR Code letter	Service Factor	Temp Rise @ FL	Duty	Ambient	Elevation	Rotor/Shaft wk ²	Ref Wdg	Sound Pressure @ 1M	VFD Rating	Outline Dwg	Conn. Diag	Additional Specifications:
0	900	1656	1752	1800		0.8	1800	56	TEFC	NA	208-230/460#190/380	60	B	L	1.15	0	CONT	40	1,000	-1.00	0	NONE	TBD	005010.01		
Current (Amps)	9.3	8.6	5.6	1.15	0.70													°C	feet	LB-Ft ²		dB(A)				
Torque (ft-lb)	1,857	1,809	2,610	576	0.00																					

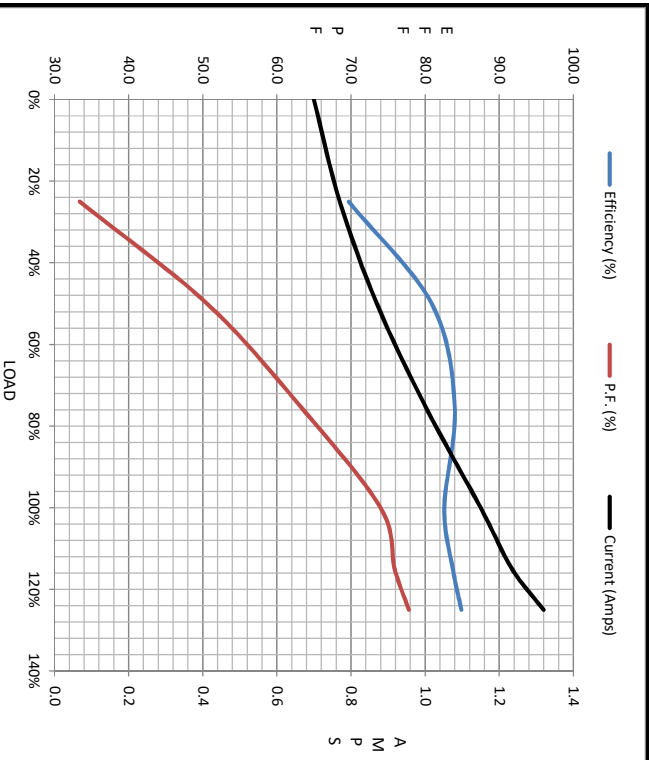

R1	R2	X1	X2	Xm
0.0000	0.0000	0.0000	0.0000	0.0000

