




FRONT VIEW

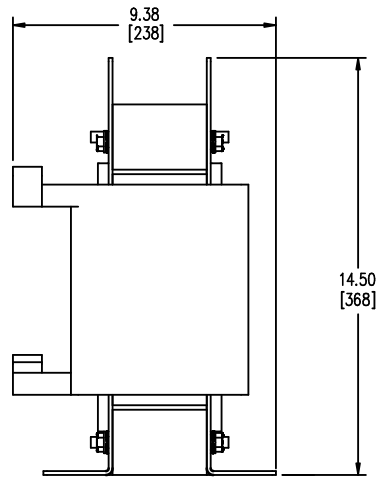


SIDE VIEW

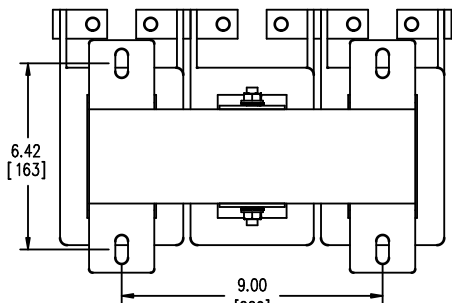

BOTTOM VIEW



TERMINAL DETAIL



MTG SLOT DETAIL



TOLERANCES  
MOUNTING CENTERS =  $\pm .06"$   
MOUNTING HOLE SIZE =  $\pm .005"$

THIS DRAWING CONTAINS PROPRIETARY INFORMATION  
BELONGING TO HAMMOND POWER SOLUTIONS INC.,  
AND IS NOT FOR GENERAL DISTRIBUTION

All Dimensions in Inches  
mm in Parenthesis

REACTOR



Hammond  
Power Solutions

# HPS CENTURION R THREE PHASE LINE REACTOR P/N CRX0273DC

INDUCT. 0.08 MH 50/60 HZ 273 AMPS

0.6 KV CLASS WT: 84 lbs IP00

AMBIENT: 50° TEMP CLASS: 220 TYPE JR-2

USE WITH SUITABLY RATED LISTED (ZMVV) LUGS

WINDING TERMINAL TEMPERATURE: 75° C



MADE IN CANADA  
IND. CONT. EQ. E61431

f003782e

NOTES:



Hammond Power  
Solutions Inc.

TITLE: PROTOTYPE REACTOR

DES: PBAKER
DATE: 14/07/04
SCALE: NTS

SHEET 1 OF 1

EDBCRX0273DC

0.2 jwen 2023/01/31 11:49